NOT MEASUREMENT SENSITIVE

MIL-L-11484/175A
20 March 1991
SUPERSEDING
MIL-L-11484/175
19 November 1990

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, UNIT COMMENDATION, COAST GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

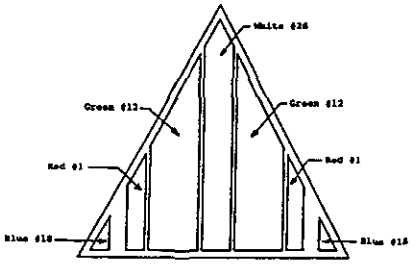

MATERIAL: Gilding metal

DIMENSIONS:
HEIGHT: 9/16 inch (1.43 cm) (REF)
WIDTH: 5/8 inch (1.59 cm) (REF)
THICKNESS: .060 inch ± .005 inch (0.152 cm ± 0.012 cm)

FINISH: Hard enameled, gold plated, mirror-like polished

NOTES:
1. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	14
Green	12
Red	1
White	28

2. Attaching device shall be prong with pick and flat ball clutch type. The prong shall be centered on and fused or soldered to the back of the lapel button.
3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - CG
DLA - CT

(Project No. 8455-0582)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:10Z
Check the source to verify that this is the current version before use.