NOT MEASUREMENT SENSITIVE


MIL-L-11484/178
14 March 1991

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, FEDERAL EMPLOYEE SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

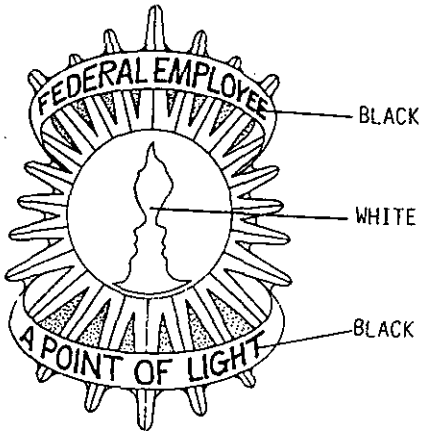

MATERIAL: Gilding Metal

DIMENSIONS:
HEIGHT (Overall): 7/8 inch (2.22 cm) (REF)
WIDTH: (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS: .090 inch ± .005 inch (0.228 cm ± 0.012 cm)

FINISH: Hard enameled, gold plated, mirror-like polish.

NOTES:
1. The attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

2. Each lapel button shall be mounted and centered on a sulfite board 0.030 inch (0.076 cm) in thickness (minimum) and approximately 3-3/4 inches (9.53 cm) in length by 2-1/4 inches (5.72 cm) wide. The face of the sulfite board shall be covered with colbalt blue flock. The mounted sulfite board shall be placed in a rigid hinged plastic box having a transparent lid and opaque white bottom section. The box shall have two plastic hinges and catches and shall be approximately 3 inches (7.62 cm) in length and 1-1/4 inches (3.18 cm) wide and 3/4 inch (1.91 cm) in overall depth.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public released; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:12Z
Check the source to verify that this is the current version before use.

3. The enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

Custodian:
Army - IH

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0575)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:12Z
Check the source to verify that this is the current version before use.