NOT MEASUREMENT SENSITIVE


MIL-D-3943/68D
7 August 1991
SUPERSEDING
MIL-D-3943/68C
19 December 1989

MILITARY SPECIFICATION SHEET

DECORATION, SUPERIOR CIVILIAN SERVICE AWARD, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

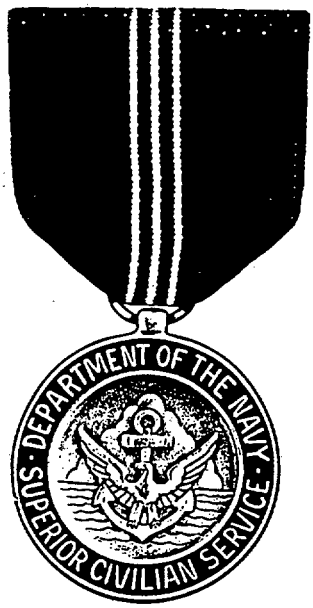

MATERIAL: Gilding metal

DIMENSIONS:
HEIGHT (INCLUDING LUG): 1-13/32 inch (3.37 cm) (REF)
DIAMETER: 1-1/4 inch (3.18 cm) (REF)
THICKNESS (ON THE EDGE): .090 inch ± .010 inch (0.228 cm ± 0.025 cm)

FINISH: Hard enameled, nickel plated, silver plated, oxidized, relieved, matte finish.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:16Z
Check the source to verify that this is the current version before use.

NOTES:

1. The enamel color shall conform to the TIOH Color Chip No. 18 or the standard sample.
2. The reverse side shall be flat and suitable for engraving.
3. Type I decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, style 6, Type VIII with a class 1 or 1A pad.
4. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/174.
5. The lapel button shall conform to MIL-L-11484/38.
6. The use of any type of plastic packaging material is prohibited.

Custodians:
Army - IH
Navy - NU

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-N611)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:16Z
Check the source to verify that this is the current version before use.