NOT MEASUREMENT SENSITIVE


MIL-D-3943/73C
12 June 1992
SUPERSEDING
MIL-D-3943/73B
31 March 1987


MILITARY SPECIFICATION SHEET

DECORATION, EXCEPTIONAL CIVILIAN SERVICE, DIA

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

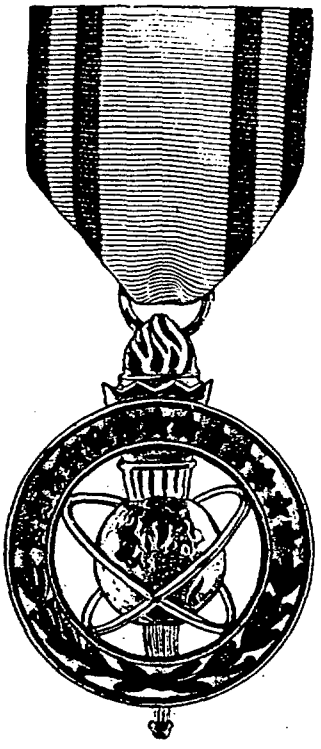

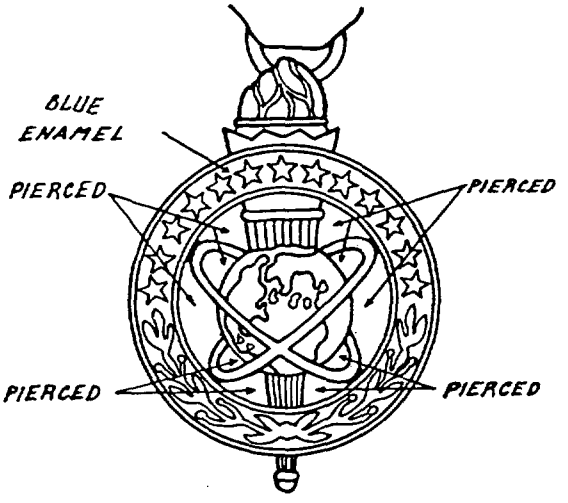

MATERIAL: Gilding Metal

FINISH:
OBVERSE: Hard Enameled, Gold Plated, Matte Finish with Highlights of the World and Torch Polished
REVERSE: Gold Plated, Matte Finish

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:18Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall): 2-3/32 inches (5.32 cm) (REF)
WIDTH (Overall): 1-1/2 inches (3.81 cm) (REF)
THICKNESS (Center of the World): 0.200 inch + 0.010 inch (0.508 cm + 0.025 cm)

NOTES:

1. The lug shall be soldered on the vertical center line of the torch with the center of the lug located 5/32 inch + 1/32 inch (0.40 cm + 0.08 cm) below the top of the torch.

2. Enameled area shall be blue as indicated. The color shall conform to TIOH Color Chip No. 18 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

4. Pierced areas shall be as indicated.

5. The reverse of the pendant shall be flat.

6. Type I Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Style 6, Type VIII with a Class 1 or 1A pad.

7. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/183.

8. The lapel button shall conform to MIL-L-11484/92.

9. The term (REF) refers to the measurements taken from the Government furnished hub and die.

Custodians:
Army - IH

Review activities:
DLA - CT

User activity:
Other - DIA

Preparing activity:
Army - IH

(Project No. 8455-0669)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:18Z
Check the source to verify that this is the current version before use.