NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/74D
1 May 1997
SUPERSEDING
MIL-D-3943/74C
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, MERITORIOUS CIVILIAN SERVICE AWARD, DEFENSE INTELLIGENCE AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

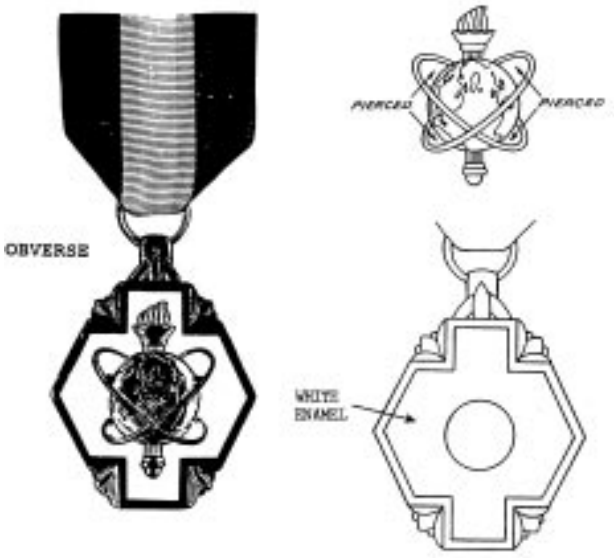

MATERIAL:
BASE: Gilding Metal
DEVICE: Red Brass

FINISH:
BASE:
OBVERSE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
REVERSE: Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:

HEIGHT (Including Lug): 1-15/16 inches (2.38 cm) (REF)
WIDTH (Overall): 1-1/2 inches (3.81 cm) (REF)
THICKNESS (Thickest Point): 0.070 inch ± 0.005 inch (0.178 cm ± 0.012 cm)

DEVICE:

HEIGHT (Overall): 1-1/4 inches (4.45 cm) (REF)
WIDTH (Overall): 3/4 inch (1.91 cm) (REF)
THICKNESS (Center of Globe): 0.210 inch ± 0.010 inch (0.533 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

2. Enameled area shall be white as indicated. The color shall conform to TIOH Color Chip No. 28 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The device shall be soft soldered to base as shown.

5. The reverse of the base shall be flat.

6. Pierced areas shall be as indicated.

7. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/184.

9. The lapel button shall conform to MIL-DTL-11484/93.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
DIA - DI

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.