INCH-POUND

MIL-DTL-3943/74G
30 September 2008
SUPERSEDING
MIL-DTL-3943/74F
15 October 2007

DETAIL SPECIFICATION SHEET

DECORATION, AWARD FOR EXCELLENCE, DEFENSE INTELLIGENCE AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

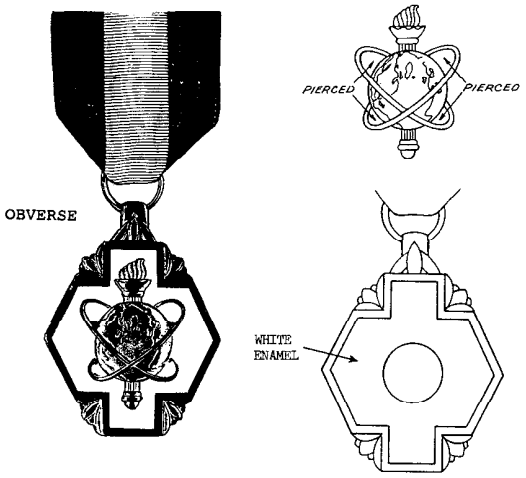

MATERIAL:
BASE: Gilding Metal
DEVICE: Red Brass

FINISH:

BASE:
OBVERSE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
REVERSE: Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:
HEIGHT (including lug): 1-15/16 inches (REF)
WIDTH (overall): 1-1/2 inches (REF)
THICKNESS (thickest point): 0.070 inch ± 0.005 inch
DEVICE:
HEIGHT (overall): 1-1/4 inches (REF)
WIDTH (overall): 3/4 inch (REF)
THICKNESS (center of globe): 0.210 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

2. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass. Enameled area shall be white as indicated. The color shall conform to TIOH Hard Enamel Color Chip Number 28.

3. The device shall be soft soldered to base as shown.

4. The reverse of the base shall be flat.

5. Pierced areas shall be as indicated.

6. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

7. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/184.

8. The lapel button shall conform to MIL-DTL-11484/93.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH
DIA - DI

Preparing activity:
Army - IH
(Project No. 8455-2008-199)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.