NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/74H
9 March 2020
SUPERSEDING
MIL-DTL-3943/74G
30 September 2008

DETAIL SPECIFICATION SHEET


DECORATION, AWARD FOR EXCELLENCE, DEFENSE INTELLIGENCE AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

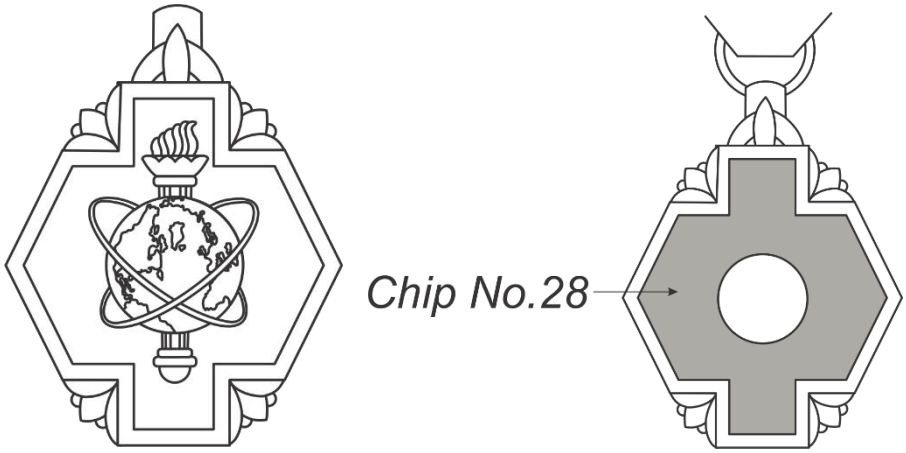

OBVERSE

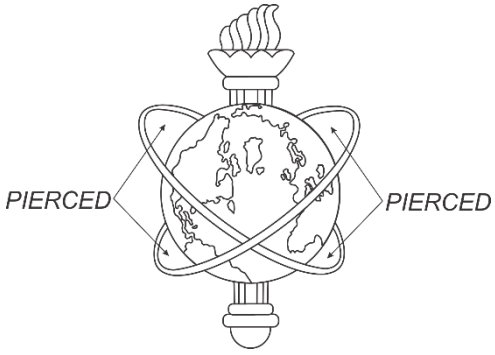

DEVICE

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

MATERIAL: BASE and DEVICE: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE:
OBVERSE: 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
REVERSE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
DEVICE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
BASE:
HEIGHT (Including lug): 1-15/16 inches (REF)
WIDTH (Overall): 1-1/2 inches (REF)
THICKNESS (Thickest point): 0.070 inch ± 0.005 inch
DEVICE:
HEIGHT (Overall): 1-1/4 inches (REF)
WIDTH (Overall): 3/4 inch (REF)
THICKNESS (Center of globe): 0.210 inch ± 0.010 inch

Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

2. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass. Enameled area shall be white as indicated. The color shall conform to TIOH Hard Enamel Color Chip Number 28.

3. The device shall be soft soldered to base as shown.

4. The reverse of the base shall be flat.

5. Pierced areas shall be as indicated.

6. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon shall conform to MIL-DTL-11589/184.

7. The specification slash sheet for the lapel button shall conform to MIL-DTL-11484/93.

Changes from previous issue Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
DIA - DI

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-187)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.