NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/75E
1 May 1997
SUPERSEDING
MIL-D-3943/75D
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, PRESIDENTIAL CITIZENS MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

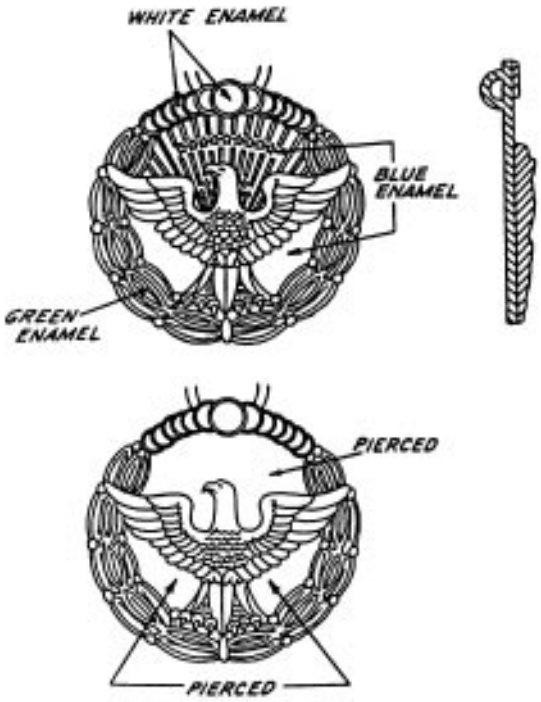

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
  DIAMETER:
      - 1: 1-5/8 inches (4.13 cm) (REF)
       -2: 13/16 inch   (2.06 cm) (REF)

  THICKNESS:
    DEVICE (At Eagle's Breast):
       -1: 0.150 inch (0.381 cm) (REF)
       -2: 0.100 inch (0.254 cm) (REF)

    BASE (On Shield Stripes):
       -1: 0.110 inch (0.279 cm) (REF)
       -2: 0.070 inch (0.178 cm) (REF)

    ASSEMBLED (At Eagle's Breast)
       -1: 0.240 inch + 0.010 inch (0.610 cm + 0.025 cm)
       -2: 0.170 inch + 0.010 inch (0.432 cm + 0.025 cm)

NOTES:
    1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

    2. Enameled areas shall be as indicated. The color shall conform to TIOH Color Chip Numbers listed below or the standard sample.

COLOR	CHIP NO.
Green	11
Blue	20
White	28

    3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

    4. Pierced areas shall be as indicated.

    5. The pendant shall be fabricated in two pieces and soft soldered together after enameling. The parting line between the base and device shall not be visible after finishing.

    6. The lug shall be formed from a half circle of brass wire and shall be soldered in the location shown. The lug for Dash No. 1 shall be formed from 0.050 inch ± 0.003 inch (0.127 cm ± 0.008 cm) diameter wire and shall have an outside diameter of 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm). The lug for Dash No. 2 shall be formed from 0.025 inch ± 0.002 inch (0.064 cm ± 0.005 cm) diameter wire and shall have an outside diameter of 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm).

    7. A forcer may be used to bring up the details of the eagle and the device.

    8. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A OR 3 pad.

    9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/179.

   10. The lapel button shall conform to MIL-DTL-11484/94.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.