NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/75F
11 May 1999
SUPERSEDING
MIL-DTL-3943/75E
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, PRESIDENTIAL CITIZEN'S MEDAL

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

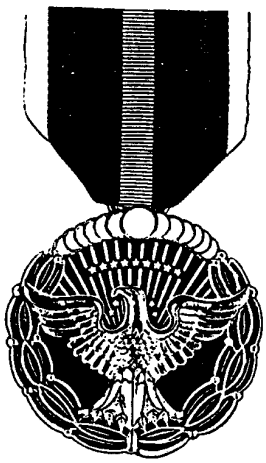

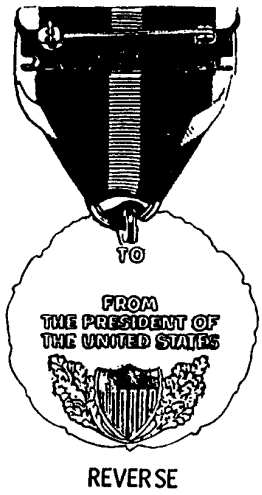

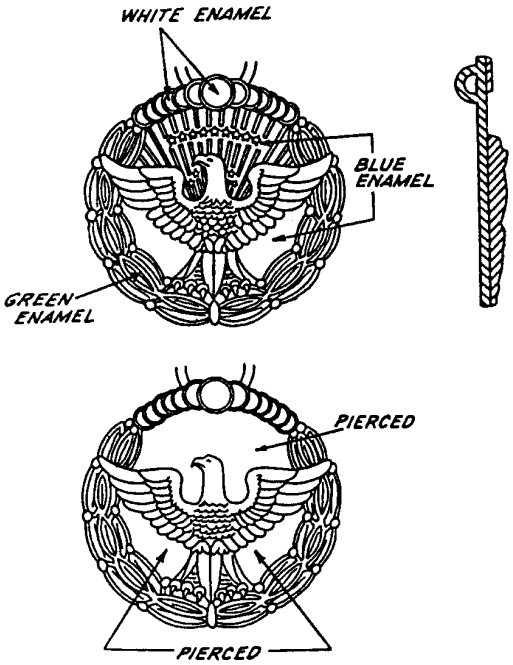

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:
- 1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)

THICKNESS:
DEVICE (at eagle's breast):
-1: 0.150 inch (REF)
-2: 0.100 inch (REF)
BASE (on shield stripes):
-1: 0.110 inch (REF)
-2: 0.070 inch (REF)
ASSEMBLED (at eagle's breast)
-1: 0.240 inch + 0.010 inch
-2: 0.170 inch + 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

2. Enameled areas shall be as indicated. The color shall conform to TIOH Hard Enamel Color Chip Numbers listed below.

COLOR	CHIP NO.
Green	11
Blue	20
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

4. Pierced areas shall be as indicated.

5. The pendant shall be fabricated in two pieces and soft soldered together after enameling. The parting line between the base and device shall not be visible after finishing.

6. The lug shall be formed from a half circle of brass wire and shall be soldered in the location shown. The lug for Dash No. 1 shall be formed from 0.050 inch ± 0.003 inch diameter wire and shall have an outside diameter of 1/4 inch ± 1/64 inch. The lug for Dash No. 2 shall be formed from 0.025 inch ± 0.002 inch diameter wire and shall have an outside diameter of 1/8 inch ± 1/64 inch.

7. A forcer may be used to bring up the details of the eagle and the device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

8. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A OR 3 pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/179.

10. The lapel button shall conform to MIL-DTL-11484/94.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0978)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.