INCH-POUND

MIL-DTL-3943/75J
15 October 2007
SUPERSEDING
MIL-DTL-3943/75H
14 January 2002

DETAIL SPECIFICATION SHEET


DECORATION, PRESIDENTIAL CITIZEN'S MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.




OBVERSE

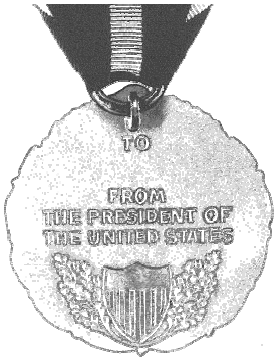


REVERSE



PROFILE

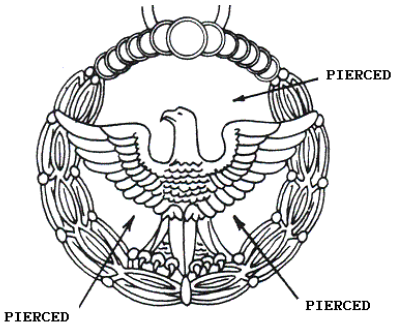

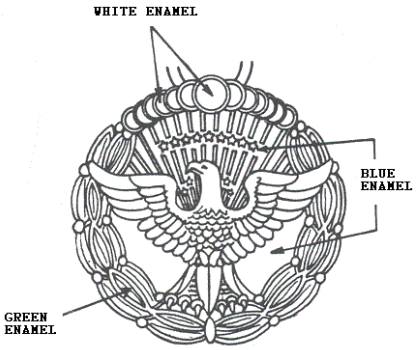

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH: Hard Enameled or Epoxied, Gold Plated, Matte Finished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:
- 1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)

THICKNESS:
DEVICE (at eagle's breast):
-1: 0.155 inch (REF)
-2: 0.100 inch (REF)
BASE (on shield stripes):
-1: 0.110 inch (REF)
-2: 0.070 inch (REF)
ASSEMBLED (at vertical center of eagle's breast)
-1: 0.275 inch ± 0.010 inch
-2: 0.170 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

2. Enameled/epoxied areas shall be as shown. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be either red brass or gilding material. Colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below:

COLOR	CHIP NO.
Green	11
Blue	20
White	28

3. Pierced areas shall be as indicated.

4. The pendant shall be fabricated in two pieces and soft soldered together after being enameled/epoxied. The parting line between the base and device shall not be visible after finishing.

5. The lug shall be formed from a half circle of brass wire and shall be soldered in the location shown. The lug for -1 shall be formed from 0.050 ± 0.003 inch diameter wire and shall have an outside diameter of 1/4 ± 1/64 inch. The lug for -2 shall be formed from 0.025 ± 0.002 inch diameter wire and shall have an outside diameter of 1/8 ± 1/64 inch.

6. A forcer may be used to bring up the details of the eagle and the device.

7. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 7 with a Class 1, 1A, or 3 pad.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/179. The pendant drape for -1 shall measure 1-7/8 inches ± 1/16 inch in length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

9. The lapel button shall conform to MIL-DTL-11484/94.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2008-016)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.