NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/75L
4 December 2020
SUPERSEDING
MIL-DTL-3943/75K
29 August 2016

DETAIL SPECIFICATION SHEET


DECORATION, PRESIDENTIAL CITIZEN'S MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.




OBVERSE

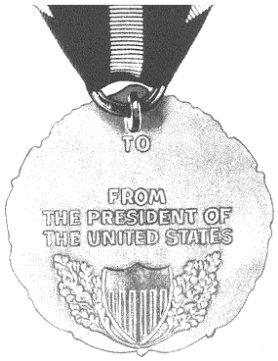


REVERSE



PROFILE

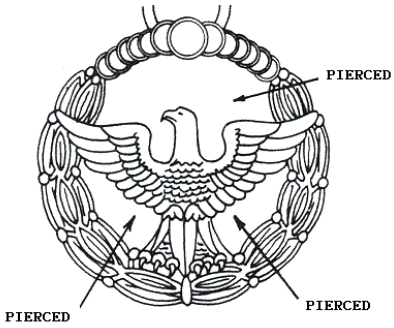

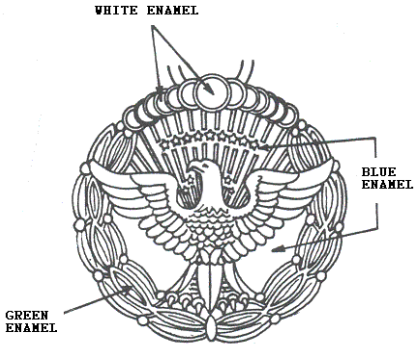

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal 95/5 (UNS Alloy No. C-210)

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

FINISH: Epoxy resin, 24KGold Plated, Matte Finished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7

DIMENSIONS:
DIAMETER:
-1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)
THICKNESS:
DEVICE (At eagle's breast):
-1: 0.155 inch (REF)
-2: 0.100 inch (REF)
BASE (On shield stripes):
-1: 0.110 inch (REF)
-2: 0.070 inch (REF)
ASSEMBLED (At vertical center of eagle's breast)
-1: 0.275 inch ± 0.010 inch
-2: 0.170 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, miniature size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 7 with a Class 1, 1A, or 3 pad.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#11
Blue	#20
White	#28

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

2. Pierced areas shall be as indicated.

3. The pendant shall be fabricated in two pieces and soft soldered together after being epoxied. The parting line between the base and device shall not be visible after finishing.

4. The lug shall be formed from a half circle of brass wire and shall be soldered in the location shown. The lug for -1 shall be formed from 0.050 ± 0.003 inch diameter wire and shall have an outside diameter of 1/4 ± 1/64 inch. The lug for -2 shall be formed from 0.025 ± 0.002 inch diameter wire and shall have an outside diameter of 1/8 ± 1/64 inch.

5. A forcer may be used to bring up the details of the eagle and the device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

6. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/179. The pendant drape for -1 shall measure 1-7/8 inches ± 1/16 inch in length.

7. The specification slash sheet for the lapel button is MIL-DTL-11484/94.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-024)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.