NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/75M
4 October 2021
SUPERSEDING
MIL-DTL-3943/75L
4 December 2020

DETAIL SPECIFICATION SHEET


DECORATION, PRESIDENTIAL CITIZEN'S MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

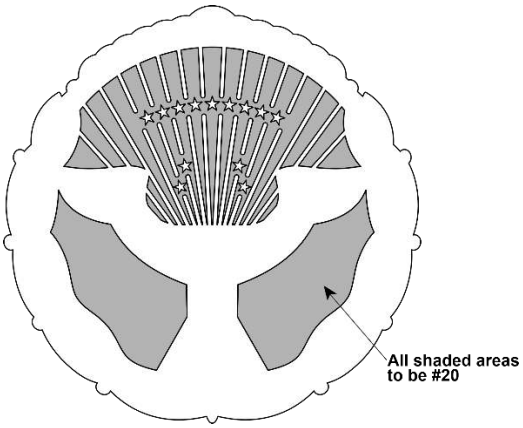

BASE

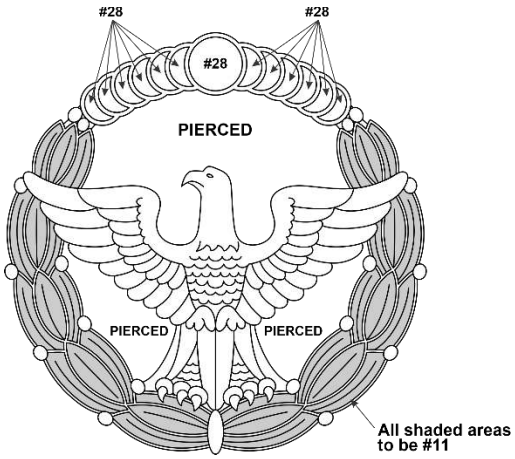

DEVICE

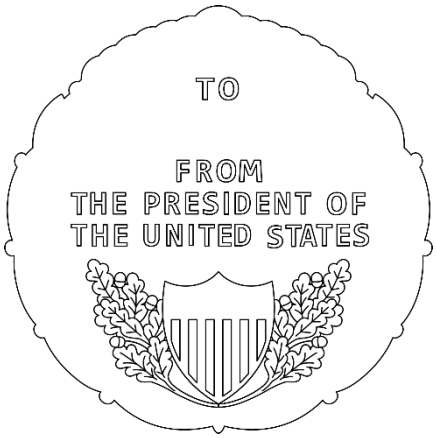

REVERSE



ASSEMBLED

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, 24KGold Plated, Matte Finished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7

DIMENSIONS:
DIAMETER:
-1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)
THICKNESS:
DEVICE (At eagle's breast):
-1: 0.155 inch (REF)
-2: 0.100 inch (REF)
BASE (On shield stripes):
-1: 0.110 inch (REF)
-2: 0.070 inch (REF)
ASSEMBLED (At vertical center of eagle's breast)
-1: 0.275 inch ± 0.010 inch
-2: 0.170 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, miniature size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type IV Case, Class 5 or 7. The following text shall be inscribed on the presentation case using 2 lines; (Line 1) THE PRESIDENTIAL (line 2) CITIZENS MEDAL

EPOXY: Epoxy resin shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. The base shall have stoning epoxy and the device shall have floating epoxy.

TIOH HARD ENAMEL COLOR CHIPS	
Color and Chip Number	**Location**
Green #11	Wreath
Blue #20	Background Base
White #28	Clouds

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub and die.

2. Pierced areas shall be as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.

3. The base and device shall be assembled using soft solder or glue. The parting line between the base and device shall not be visible after finishing.

4. The lug shall be formed from a half circle of brass wire and shall be soldered and placed on the vertical centerline above the word “to”. The lug for -1 shall be formed from 0.050 ± 0.003 inch diameter wire and shall have an outside diameter of 1/4 ± 1/64 inch. The lug for -2 shall be formed from 0.025 ± 0.002 inch diameter wire and shall have an outside diameter of 1/8 ± 1/64 inch.

5. A forcer may be used to bring up the details of the eagle.

6. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/179. The pendant drape for -1 shall measure 1-7/8 inches ± 1/16 inch in length.

7. The specification slash sheet for the lapel button is MIL-DTL-11484/94.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-762)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:19Z
Check the source to verify that this is the current version before use.