NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/76D
11 May 1999
SUPERSEDING
MIL-DTL-3943/76C
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, CONGRESSIONAL SPACE MEDAL OF HONOR

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

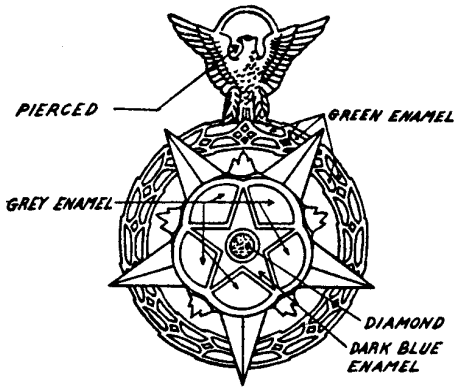

OBVERSE

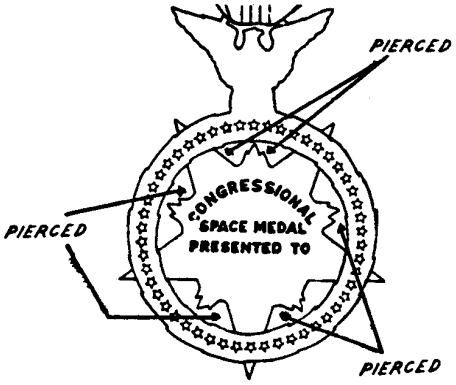

REVERSE

MATERIAL: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:

OBVERSE: Hard Enameled, Gold Plated, Rose Gold Plated, Relieved, Matte Finish.
REVERSE: Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights on Letters and Stars.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:
DIAMETER:
-1: 1-7/8 inches (REF)
-2: 15/16 inch (REF)
HEIGHT (overall):
-1: 2-3/4 inches (REF)
-2: 1-3/8 inch (REF)
THICKNESS (on wreath):
-1: 0.090 inch ± 0.010 inch
-2: 0.070 inch ± 0.010 inch

DEVICE:
DIAMETER (circumscribed):
-1: 2 inches (REF)
-2: 1 inch (REF)
THICKNESS (at center of device):
-1: 0.175 inch ± 0.010 inch
-2: 0.095 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The diamond shall be 0.25 carat for Dash No. -1 and 0.03 carat for Dash No. -2.

3. The diamond shall be set in the pendant with a minimum of 4 beads.

4. Enameled areas shall be as indicated. The colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below.

COLOR	CHIP NO.
Green	11
Blue	20
Gray	34

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

6. Pierced areas on the base shall be as indicated.

7. The device shall be soft soldered to the base in the location shown.

8. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XI, Style 2 with a Class 1 or 1A pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/180.

10. The lapel button shall conform to MIL-DTL-11484/95.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0978)

Civil Agency Coordinating Activities:
NASA - NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.