NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/76E
17 April 2006
SUPERSEDING
MIL-DTL-3943/76D
11 May 1999

DETAIL SPECIFICATION SHEET

DECORATION, CONGRESSIONAL SPACE MEDAL OF HONOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943.

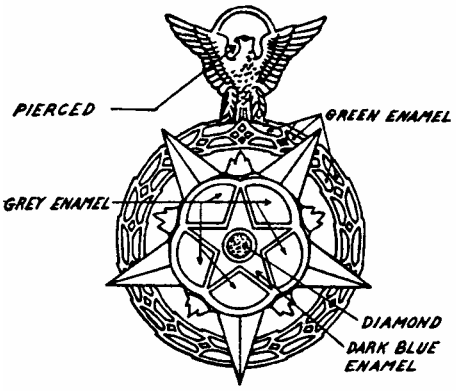

OBVERSE

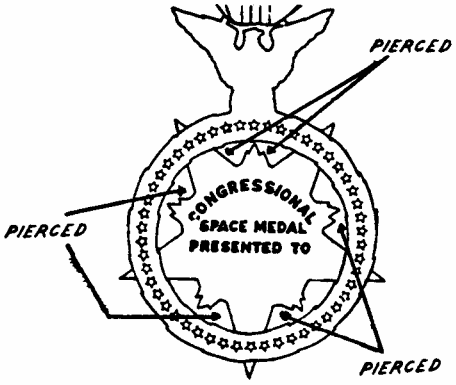

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH:

OBVERSE: Hard Enameled, Gold Plated, Relieved, Matte Finish.
REVERSE: Gold Plated, Matte Finish, Polished Highlights on Letters and Stars.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:
DIAMETER:
-1: 1-7/8 inches (REF)
-2: 15/16 inch (REF)
HEIGHT (overall):
-1: 2-3/4 inches (REF)
-2: 1-3/8 inch (REF)
THICKNESS (on wreath):
-1: 0.120 inch ± 0.010 inch
-2: 0.070 inch ± 0.010 inch

DEVICE:
DIAMETER (circumscribed):
-1: 2 inches (REF)
-2: 1 inch (REF)
THICKNESS (at center of device):
-1: 0.210 inch ± 0.010 inch
-2: 0.095 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The diamond shall be 0.25 carat for Dash No. -1 and 0.03 carat for Dash No. -2.

3. The diamond shall be set in the pendant with a minimum of 4 beads.

4. Enameled areas shall be as indicated. The colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below.

COLOR	CHIP NO.
Green	11
Blue	20
Gray	34

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

6. Pierced areas on the base shall be as indicated.

7. The device shall be soft soldered to the base in the location shown.

8. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XI, Style 2 with a Class 1 or 1A pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/180.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

10. The lapel button shall conform to MIL-DTL-11484/95.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-2006-023)

Civil Agency Coordinating Activities:
NASA - NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.