NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/76H
22 June 2021
SUPERSEDING
MIL-DTL-3943/76G
29 August 2016

DETAIL SPECIFICATION SHEET

DECORATION, CONGRESSIONAL SPACE MEDAL OF HONOR

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

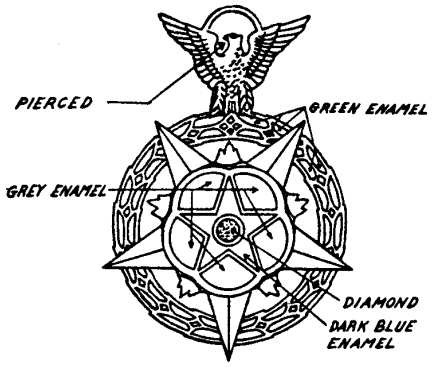

OBVERSE

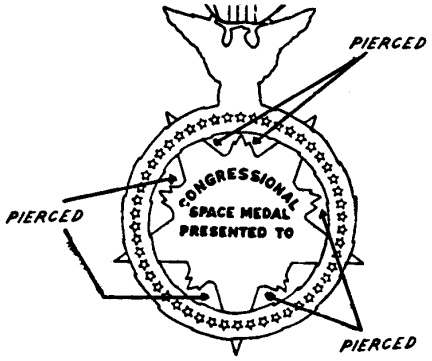

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH:
OBVERSE: Epoxy resin, 24KGold Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.
REVERSE: 24KGold Plated, Matte Finish, Polished Highlights and shall match TIOH metal Finish Chip Number 8 on Letters and Stars.

DIMENSIONS:
BASE:
DIAMETER:
-1: 1-7/8 inches (REF)
-2: 15/16 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

HEIGHT (Overall):
-1: 2-3/4 inches (REF)
-2: 1-3/8 inch (REF)
THICKNESS (On wreath):
-1: 0.120 inch ± 0.010 inch
-2: 0.070 inch ± 0.010 inch
DEVICE:
DIAMETER (Circumscribed):
-1: 2 inches (REF)
-2: 1 inch (REF)
THICKNESS (At center of device):
-1: 0.210 inch ± 0.010 inch
-2: 0.095 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XI, Style 2 with a Class 1 or 1A pad.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#11
Blue	#20
Gray	#34

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The diamond shall be 0.25 carat for -1 and 0.03 carat for -2.

3. The diamond shall be set in the pendant with a minimum of 4 beads.

4. Pierced areas on the base shall be as indicated.

5. The device shall be soft soldered to the base in the location shown.

6. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/180.

7. The specification slash sheet for the lapel button is MIL-DTL-11484/95.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-562)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.