NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/76J(IH)
17 August 2026
SUPERSEDING
MIL-DTL-3943/76H(IH)
22 June 2021

DETAIL SPECIFICATION SHEET


DECORATION, CONGRESSIONAL SPACE MEDAL OF HONOR

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

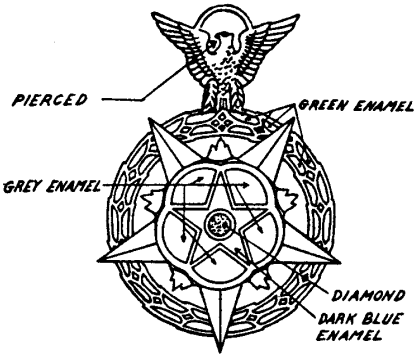

OBVERSE

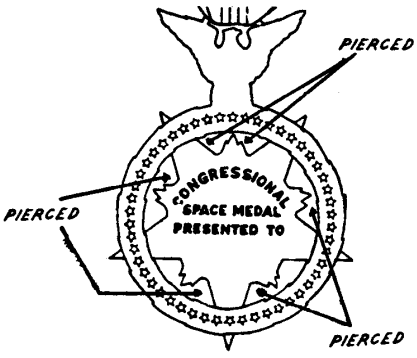

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL (-1 AND -2): Gilding Metal95/5 (UNS Alloy No. C-210)

FINISH:
OBVERSE: Epoxy resin, 24K Gold Plated, Matte Finish and Shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.
REVERSE: 24K Gold Plated Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
BASE:
DIAMETER:
-1: 1-7/8 inches (REF)
-2: 1-5/16 inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

HEIGHT (Overall):
-1: 2-3/4 inches (REF)
-2: 1-3/8 inches (REF)
THICKNESS (On wreath):
-1: 0.120 inch ± 0.010 inch
-2: 0.070 inch ± 0.005 inch

DEVICE:
DIAMETER (Circumscribed):
-1: 2 inches (REF)
-2: 1 inch (REF)
THICKNESS (At center of device):
-1: 0.210 inch ± 0.010 inch
-2: 0.095 inch ± 0.005 inch

DECORATION SET: Decoration set shall consist of regular size medal, a service ribbon, and a lapel button all packed in a presentation case conforming to MIL-DTL-14633, Type VI Class 11 Pad.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Epoxy Color Chip Numbers listed below

TIOH HARD EPOXY COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#11
Blue	#20
Gray	#34

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The diamond shall be 0.25 carat for -1 and 0.03 carat for -2.

3. The diamond shall be set in the pendant with a minimum of 4 beads.

4. Pierced areas on the base shall be as indicated.

5. The device shall be soft soldered to the base in the location shown.

6. The specification slash sheet for the ribbon pendant drape and for the service ribbon is MIL-DTL-11589/180

7. The specification slash sheet for the lapel button is MIL-DTL-11484/95

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-513)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.