NOT MEASUREMENT SENSITIVE


MIL-I-15665/32B
30 July 1992
SUPERSEDING
MIL-I-15665/32A
15 March 1988

MILITARY SPECIFICATION SHEET

INSIGNIA, COLLAR, THE SERGEANT MAJOR OF THE U.S. ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-15665.

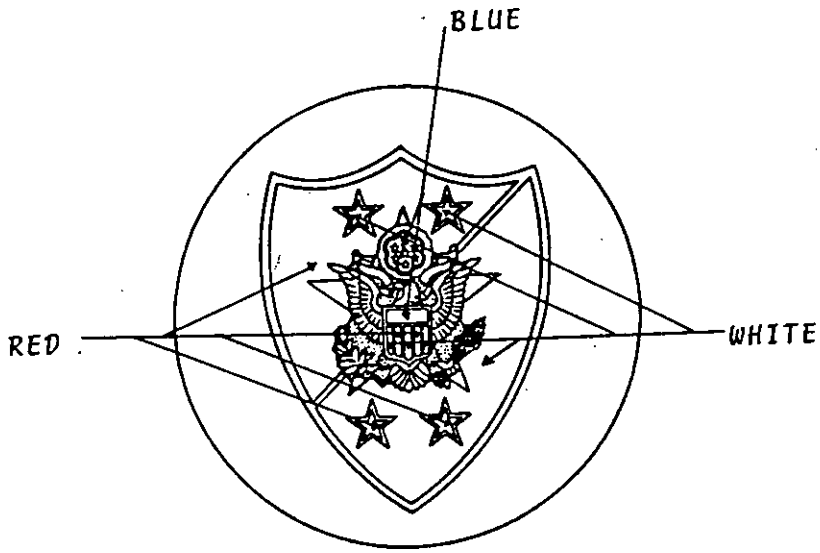

MATERIAL:
SHIELD AND DEVICE: Gilding Metal
DISC: Red Brass

FINISH:
DISC: Mirror-like Polished
SHIELD: Hard Enameled, Star - Nickel Plated; Remainder - Gold Plated, Polished
EAGLE DEVICE: Hard Enameled, Gold Plated, Matte Finish

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T06:40Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DISC:

DIAMETER: 1 inch + 1/64 inch - 0 (2.54 cm + 0.04 cm - 0)

THICKNESS: 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)

EAGLE AND SHIELD:

HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)

THICKNESS (Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

DEVICE:

HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)

THICKNESS (Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTE:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Device shall be secured to the enameled base with two rivets.

3. The rivets shall be solid and shall be fabricated from any type brass. The rivets shall be located on the center line of the device.

4. Enameled color shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	18
White	28

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

6. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) on centers.

7. The star under the device shall be nickel plated.

8. Insignia may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activities:
Army - IH

(Project No. 8455-0680)

Source: https://assist.dla.mil Downloaded: 2026-10-18T06:40Z
Check the source to verify that this is the current version before use.