NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/32D
27 June 1996
SUPERSEDING
MIL-I-15665/32C
29 October 1993

DETAIL SPECIFICATION SHEET

INSIGNIA, COLLAR, ENLISTED, THE SERGEANT MAJOR OF THE U.S. ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

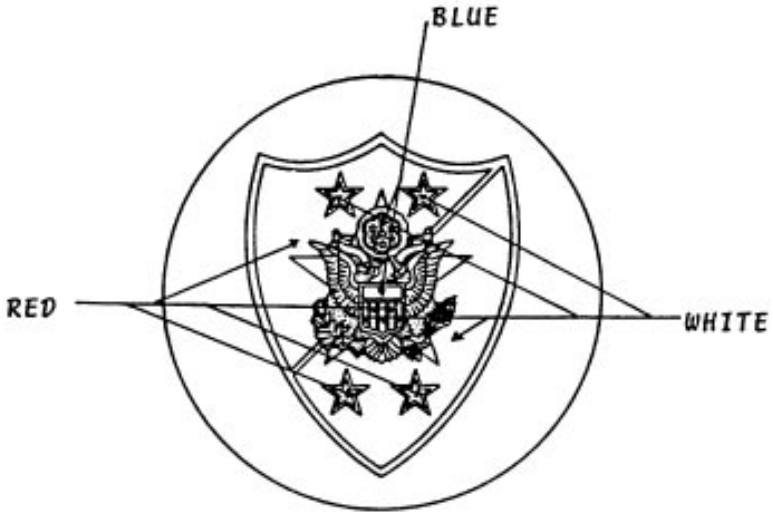

MATERIAL:
SHIELD AND DEVICE: Gilding Metal
DISC: Red Brass

FINISH:
DISC: Mirror-like Polished and shall match TIOH Metal Finish Chip Number 1.
SHIELD: Hard Enameled, Star - Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16; Remainder - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
EAGLE DEVICE: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:39Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DISC: DIAMETER: 1 inch + 1/64 inch - 0 (2.54 cm + 0.04 cm - 0)
THICKNESS: 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)
THICKNESS (Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)
DEVICE:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
THICKNESS (Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Insignia shall consist of three parts to include the disc, the shield and the eagle device.

3. Device shall be secured to the enameled base with two rivets.

4. The rivets shall be solid and shall be fabricated from any type brass. The rivets shall be located on the vertical center line of the device.

5. Enameled color shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	18
White	28

6. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

7. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

8. At the option of the manufacturer for commercial sale only, insignia may be manufactured using 22 karat gold plate with a mirror-like polished finish and nickel underplating which shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0843)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:39Z
Check the source to verify that this is the current version before use.