INCH-POUND

MIL-DTL-15665/32E
12 February 2002
SUPERSEDING
MIL-DTL-15665/32D
27 June 1996

DETAIL SPECIFICATION SHEET

INSIGNIA, COLLAR, ENLISTED, THE SERGEANT MAJOR OF THE U.S. ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

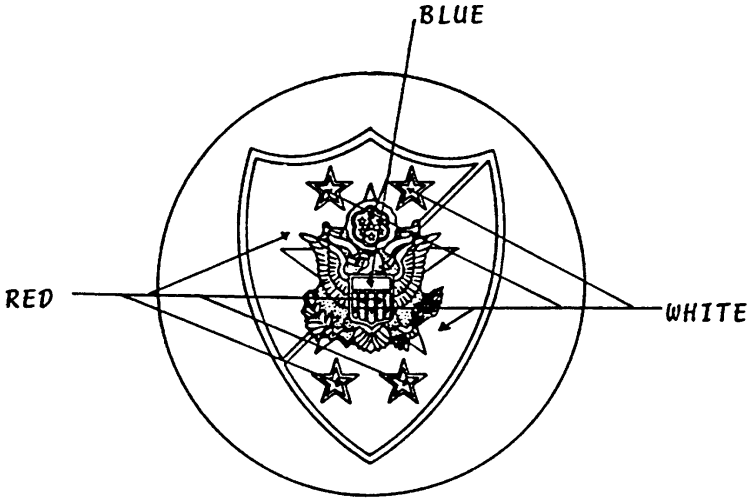

MATERIAL:

DISC: Red Brass
SHIELD AND EAGLE DEVICE: Red Brass or Gilding Metal

FINISH:

DISC: Nickel Plated, 22K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip No. 9.
SHIELD:
- Background: Hard Enameled or Epoxied, Nickel Plated, 22K Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip No. 9.
- Center Star: Nickel Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip No. 16.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:39Z
Check the source to verify that this is the current version before use.

EAGLE DEVICE: Hard Enameled or Epoxied, Nickel Plated, 22K Gold Plated, Matte Finished, and shall match TIOH Metal Finish Chip No. 10.

DIMENSIONS:

DISC:
DIAMETER: 1 inch + 1/64 inch - 0
THICKNESS: 0.040 inch ± 0.005 inch

SHIELD:
HEIGHT (overall): 3/4 inch (REF)
THICKNESS (at thickest point): 0.080 inch ± 0.005 inch

EAGLE DEVICE:
HEIGHT (overall): 3/8 inch (REF)
THICKNESS (at thickest point): 0.060 inch ± 0.005 inch

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Insignia shall consist of three parts: the disc, the shield, and the eagle device.

3. The eagle device shall be secured to the enameled shield with two rivets. The rivets shall be solid and shall be fabricated from any type brass. The rivets shall be located on the vertical center line of the device.

4. Enameled/epoxied colors shall be as indicated. The colors shall conform to TIOH Hard Enamel Color Chip numbers listed below:

COLOR	CHIP NO.
Red	1
Blue	18
White	28

If hard enamel is used, the base metal for the shield and eagle device shall be gilding metal.

5. At the option of the manufacturer for commercial sale only, insignia may be finished as follows:

DISC: 24K Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip No. 6
SHIELD:
- Background: Hard Enameled or Epoxied, 24K Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip No. 9.
- Central Star: Nickel Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip No. 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:39Z
Check the source to verify that this is the current version before use.

EAGLE DEVICE: Hard Enameled or Epoxied, 24K Gold Plated, Matte Finished, and shall match TIOH Metal Finish Chip No. 7.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0083/021)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:39Z
Check the source to verify that this is the current version before use.