
MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, PLUG-RECEPTACLE-ADAPTER STYLE, FIXED SINGLE TERMINUS, THREADED, ADAPTER, BULKHEAD MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83522.

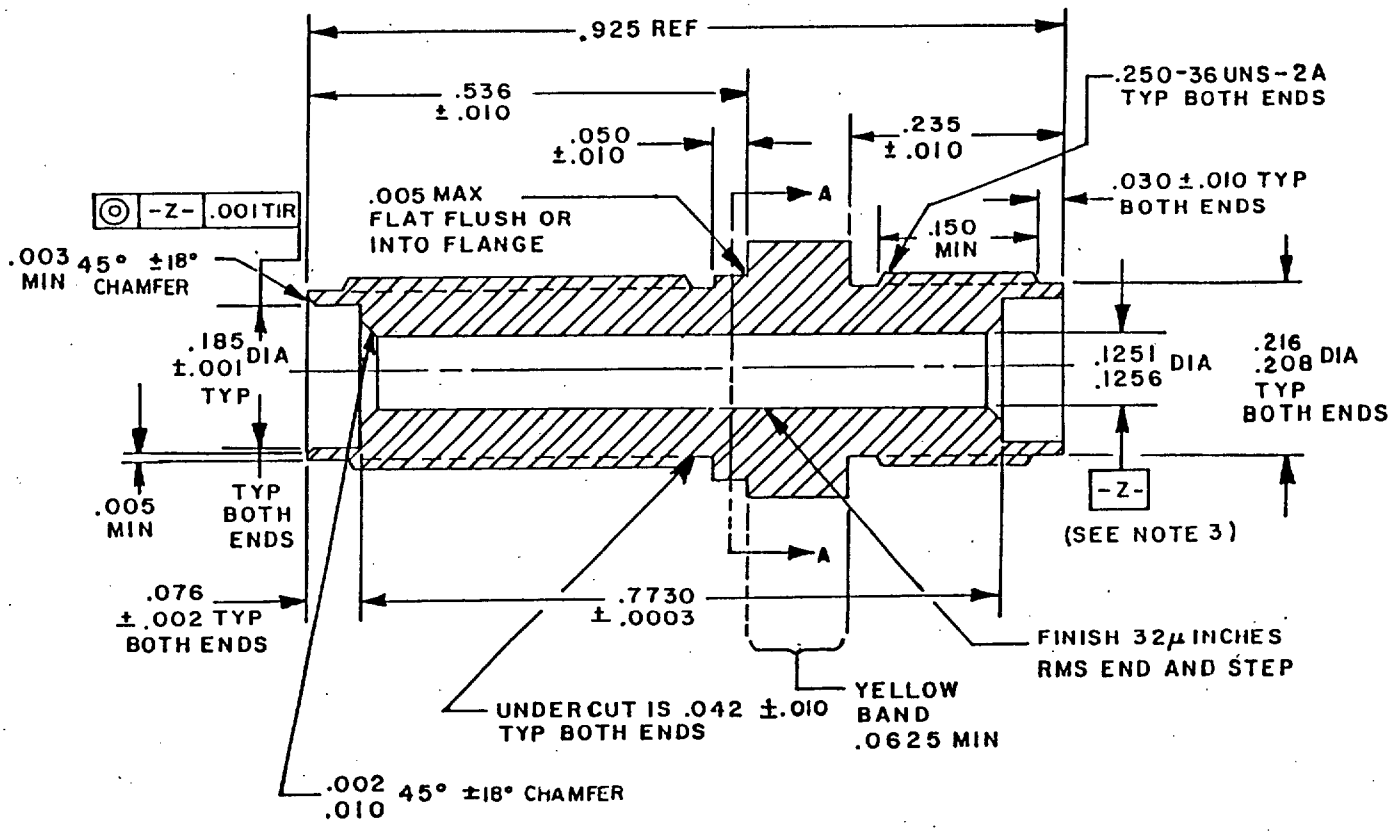


SECTION A

FIGURE 1. Dimensions and configuration.

Ⓑ denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

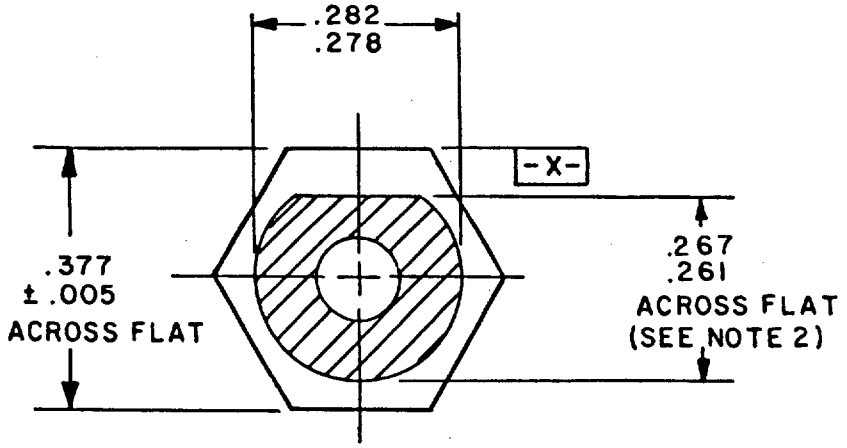

SECTION A-A

Inches	mm
.0003	0.008
.001	0.03
.002	0.05
.003	0.08
.005	0.13
.010	0.25
.030	0.76
.042	1.07
.050	1.27
.0625	1.59
.076	1.93
.1251	3.178
.1256	3.190
.150	3.81
.185	4.70
.208	5.28
.216	5.49
.235	5.97
.250	6.35
.267	6.78
.278	7.06
.282	7.16
.377	9.58
.7730	19.634
.377	23.50

NOTES:
1. All dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All dimensions are after plating.
4. Flat to be within ±7° of surface -X-.
5. No burrs or nicks for entire length.
6. Three holes .016 (0.41 mm) minimum diameter, equally spaced, are required for safety wiring after mating. Location on the coupling nuts optional.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The adapter housing and other metal components shall be of corrosion resistant steel in accordance with QQ-S-763, class 303 or nickel plated brass in accordance with QQ-B-626.

Optical requirements:

Coupling loss (attenuation): 2 dB maximum per mated pair.

Weight: 6 grams maximum.

Safety wire holes: Required.

Force to engage and disengage:

Longitudinal force: 12 pounds maximum.

Ⓑ Torque: 4 inch-pounds maximum.

Ⓑ Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Military part number: M83522/3-02 with safety wire holes. (Superseded part number M83522/3-01 has been replaced by M83522/3-02.)

Adapter accessories: One internal tooth lockwasher .410 maximum by .018 inch thick, and one hex nut .3125 by .065 inch thick maximum and two protective dust-caps.

NOTE: The adapter mates with MIL-C-83522/1 plug, MIL-C-83522/2 plug, and MIL-C-83522/6 plug.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0063-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.