
INCH-POUND
MIL-C-83522/3E
30 December 1988
SUPERSEDING
MIL-C-83522/3D
28 September 1987

MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, FIBER OPTIC, BULKHEAD MOUNT, FOR SINGLE FIBER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83522.

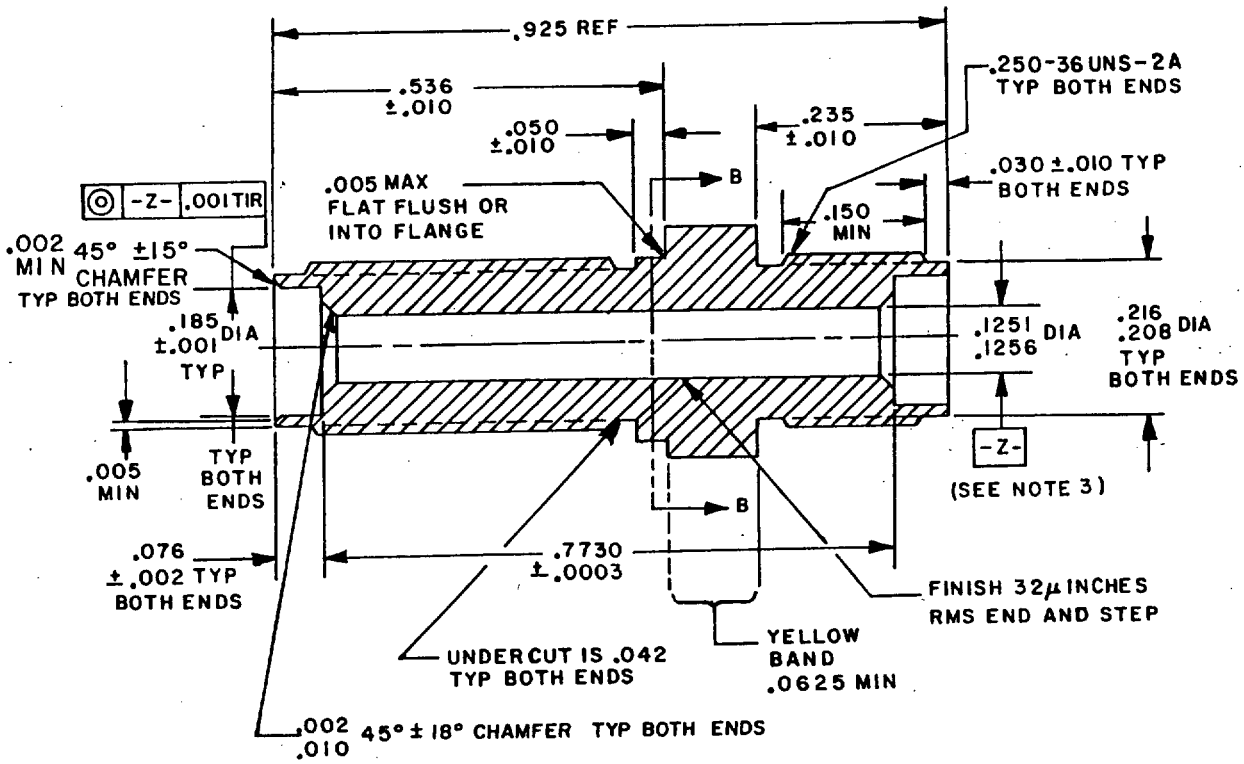


SECTION A-A

FIGURE 1. Dimensions and configuration.

FSC 6060
AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

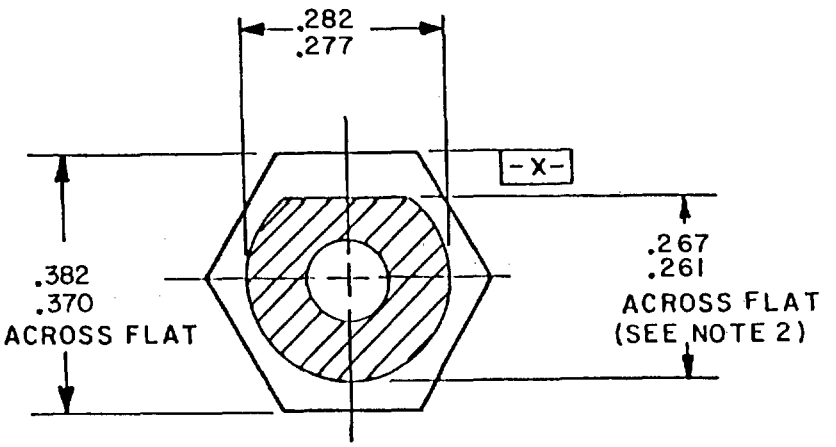

SECTION B-B

Inches	mm	Inches	mm
.0003	0.008	.185	4.70
.001	0.03	.208	5.28
.002	0.05	.216	5.49
.005	0.13	.235	5.97
.010	0.25	.250	6.35
.030	0.76	.261	6.63
.042	1.07	.267	6.78
.050	1.27	.277	7.04
.0625	1.588	.282	7.16
.076	1.93	.370	9.40
.1251	3.178	.382	9.70
.1256	3.190	.536	13.61
.150	3.81	.7730	19.634
		.925	23.50

NOTES:
1. All dimensions are after plating.
2. Flat to be within ±7° of surface |-x-|
3. No burrs or nicks for entire length.
4. Dimensions are in inches.
5. Metric equivalents are given for general information only.
6. Three holes .016 (0.41 mm) minimum diameter, equally spaced, are required for safety wiring after mating. Location on the coupling nuts optional.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The adapter housing and other metal components shall be of corrosion resistant steel per QQ-S-763, class 303 or nickel plated brass per QQ-B-626.

Optical requirements:

Coupling loss (attenuation): 3 dB maximum per mated pair.

Weight: 6 grams maximum.

Safety wire holes: Required.

Force to engage and disengage:

Longitudinal force: 12 pounds maximum.

Torque: 4 inch-pounds maximum.

Coupling proof torque: 5 inch-pounds minimum.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Part or Identifying Number: M83522/3-02 with safety wire holes. (Superseded part number M83522/3-01 has been replaced by M83522/3-02.)

Adapter accessories: One internal tooth lockwasher .410 maximum by .018 inch thick, and one hex nut .3125 by .065 inch thick maximum and two protective dust-caps.

NOTE: The adapter mates with MIL-C-83522/1 plug, MIL-C-83522/2 plug, and MIL-C-83522/6 plug.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Navy - SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0073-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.