MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, PLUG-RECEPTACLE-ADAPTER STYLE, FIXED SINGLE TERMINUS, THREADED, RECEPTACLE, LOW PROFILE PARALLEL PC MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83522.


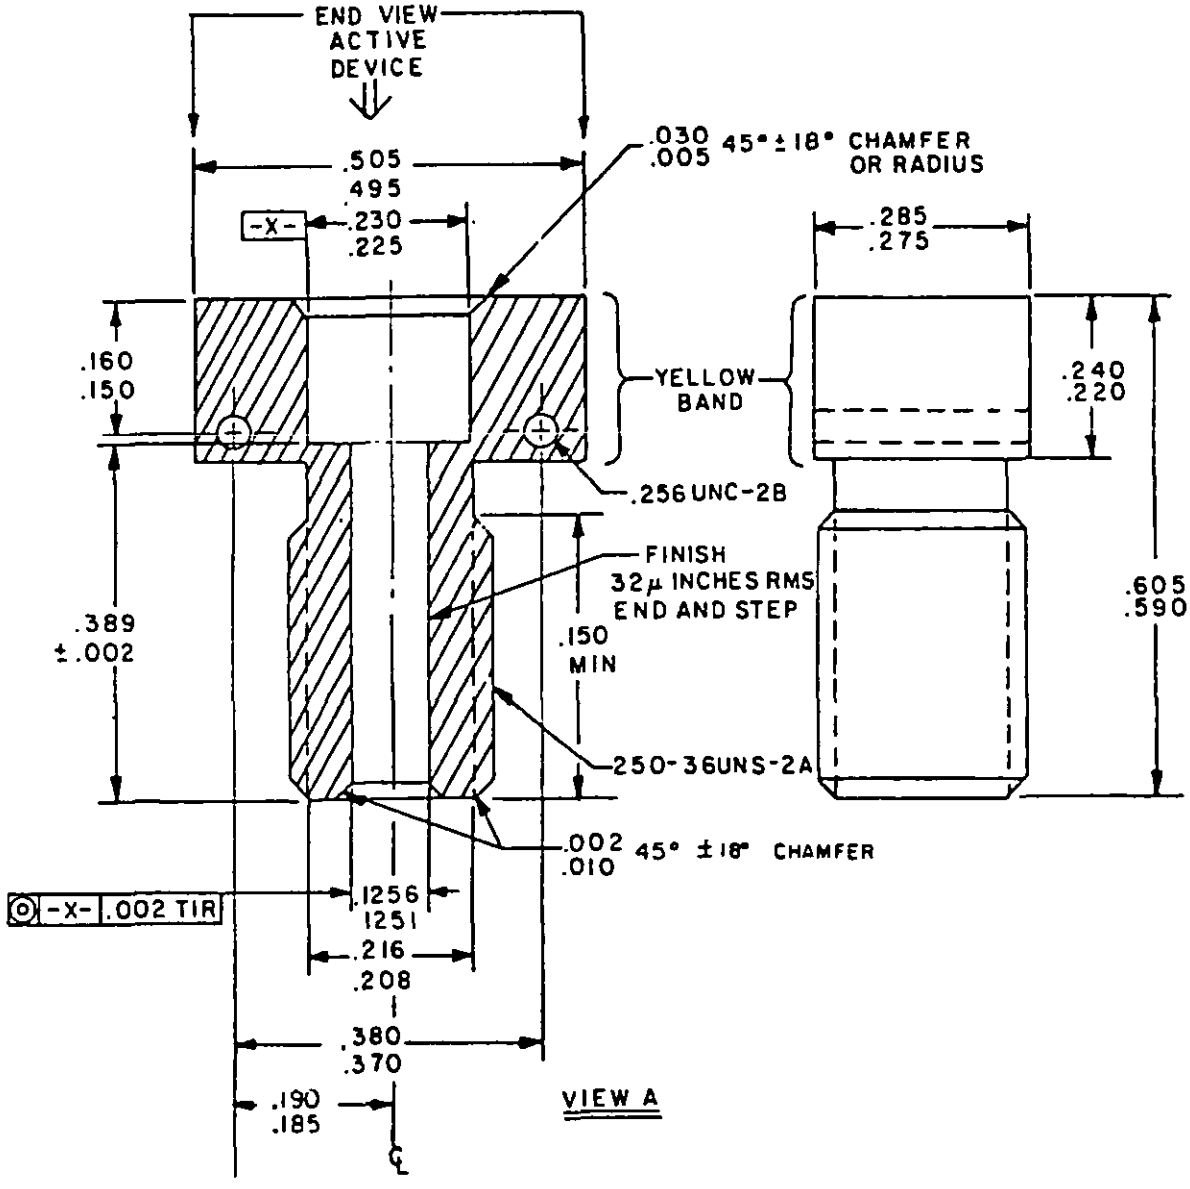


FIGURE 1. Dimensions and configuration.

Ⓓ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

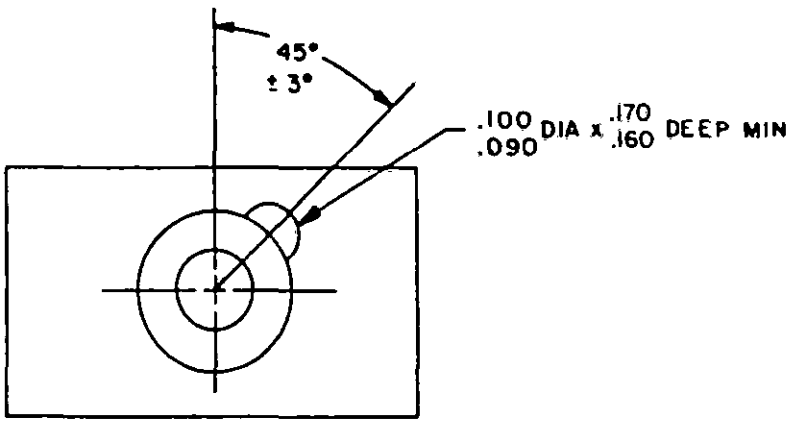

END VIEW

ACTIVE DEVICE POLARIZATION

Inches	mm	Inches	mm	Inches	mm
.000032	0.00081	.160	4.05	.256	6.50
.002	0.05	.170	4.32	.275	6.99
.005	0.13	.185	4.70	.285	7.24
.010	0.25	.195	4.95	.370	9.40
.030	0.76	.208	5.28	.380	9.65
.090	0.03	.216	5.49	.389	9.88
.100	2.54	.220	5.59	.495	12.57
.1251	3.178	.225	5.72	.505	12.83
.1256	3.190	.230	5.84	.590	14.00
.150	3.81	.240	6.10	.605	15.37
		.250	6.35		

NOTES:
1. All dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The receptacle housing and other metal components shall be of corrosion resistant steel in accordance with QQ-S-763, class 303 or nickel plated brass in accordance with QQ-B-626.

Weight: 5 grams maximum.

Safety wire holes: Not required.

Force to engage and disengage:

Longitudinal force: 12 pounds maximum.

(D) Torque: 4 inch-pounds maximum.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Military part number: M83522/4-01.

Receptacle accessories: 2 screws, 1 dustcover, TO can alignment sleeve(s), and one dust cover.

NOTES: The receptacle mates with MIL-C-83522/1 plug, MIL-C-83522/2 plug, and MIL-C-83522/6 plug.

The receptacle accepts TO can sizes 18, 46 and 52.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0063-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.