MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, PLUG-RECEPTACLE-ADAPTER STYLE, FIXED SINGLE TERMINUS, THREADED, RECEPTACLE, PARALLEL P. C. MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83522.


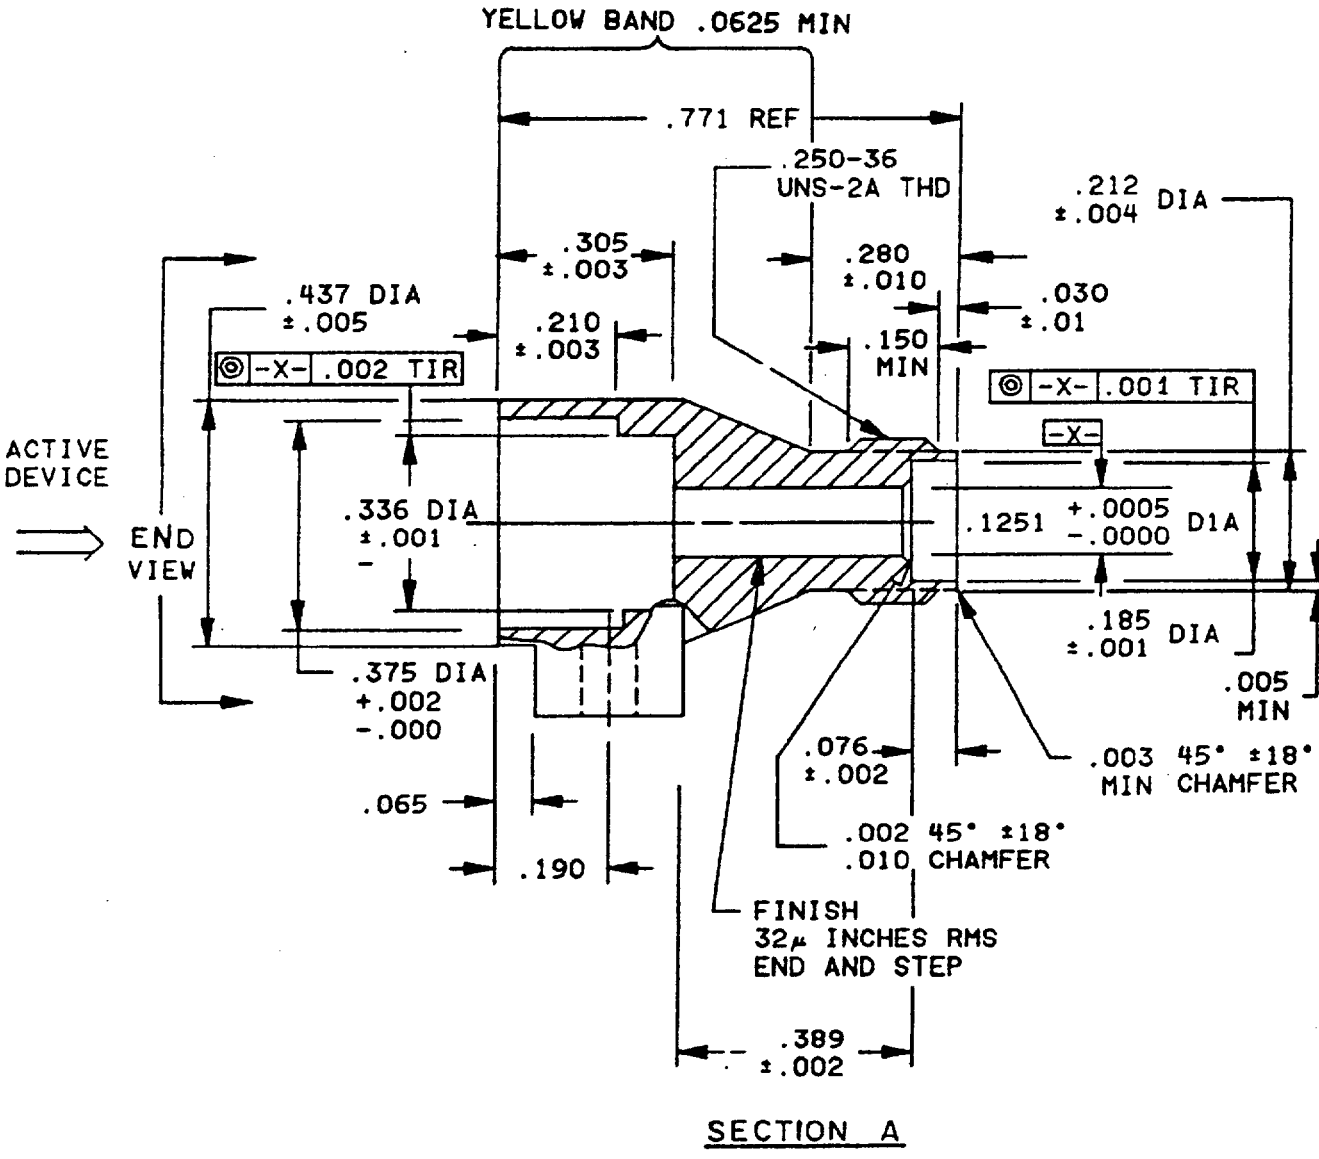


FIGURE 1. Dimensions and configuration.

Ⓐ denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

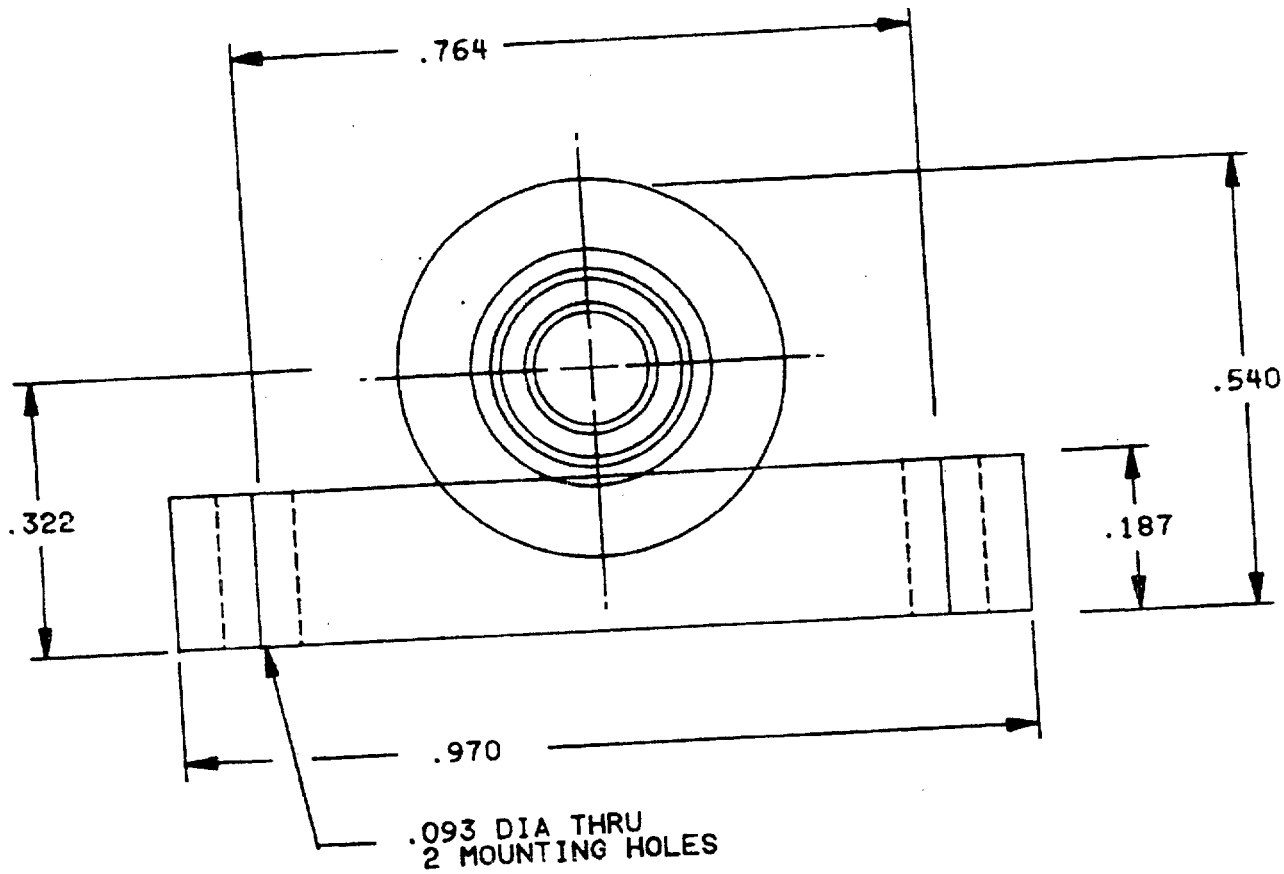

END VIEW

Inches	mm	Inches	mm
.0005	0.013	.185	4.70
.001	0.03	.190	4.83
.002	0.05	.212	5.38
.003	0.08	.250	6.35
.005	0.13	.280	7.11
.01	0.3	.305	7.75
.010	0.25	.320	8.13
.030	0.76	.322	8.18
.065	1.658	.375	9.53
.076	1.930	.389	9.88
.093	2.36	.437	11.10
.1251	3.178	.540	13.72
.150	3.81	.764	19.41
		.771	19.58
		.970	24.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) for three place decimals.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The receptacle housing and other metal components shall be of corrosion resistant steel in accordance with QQ-S-763, class 303 or nickel plated brass in accordance with QQ-B-626.

Weight: 4 grams maximum.

Safety wire holes: Not required.

Force to engage and disengage:

Longitudinal force: 12 pounds maximum.

Ⓐ Torque: 4 inch-pounds maximum.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Military part number: MIL-C-83522/7-01.

Receptacle accessories: Receptacle accessories shall include two screws, one dust cover, and TO can alignment sleeve(s).

NOTES: The receptacle mates with MIL-C-83522/1 plug, MIL-C-83522/2 plug, and MIL-C-83522/6 plug.

The receptacle accepts TO can sizes 5, 18, 46, and 52.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 19, 70, 71, 80, 84, 90, 99
DLA - ES

User activities:
Navy - MC, OS, YD
Air Force - 13, 14, 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0063-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.