MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, PLUG-RECEPTACLE-ADAPTER STYLE, FIXED SINGLE TERMINUS, THREADED, RECEPTACLE, BULKHEAD, HEX NUT MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83522.


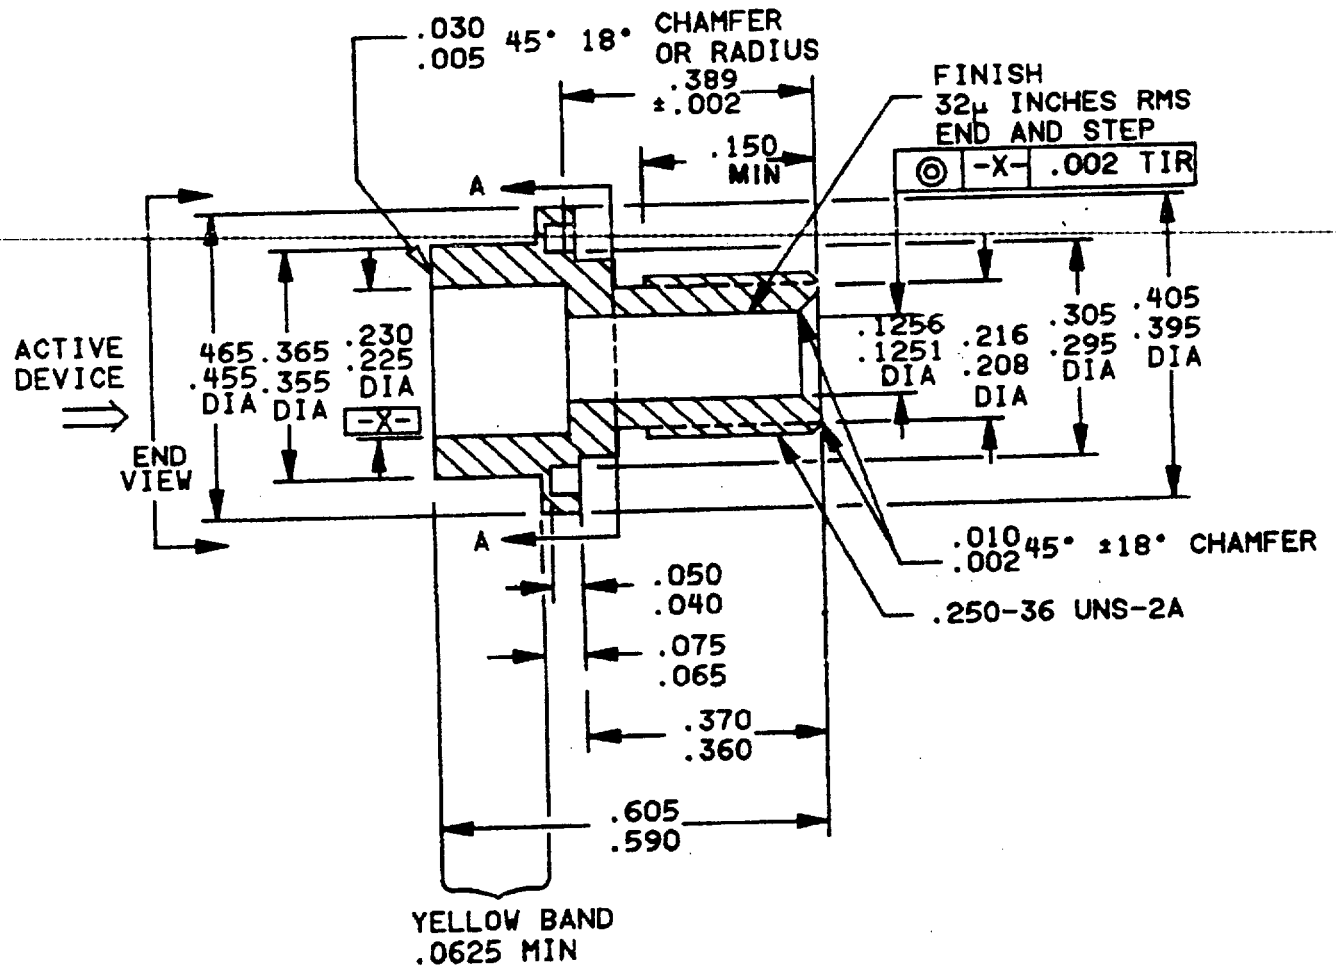


FIGURE 1. Dimensions and configuration.


Ⓐ denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

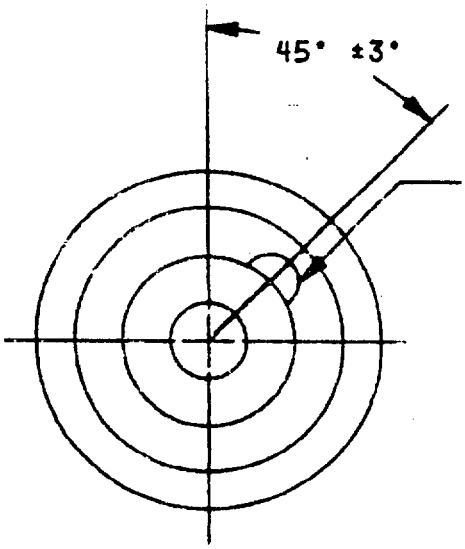

END VIEW

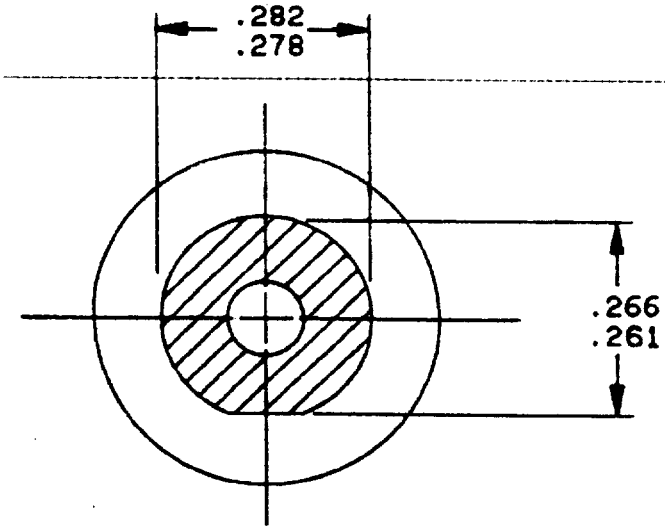

SECTION A-A

Inches	mm	Inches	mm
.002	0.05	.230	5.84
.005	0.13	.250	6.35
.010	0.25	.261	6.63
.030	0.76	.266	6.76
.040	1.02	.278	7.06
.050	1.27	.282	7.16
.0625	1.588	.295	7.49
.065	1.65	.305	7.75
.075	1.91	.355	9.02
.090	2.29	.360	9.14
.100	2.54	.366	9.27
.1251	3.178	.370	9.40
.1256	3.190	.389	9.88
.150	3.81	.395	10.03
.160	4.06	.405	10.29
~~.165~~	~~4.19~~	~~.466~~	~~11.56~~
.170	4.31	.465	11.81
.208	5.28	.590	14.99
.216	5.49	.605	15.37
.225	5.72		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) for three place decimals.
4. When applicable, three holes .016 (0.41 mm) minimum diameter, equally spaced, are required for safety wiring after mating. Location on the coupling nuts optional.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The receptacle housing and other metal components shall be of corrosion resistant steel in accordance with QQ-S-763, class 303 or nickel plated brass in accordance with QQ-B-626.

Weight: 5 grams maximum.

Safety wire holes: Not required.

Force to engage and disengage:

Longitudinal force: 12 pounds maximum.

(A) Torque: 4 inch-pounds maximum.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Military part number: MIL-C-83522/8-01.

Receptacle accessories: Receptacle accessories shall include one internal tooth lockwasher (.410 inch maximum by .018 inch thick); one hexnut (.3125 inch by .065 inch thick maximum); one plastic device ring (.229 inch diameter maximum by .085 inch thick maximum); one silicone o-ring (.301 inch inner diameter by .054 inch thick); and one dust cover.

NOTES: The receptacle mates with MIL-C-83522/1 plug, MIL-C-83522/2 plug, and MIL-C-83522/6 plug.

The receptacle accepts TO can sizes 18, 46, and 52.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 19, 70, 71, 80, 84, 90, 99
DLA - ES

User activities:
Navy - MC, OS, YD
Air Force - 13, 14, 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0063-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.