
SUPERSEDES
MIL-C-28876/24(NAVY)
29 August 1983

MILITARY SPECIFICATION SHEET


TOOLS, FIBER OPTIC, WRENCH AND ADAPTER, TORQUE, STRAIN RELIEF, TYPE V

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring fiber optic tools described herein shall consist of this specification and the latest issue of MIL-T-83523.

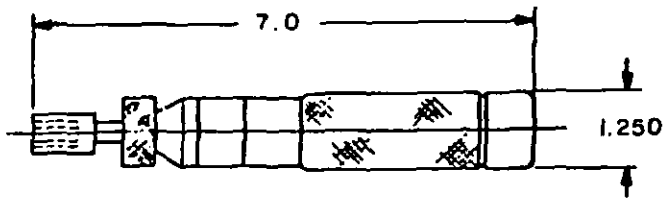


TORQUE WRENCH
FIGURE 1.

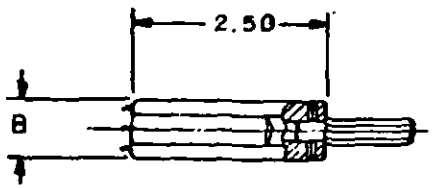

ADAPTOR
FIGURE 1A

INCHES	MM
1.250	31.75
2.50	63.5
6.0	152.4
7.0	177.8

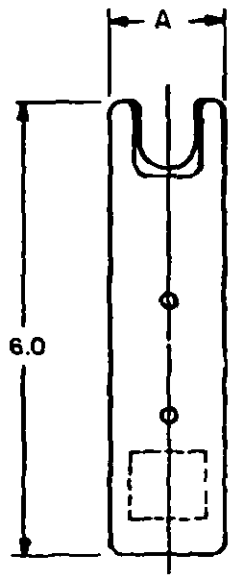

WRENCH HOLDER
FIGURE 1B

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals. Angles ±1°.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight:

Torque wrench adaptor: 2 ounces maximum.

Torque wrench holder: 4 ounces maximum.

Material:

Wrench: Aluminum alloy. Hardened to Brinell-95.

Hex shaft: Corrosion resistant steel. Hardened to 80-83B.

Handle: Steel.

Part number: See table I (all part numbers include an adapter and a wrench holder).

Application: This tool shall be used to assemble backshell strain reliefs specified in applicable military specifications.

TABLE I. Part numbers.

Part no.	Use	A	B
M83523/7-01	For 6 position hermaphroditic connectors. Torque wrench not applied.	1.25	1.00
M83523/7-02	For 2 and 4 position hermaphroditic connectors Torque wrench not supplied	1.50	.87
M83523/7-03	For 6 position hermaphroditic connectors. Torque wrench supplied	1.25	1.00
M83523/7-04	For 2 and 4 position hermaphroditic connectors. Torque wrench supplied.	1.50	.87
M83523/7A11	For MIL-C-28876, size 11 connectors. Torque wrench not supplied.	1.50	.50
M83523/7A13	For MIL-C-28876, size 13 connectors. Torque wrench not supplied.	1.50	.62
M83523/7A15	For MIL-C-28876, size 15 connectors. Torque wrench not supplied.	1.50	.75
M83523/7B11	For MIL-C-28876, size 11 connectors. Torque wrench supplied.	1.50	.50
M83523/7B13	For MIL-C-28876, size 13 connectors. Torque wrench supplied.	1.50	.62
M83523/7B15	For MIL-C-28876, size 15 connectors. Torque wrench supplied.	1.50	.75

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR AT, GL
Navy - SH, OS, AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5120-8042-7)

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 606-038/22982

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.