
MILITARY SPECIFICATION SHEET

INSIGNIA, SERVICE CAP, EP; AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-15665.

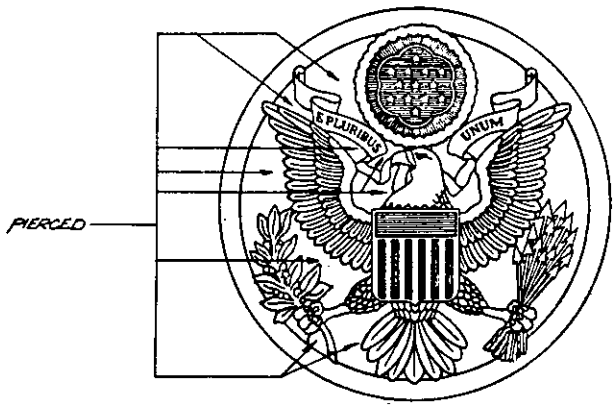

MATERIAL: NICKEL SILVER, RED BRASS OR ZINC ALUMINUM
DIMENSIONS (INCHES):
DIAMETER: 1-3/4 (REF)
THICKNESS (OUTSIDE EDGE): .070 ± .005

FINISH:
NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, OXIDIZED, RELIEVED, SATIN FINISH. THE REVERSE AND INNER AND OUTER SURFACES OF THE RING SHALL BE DARK GREY OR BLACK.

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE INSIGNIA SHALL BE SPHERICALLY DAPPED TO A DEPTH OF 1/8, +1/32, -0 INCH WHEN MEASURED FROM THE BACK OF THE RIM TO THE HIGH POINT OF THE OBVERSE.
2. A FULL FORCER MAY BE USED EXCEPT ON THE OUTER RING.
3. THE ATTACHING DEVICE SHALL BE A SCREW POST AND REGISTERING PRONG SOLDERED OR FUSED TO THE REVERSE OF THE INSIGNIA. THE SCREW POST SHALL BE LOCATED ON THE VERTICAL CENTERLINE AT THE TOP EDGE OF THE SHIELD AND THE REGISTERING PRONG LOCATED ON THE VERTICAL CENTERLINE AND THE CENTER OF THE GLORY.
4. THE SCREW POST SHALL BE 9/16 ± 1/32 INCH LONG, 1/8 INCH IN DIAMETER, AND SHALL HAVE A NO. 5-40UNC-2A THREAD.
5. THE THUMB NUT SHALL BE .625 ± .010 INCH IN DIAMETER AND SHALL HAVE A NO. 5-40UNC-2B THREAD.
6. THE REGISTERING PRONG SHALL BE PRONG AND CLUTCH TYPE. THE PRONG SHALL BE 1/4 ± 1/64 INCH IN LENGTH AND .045 ± .002 INCH IN DIAMETER.
7. IN ADDITION TO THE FINISH SPECIFIED THE ZINC ALUMINUM SHALL BE COPPER PLATED TO BEGIN THE FINISHING PROCESS.

Custodian:
Army - IH
Air Force - 11

Review activity:
Air Force - 82,99
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455 - 0269)

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:34Z
Check the source to verify that this is the current version before use.