NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/21H
27 June 1996
SUPERSEDING
MIL-I-15665/21G
29 October 1993

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE CAP, ENLISTED, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

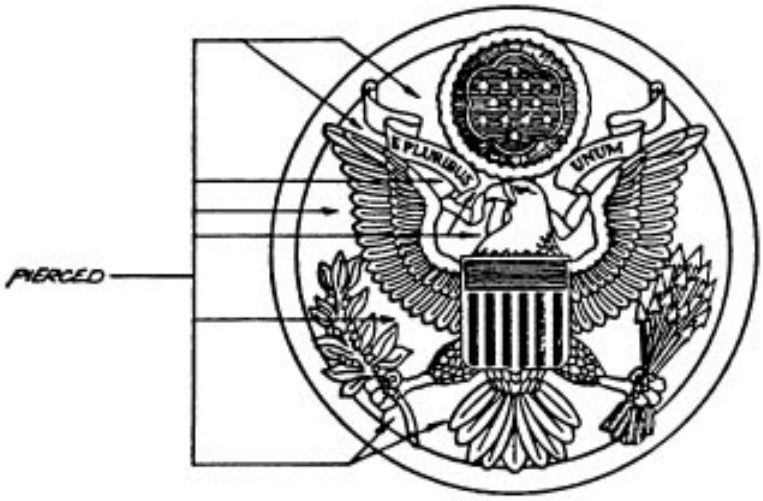

DASH NO.
-1: Male
-2: Female

MATERIAL: Nickel Silver, Red Brass or Zinc Aluminum

FINISH: Nickel Plated, Antiqued with Glossy Black Lacquer and Brightly Polished Highlights. The inner and outer surfaces of the ring shall be black.

DIMENSIONS:
DIAMETER: 1-3/4 inches (4.45 cm) (REF)
THICKNESS (Outside Edge): 0.070 inch ± 0.005 inch (0.178 cm ± 0.012 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. In addition to the finish specified, zinc aluminum shall be copper plated prior to beginning the finishing process.

3. A full forcer may be used except on the outer ring.

4. Pierced areas shall be as indicated. Only the left hand piercing is shown.

5. The insignia shall be spherically dapped to a depth of 1/8 inch + 1/32 inch - 0 (0.32 cm + 0.08 cm - 0) when measured from the back of the rim to the high point of the obverse.

6. The attaching device for Dash -1 shall be a screw post and registering prong soldered or fused to the reverse of the insignia. The screw post shall be located on the vertical center line at the top edge of the shield and the registering prong located on the vertical center line and the center of the glory.

7. The screw post for Dash -1 shall be 9/16 inch $\pm$ 1/32 inch (1.43 cm $\pm$ 0.08 cm) in diameter and shall have a No. 5-40 UNC-2A thread.

8. The thumb nut for Dash -1 shall be 0.625 inch $\pm$ 0.010 inch (1.578 cm $\pm$ 0.025 cm) in diameter and shall have a No. 5-40 UNC-2B thread.

9. The registering prong for Dash -1 shall be 1/4 $\pm$ 1/64 inch (0.64 cm $\pm$ 0.04 cm) length and 0.045 inch $\pm$ 0.010 inch (0.114 cm $\pm$ 0.005 cm) in diameter.

10. The attaching device for Dash -2 shall be prong and clutch type. The prongs shall be located at the intersection of the vertical center line of the insignia and 1/4 inch $\pm$ 1/6 inch (0.64 cm $\pm$ 0.16 cm) in from the rim edge.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 89, 99
DLA - CT

(Project No. 8455-0843)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.