NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/22E
27 June 1996
SUPERSEDING
MIL-I-15665/22D
29 October 1993

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE CAP, ENLISTED, MALE, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

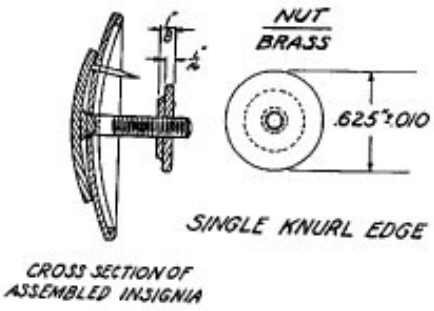

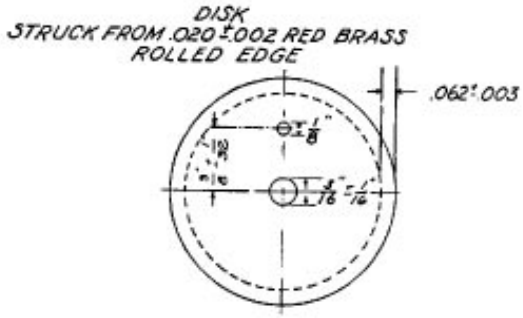

MATERIAL: Red Brass

FINISH:
DISC: Mirror-like Polished and shall match TIOH Metal Finish Chip Number 1.
COAT OF ARMS: Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 3.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DISC:
DIAMETER: 1-1/2 inches ± 1/32 inch (3.81 cm ± 0.08)
THICKNESS (At Center): 0.020 inch ± 0.002 inch (0.051 cm ± 0.005 cm)
COAT OF ARMS:
HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)
THICKNESS (Center of Shield): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the design on the coat of arms.

3. Pierced area shall be as indicated.

4. Pierced holes on the disc may be circular as shown or any polygon shape provided distance between opposite sides of the polygon are equal to diameter shown.

5. The disc shall be spherically dapped to a radius of 2-3/8 inches ± 1/8 inch (6.03 cm ± 0.32 cm).

6. The coat of arms shall be spherically dapped to a radius of 1-7/16 inches ± 1/16 inch (3.65 cm ± 0.16 cm).

7. The screw post shall be centered on the coat of arms and shall be 9/16 inch ± 1/32 inch (1.43 cm ± 0.08 cm) long with a No. 5-40 UNC-2A thread. The post shall be soldered or electronically fused to the coat of arms.

8. The thumb nut shall be 0.625 inch ± 1/64 inch (1.65 cm ± 0.04 cm) in diameter and shall have a No. 5-40 UNC-2A thread.

9. The registration prong, 0.032 inch ± 0.002 inch (0.812 cm ± 0.005 cm) in diameter and 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) in length, shall be soldered or electronically fused to the vertical center line of the coat of arms so it will fit into the hole in the disc and not interfere with the thumb nut when it is screwed down on the post.

10. Support bars between both the laurel leaves and wings and the arrow heads and wings shall be 1/32 inch + 1/64 inch - 0 (0.08 cm + 0.04 cm - 0) wide and 1/16 inch (0.16 cm) long (REF).

11. At the option of the manufacturer for commercial sale only, insignia may be manufactured using 22 karat gold plate with a mirror-like polished finish and nickel underplating which shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:

(Project No. 8455-0843)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.

DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.