NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/22J(IH)
10 June 2024
SUPERSEDING
MIL-DTL-15665/22H(IH)
8 August 2019

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE CAP, ENLISTED, MALE, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.



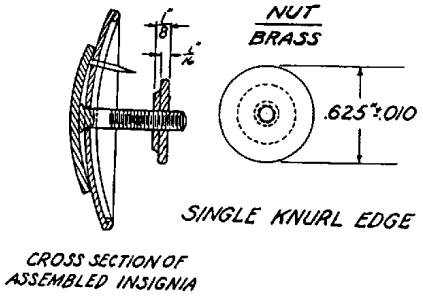

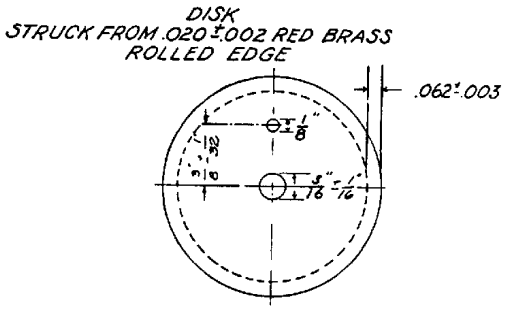

DASH NO.
-1: Service Cap, Enlisted, Male, Brass Polished
-2: Service Cap, Enlisted, Male, Brass Oxidized

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
DISC:
-1: Brass, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 1.
-2: Brass, Oxidized, Buffed Relieved and shall match TIOH Metal Finish Chip Number 4.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.

COAT OF ARM:
-1: Brass, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 3.
-2: Brass, Oxidized, Buffed Relieved and shall match TIOH Metal Finish Chip Number 4.

DIMENSIONS:
DISC:
DIAMETER: 1-1/2 inches (REF)
THICKNESS (At the center): 0.020 inch ± 0.002 inch
COAT OF ARMS:
HEIGHT: (Overall): 1-1/4 inches (REF)
THICKNESS (Center of the shield): 0.050 inch ± 0.005 inch

ATTACHING DEVICE:
1. The screw post shall be centered on the coat of arms and shall be 9/16 inch ± 1/32 inch long with a No. 5-40 UNC-2A thread. The post shall be soldered or electronically fused to the coat of arms.

2. The thumb nut shall be 0.625 inch ± 1/64 inch in diameter and shall have a No. 5-40 UNC-2A thread.

3. The registration prong, 0.032 inch ± 0.002 inch in diameter and 1/4 inch ± 1/64 inch in length, shall be soldered or electronically fused to the vertical center line of the coat of arms so it will fit into the hole in the disc and not interfere with the thumb nut when it is screwed down on the post.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. A full forcer may be used except on the outer ring.

3. Pierced areas shall be as indicated.

4. Pierced holes on the disc may be circular as shown or any polygon shape provided distance between opposite sides of the polygon are equal to diameter shown.

5. The disc shall be spherically dapped to a radius of 2-3/8 inches ± 1/8 inch.

6. The coat of arms shall be spherically dapped to a radius of 1-7/16 inches ± 1/16 inch.

7. Support bars between both the laurel leaves and wings and the arrow heads and wings shall be 1/32 inch + 1/64 inch - 0 (0.08 cm + 0.04 cm - 0) wide and 1/16 inch long (REF).

8. At the option of the manufacturer for commercial sale only, -1 insignia may be manufactured using 22 karat gold plate with a mirror-like polished finish and nickel underplating which shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-175)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:34Z
Check the source to verify that this is the current version before use.