UU-C-806H
April 30, 1973
SUPERSEDING
Fed. Spec. UU-C-806G
July 23, 1968

FEDERAL SPECIFICATION

CUPS, PAPER: LIDS, PAPER OR LIDS PLASTIC, DISPOSABLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers disposable, uncoated, wax-coated and plastic coated paper cups; paper disc and paper or plastic coverall lids (see 6.1).

1.1.1 Federal specification coverage. This specification does not include all types, classes, grades, and styles of cups that are commercially available, but is intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, styles and classes of cups. The paper cups covered by this specification shall be of the following types, styles of construction, classes of coatings, capacities (see table I), and forms, as specified (see 6.2, 6.3 and Appendix A):

Type I, Cups	-	Hot Drink.
Style A	-	Round, Two-piece.
Class 1	-	Uncoated (moisture resistant stock).
Class 3	-	Plastic Coated.
Form	-	With or without handles (6 and 8 ounce only).
Type II, Cups	-	Hot Food.
Style A	-	Round, Two-piece.
Class 1	-	Uncoated (moisture resistant stock).
Class 3	-	Plastic Coated.

FSC 7350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Type III, Cups	-	Cold Drink.
Style A	-	Round, Two-piece.
Class 2	-	Wax Coated.
Form	-	Sizes 10, 12, and 16 ounce available in either squat or tall shape.
Type IV, Cups	-	Cold Food, Light Duty (ice cream, cream or condiments).
Style A	-	Round, Two-piece.
Class 2	-	Wax Coated.
Style B	-	Pleated.
Class 2	-	Wax Coated.
Type V, Cups	-	Cold Food, Heavy Duty (cottage cheese).
Style A	-	Round, Two-piece.
Class 2	-	Wax Coated.
Type VI, Cups	-	Water.
Style A	-	Round, Two-piece.
Class 1	-	Uncoated (moisture resistant stock).
Class 2	-	Wax Coated.
Style B	-	Pleated.
Class 1	-	Uncoated (moisture resistant stock).
Class 2	-	Wax Coated.
Style C	-	Conical.
Class 1	-	Uncoated (moisture resistant stock).
Style E	-	Flat, Not Nested.
Class 1	-	Uncoated (moisture resistant stock).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Type VII, Cups - Portion Control.

Style B - Pleated.

Class 1 - Uncoated (moisture resistant stock).

Form - 1 ounce size available in either shallow or regular shape.

1.2.1.1 Capacities of cups. The capacities of the paper cups shall be as specified in tables I and II.

1.2.2 Types and styles of lids. The lids covered by this specification shall be of two types; type I, paper disc, or type II, coverall, either paper or plastic, as specified. The paper disc may or may not have a tab or a window. The paper or plastic coverall may be flush fill or insert, clear or opaque, and with or without a window (see 6.2).

Type I, (Lids) - Paper Disc.

Style A - No Tab.
Style B - External Tab.
Style C - Internal Tab.
Style D - Stitch Tab.
Style E - Window.

Type II, (Lids) - Paper or Plastic Coverall.

Style F - Paper, Insert.
Style G - Paper, Flush Fill, Solid.
Style H - Paper, Flush Fill, Window.
Style J - Plastic, Insert, Clear or Opaque.
Style K - Plastic, Flush Fill, Clear or Opaque.

1.2.3 For each type of cup, except VI and VII, specific styles of lids are available as follows and as specified in table I:

Types of Cups	Styles of Lids
Type I - Hot Drink	Styles B - Paper Disc, External Tab F - Paper Coverall, Insert J - Plastic Coverall, Insert, Clear or Opaque
Type II - Hot Food	Styles A - Paper Disc, No Tab B - Paper Disc, External Tab

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Types of Cups	Styles of Lids
Type II - Hot Food (cont'd)	Styles F - Paper Coverall, Insert G - Paper Coverall, Flush Fill, Solid H - Paper Coverall, Flush Fill, Window
Type III - Cold Drink	Styles B - Paper Disc, External Tab K - Plastic Coverall, Flush Fill, Clear or Opaque
Type IV - Cold Food, Light Duty	Styles B - Paper Disc, External Tab C - Paper Disc, Internal Tab E - Paper Disc, Window G - Paper Coverall, Flush Fill, Solid K - Plastic Coverall, Flush Fill, Clear or Opaque
Type V - Cold Food, Heavy Duty	Styles A - Paper Disc, No Tab B - Paper Disc, External Tab D - Paper Disc, Stitch Tab E - Paper Disc, Window F - Paper Coverall, Insert G - Paper Coverall, Flush Fill, Solid H - Paper Coverall, Flush Fill, Window J - Plastic Coverall, Insert, Clear or Opaque K - Plastic Coverall, Flush Fill, Clear or Opaque
Type VI - Water	Style - None
Type VII - Portion Control	Style - None

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Federal Specifications:

PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-B-1163	-	Box, Corrugated Fiberboard, High Compression Strength, Weather-Resistant, Wax-Resin Impregnated.
PPP-T-60	-	Tape: Packaging, Waterproof.

Federal Standards:

Fed. Std. No. 123	-	Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 224	-	Closing, Sealing and Reinforcing of Fiberboard, Shipping Containers, General Methods For.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from the established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Laws and Regulations:

21 CFR 121: Subpart F - Food Additives Resulting From Contact With Containers or Equipment and Food Additives Otherwise Affecting Food.

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Technical Association of the Pulp and Paper Industry (TAPPI) Standards

T 402 m-49 - Conditioning Paper and Paperboard for Testing.
T 411 os-44 - Thickness and Density of Paper.

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, 1 Dunwoody Park, Atlanta, GA 30341.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. The material used for the cups and lids as well as waxes and plastic materials used for surface treatment of the cups or lids shall conform to the requirements specified hereinafter, and shall be of suitable quality to produce the product in accordance with this specification. The cups shall be made from paper or paperboard. The lids shall be either paperboard, which may be white-lined on both sides or may be solid stock, or shall be plastic or any combination of paper and plastic, as specified (see 6.2). All cup, lid, and coating materials shall conform in all respects to the Code of Federal Regulations (CFR) and the Federal Register (FR), Subpart F of 21 CFR 121, as applicable. Cups and lids shall conform to 21 CFR 121.2526 for paper and paperboard in contact with aqueous and fatty foods. The use of reclaimed fiber for manufacturing the paper used in the cups and lids is encouraged. The reclaimed fiber shall conform to 21 CFR 121.2526.

3.2 Construction.

3.2.1 Cups. Cups shall conform with the requirements of table I when tested as specified in 4.3.2. The cups (see figs. 1, 2, 3 and 5) shall be round, nestable construction except type VI, style E, which shall be flat, not nested (rectangular). Flat cups (type VI, style E) shall be made of one piece of paper formed in a rectangular or tapered shape with gummed lip. Flat bottom one-piece, pleated cups (types IV, VI, and VII, style B shall be of one-piece construction with pleated side and reinforced or rolled top edge. The rolled or crimped top brim shall be sufficiently tight to prevent release of the pleats when filling or handling. Conical cups (type VI, style C) shall be made from a single sheet of paper formed into a conical shape, with a straight or rolled edge. Round two-piece cups (types I, II, III, IV, V, VI) or one-piece equivalent cups (type VI, style A) shall have smooth sidewalls with reinforced or rolled top edges and flat bottoms.

3.2.1.1 Types I and II, (Hot Drink and Hot Food) style A, classes 1 and 3 cups. Types I and II, style A, classes 1 and 3 cups shall be round, of two-piece construction, uncoated (class 1) or plastic coated (class 3), as specified (see 6.2).

3.2.1.2 Type III (Cold Drink) style A, class 2 cups. Type III, style A, class 2 cups shall be round, of two-piece construction and wax coated (class 2), as specified (see 6.2) (for shapes see fig. 1).

3.2.1.3 Type IV (Cold Food) light duty cups (ice cream, cream, or condiments), style A, class 2 and style B, class 2. Type IV, light duty cups (ice cream, cream, or condiments), style A, class 2 shall be round, of two-piece construction, wax coated (class 2) and style B, class 2, shall be pleated construction and wax coated (class 2) as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

3.2.1.4 Type V (Cold Food) heavy duty cups (cottage cheese), style A, class 2. Type V, heavy duty cups (cottage cheese) style A, class 2 shall be round, of two-piece construction, wax coated (class 2) as specified (see 6.2).

3.2.1.5 Type VI (Water cups), styles A and B, class 1 or 2, styles C, and E, class 1. Type VI, two piece, style A and pleated style B, class 1 or 2 cups shall be uncoated (class 1) or wax coated (class 2). Conical, style C, and flat, not nested style E shall be uncoated only (class 1), as specified (see 6.2).

3.2.1.6 Type VII, (Portion Control) style B, class 1. Type VII, style B, class 1 cups shall be pleated, uncoated (class 1), as specified (see 6.2) (for forms, see fig. 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE I. Cups

Style	Class	Capacity nominal	Required capacity 1/ minimum average	Minimum Thickness		Packaging	Packing	Styles and figures of lids available
				Wall	Bottom			
		Fluid ounces	Ounces	Inch	Inch	Unit	Shipping container	
Type I, Hot Drink								
A (Round, Two-piece)	1	6 2/	5-3/4	0.0135	0.0110	50	1000	Style B- Paper Disc fig. 7- External Tab
		8 2/	7-3/4	.0135	.0110	50	1000	Style F- Paper, Coverall fig. 11- Paper, Insert
		10	9-3/4	.0160	.0110	50	1000	Style J- Plastic Coverall fig. 14- Plastic, Insert Clear or Opaque
		12	11-3/4	.0160	.0110	50	1000	
		16	15-3/4	.0160	.0110	50	1000	Style B- Paper Disc fig. 7- External Tab Style F- Paper Coverall fig. 11- Paper, Insert
	3	5	4-3/4	.0120	.0090	50	1000	Style B- Paper Disc fig. 7- External Tab
		6	5-3/4	.0120	.0090	50	1000	
		8 2/	7-3/4	.0120	.0090	50	1000	Style F- Paper Coverall
Type II, Hot Food								
A (Round, Two-piece)	1	8	7-3/4	.0164	.0171	50	1000	Style A- Paper Disc fig. 6- No Tab
		10	9-3/4	.0170	.0171	50	500	Style B- Paper Disc Style F- Paper, Coverall fig. 11- Paper, Insert

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE I. Cups (con.)

Style	Class	Capacity nominal	Required capacity 1/ minimum average	Minimum thickness		Pack-aging	Packing	Styles and figures of lids available
				Wall	Bottom			
		Fluid ounces	Ounces	Inch	Inch	Unit	Shipping container	
Type II, Hot Food (con.)								
A (Round, Two-piece) (con.)		16	15-3/4	.0170	.0171	25/50	500	Style G- Paper Coverall fig. 12- Paper, Flush Fill, Solid
		32	31-3/4	.0170	.0189	25/50	500	Style H- Paper Coverall fig. 13- Paper, Flush Fill, Window
	3	8	7-3/4	.0146	.0162	50	1000	Style A- Paper Disc fig. 6- No Tab Style B- Paper Disc fig. 7- External Tab Style F- Paper Coverall fig. 11- Paper, Insert Style G- Paper Coverall fig. 12- Paper, Flush Fill, Solid
		32	31-3/4	.0192	.0189	50	500	Style H- Paper Coverall fig. 13- Paper, Flush Fill, Window

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE I. Cups (con.)

Style	Class	Capacity nominal	Required capacity 1/ minimum average	Minimum thickness		Pack-aging	Packing	Styles and figures of lids available
				Wall	Bottom			
		Fluid ounces	Ounces	Inch	Inch	Unit	Shipping container	
Type III, Cold Drink								
A (Round, Two-piece)	2	5	4-3/4	.0058	.0077	100	2500	Style B- Paper Disc fig. 7- External Tab
		6	5-3/4	.0068	.0077	100	2500	Style K- Plastic Coverall fig. 15- Plastic, Flush Fill, Clear or Opaque
		7	6-3/4	.0068	.0077	100	2500	Style K- Plastic Coverall fig. 15- Plastic, Flush Fill, Clear
		8	7-3/4	.0068	.0077	100	2500	Style B- Paper Disc fig. 7- External Tab Style K- Plastic Coverall fig. 15- Plastic, Flush Fill, Clear or Opaque
		9	8-3/4	.0068	.0077	100	2500	
		10 3/	9-3/4	.0068	.0077	100	2500	
		12 3/	11-3/4	.0077	.0077	50/100	2500	
		16 3/	15-3/4	.0099	.0085	50	1000	
Type IV, Cold Food								
A (Round, Two-piece)	2	1	3/4	.0058	.0068	100	5000	Style B- Paper Disc fig. 7- External Tab Style C- Paper Disc fig. 8- Internal Tab

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE I. Cups (con.)

Style	Class	Capacity nominal	Required capacity 1/ minimum average	Minimum thickness		Pack-aging	Packing	Styles and figures of lids available
				Wall	Bottom			
		Fluid ounces	Ounces	Inch	Inch	Unit	Shipping container	
Type IV, Cold Food (con.)								
A (Round, Two-piece) (cont'd)		4	3-3/4	.0074	.0084	50	2500	Style B- Paper Disc fig. 7- External Tab Style E- Paper Disc fig. 10- Window
		6	5-3/4	.0074	.0084	50	1000	Style B- Paper Disc fig. 7- External Tab Style E- Paper Disc fig. 10- Window Style G- Paper Coverall fig. 12- Paper, Flush Fill, Solid
		8	7-3/4	.0084	.0084	50	1000	Style K- Plastic, Coverall fig. 15- Plastic, Flush Fill, Clear or Opaque
B (Pleated)	2	4-1/4	4	--	.0045	100	2500	No lids
		6	5-3/4	--	.0045	250	5000	Style B- Paper Disc fig. 7- External Tab

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE I. Cups (con.)

Style	Class	Capacity nominal	Required capacity 1/ minimum average	Minimum thickness		Pack-aging	Packing	Styles and figures of lids available
				Wall	Bottom			
		Fluid ounces	Ounces	Inch	Inch	Unit	Shipping container	
Type V, Cold Food								
A (Round, Two-piece)	2	8	7-3/4	.0162	.0162	50	1000	Style A- Paper Disc fig. 6- No Tab Style B- Paper Disc fig. 7- External Tab Style D- Paper Disc fig. 9- Stitch Tab Style E- Paper Disc fig. 10- Window
		16	15-3/4	.0162	.0162	25/50	500	Style F- Paper Coverall fig. 11- Paper Insert
		32	31-3/4	.0169	.0179	25/50	500	Style G- Paper Coverall fig. 12- Paper, Flush Fill, Solid Style H- Paper Coverall fig. 13- Paper, Flush Fill, Window Style J- Plastic Coverall fig. 14- Plastic, Insert Clear or Opaque

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE I. Cups (con.)

Style	Class	Capacity nominal	Required capacity 1/ minimum average	Minimum thickness		Pack-aging	Packing	Style and figures of lids available
				Wall	Bottom			
		Fluid ounces	Ounces	Inch	Inch	Unit	Shipping container	
Type VI, Water								
A (Round, Two-piece)	1	4 6/	3-3/4	.0070	.0077	100	5000	No Lids
	2	4	3-3/4	.0058	.0077	100	5000	No Lids
B (Pleated)	1	3-1/4	3	--	.0044	100	5000	No Lids
	2	5	4-3/4	--	.0039	100	1000/2500 (see 6.5)	No Lids
C 4/ (Conical)	1	3-1/4	3	.0036	--	250	5000	No Lids
		3-1/2	3-1/4	.0036	--	250	5000	No Lids
		5-3/4	5-1/2	.0045	--	250	5000	No Lids
E (Flat not nested)	1	4	3-3/4	.0040	--	250	10000	No Lids
Type VII, Portion Control								
B (Pleated)	1	1 5/	1	--	.0040	250	5000	No Lids
		2	1-3/4	--	.0040	250	5000	No Lids
		4	3-3/4	--	.0045	250	5000	No Lids
		5-1/2	5-1/4	--	.0045	250	5000	No Lids

1/ See table V for metric equivalents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

2/ Handles available in these sizes only.

3/ Available in either squat or tall shape. When the overall height of a cup is less than two times the diameter of the base, it is squat. When the overall height of the cup is greater than two times the diameter of the base, it is tall. This applies to type III, cold drink cups only (see fig. 1, style A).

4/ Available with either straight or rolled edge (see fig. 3, style C).

5/ Available in either shallow or regular shape (see fig. 2, style B).

6/ May be furnished in two piece or one piece equivalent form(see fig. 1, style A).

3.2.2 Lids. The lids shall conform with the requirements of table II when tested as specified in 4.3.2. The lids shall be of two types; paper insert disc, type I (see figs. 6 thru 10), and paper or plastic coverall, type II (see figs. 11 thru 15) as specified (see 6.2). For information with regard to proper fit (see 6.3).

3.2.2.1 Type I, paper disc. Type I, paper disc shall be furnished without a tab (style A) or with a tab integral with the lid (styles B, C and E) or attached as a separate piece (style D). The disc lid may be furnished with or without a plastic window, as specified (see figs. 6 thru 10).

3.2.2.2 Type II, coverall, paper or plastic. Type II coverall lids, paper or plastic, shall have a skirt or flange which extends over the brim of the cup and the lid may (insert) or may not (flush fill) extend down inside the cup. Paper flush fill lids may be either solid (style G) or may have a plastic window, style H (see figs. 11 thru 13). Plastic coverall lids (styles J and K) may be either clear or opaque as specified (see figs. 14 and 15).

TABLE II. Lids

Style	Nominal capacity of cup	Thickness of lids minimum average	Packaging	Packing
	Fluid ounces	Inches	Unit	Shipping container
Type I, Paper Disc				
A No Tab (fig. 6)	8	0.040	100	1000
	10	.040	100	1000
	16	.040	100	1000
	32	.040	100	1000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE II. Lids (con.)

Style	Nominal capacity of cup	Thickness of lids minimum average	Packaging	Packing
	Fluid ounces	Inches	Unit	Shipping container
Type I, Paper Disc (con.)				
B External Tab (fig. 7)	1	.025	100	1000
Type I Cup, Hot Drink (fig. 1)	4	.025	100	1000
	5	.025	100	1000
Type III Cup, Cold Drink (fig. 1)	6	.025	100	1000
Type IV Cup, Cold Food, Light Duty (fig. 1)	7	.025	100	1000
	8	.025	100	1000
	9	.025	100	1000
	10	.025	100	1000
	12	.025	100	1000
	16	.025	100	1000
Type II Cup, Hot Food	8	.025	100	1000
Type V Cup, Cold Food Heavy Duty	10	.035	100	500
	16	.035	100	500
	32	.035	100	500
C Internal Tab (fig. 8)	1	.035	500	5000
D Stitch Tab (fig. 9)	8	.040	100	1000
	16	.040	100	1000
	32	.040	100	1000
E Window (Internal Tab) (fig. 10)	4	.040	100	1000
	6	.040	100	1000
	8	.040	100	1000
	16	.040	100	1000
	32	.040	100	1000
Type II, Paper or Plastic Coverall				
F Paper Insert (fig. 11)	5	.0155	50	1000
	6	.0155	50	1000
	8	.0155	50	1000
	10	.0175	50	1000
	12	.0175	50	1000
	16	.0175	50	1000
	32	.0190	50	1000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE II. Lids (con.)

Style	Nominal capacity of cup	Thickness of lids minimum average	Packaging	Packing
	Fluid ounces	Inches	Unit	Shipping container
Type II, Paper or Plastic Coverall (con.)				
G Paper Flush Fill Solid (fig. 12)	6	.020	50	1000
	8	.020	50	1000
	10	.020	50	1000
	16	.020	50	1000
	32	.020	50	1000
H Paper Flush Fill Window (fig. 13)	8	.015	50	1000
	10	.015	50	1000
	16	.015	50	1000
	32	.015	50	1000
J Plastic Insert (fig. 14)	6	.006	100	1000
	8	.006	100	1000
Type I Cup, Hot Drink (fig. 1)	10	.006	100	1000
	12	.006	100	1000
Type V Cup, Cold Food Heavy Duty (fig. 1)	5	.008	50	1000
	6	.008	50	1000
	8	.008	50	1000
	16	.008	50	1000
	32	.008	50	1000
K Plastic Flush Fill (fig. 15)	5	.006	100	2500
	6	.006	100	2500
Type III Cup, Cold Drink (fig. 1)	7	.006	100	2500
	8	.006	100	2500
	9	.006	100	2500
	10	.006	100	2500
	12	.006	100	1000/2500
	16	.006	100	1000
Type IV Cup, Cold Food Light Duty (fig. 1)	8	.006	100	1000
Type V Cup, Cold Food Heavy Duty (fig. 1)	8	.015	50	1000
	16	.015	50	1000
	32	.015	50	1000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

3.2.3 Handles. When specified (see 6.2), handles shall be paperboard and may be either integral with the cup or adhered to the cup. The handles shall be sufficiently strong, shall not tear, and if adhered to the cup, shall not separate when examined in accordance with 4.3.1.1.

3.2.4 Matching lids and cups. When specified (see 6.2 and 6.4), matching lids for specific types of cups shall be furnished as shown in figures 6 thru 15.

3.3 Thickness. The thickness of the cups and lids shall conform to the requirements of tables I and II when tested in accordance with 4.3.2.

3.4 Capacity. The capacity of the cups shall conform to the requirements of table I, when tested in accordance with 4.3.2.

3.5 Leakage. The cups shall be tested for evidence of leakage in accordance with 4.3.2.

3.6 Rigidity. The cups shall have sufficient rigidity so that they will not collapse when filling and handling or when tested in accordance with 4.3.2.

3.7 Odor and taste. The cups and lids shall not impart an objectionable odor or taste to the contents, when tested in accordance with 4.3.2.

3.8 Workmanship. The cups and lids shall be clean and free from foreign matter, holes, tears, lumps, or blisters. Lids shall fit snugly and the tabs of insert lids shall not break or separate from the lids when the tabs are used to move the lids.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items in order to determine the validity of the certification.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3 Inspection of the end item.

4.3.1 Examination of the end item. The end item shall be examined for defects in the applicable subparagraphs at the inspection levels and acceptable quality levels (AQLs) set forth in 4.3.1.4. Random samples shall be selected from each lot for examination of visual, dimensional, count, and preparation for delivery defects. The lot size for purposes of determining the sample size in accordance with MIL-STD-105 shall be expressed in units of intermediate packages of cups or lids, as applicable, of the specified quantities indicated in the applicable table for the specified type, style, class, capacity, and form for examinations under 4.3.1.1 and 4.3.1.2, and in units of shipping containers for examination under 4.3.1.3.

4.3.1.1 Examination of the end item for defects in appearance, construction, and workmanship. The sample unit for this examination shall be one cup or lid, as applicable.

TABLE III. Classification of defects

Examine	Defect
Cups	Not type, style, class, or form specified.
Appearance	Any disagreeable odor. Surface not clean; presence of any foreign matter, dirt, sand, grit, or glue spots. Any hole, tear, cut, puncture, wrinkle, crease, or fold that is not required by style of construction (such as pleated cups). Visibly and detrimentally out of round or misshaped. Top not sufficiently tight, allows pleats to open. Top brim not smooth, uniform, or sturdy.
Construction (where applicable)	Not capable of being nested. Does not have pleated side, reinforced, or rolled brim. Not one piece construction. Bottom not flat or recessed. Lid seat missing or does not encircle cup in its entirety. Not squat or tall, as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defect
Construction (where applicable) (con.)	Handle missing or damaged. Handle prohibits nesting or adheres to sidewall preventing forward folding. Handle tears or separates from sidewall when full cup is lifted by handle.
Workmanship (where applicable)	Poorly glued. Not waxed or plastic coated, as applicable. Torn, crushed, or distorted.
Lids	
Appearance	Not type and style specified.
Construction (as applicable)	Any disagreeable odor. Surface not clean; presence of any foreign matter, dirt, sand, grit, or glue spots. Any hole, tear, cut, puncture, wrinkle, crease, or fold that is not required by style of construction. Does not have tab or window. Skirt or flange does not extend down over the brim of the cup. Does not fit snugly with matching cup (see 6.3). Tab pulls loose or tears when lid is removed from matching cup.
Workmanship (as applicable)	Any hole, tear, cut, wrinkle, crease, or fold that is not required by style of construction. Not clean; presence of foreign matter. Torn, crushed, or distorted.

4.3.1.2 Examination of the end item for count of cups or lids, as applicable. The sample unit for this examination shall be one intermediate package of cups or lids, as applicable. The lot shall be unacceptable if the average count per package is less than specified in the appropriate table for the specified type, style, and capacity.

4.3.1.3 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing and marking complies with the section 5 requirements. Defects shall be scored in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

table IV. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE IV. Classification of preparation for delivery defects

Examine	Defect
Markings (exterior and interior)	Incorrect; incomplete; illegible; omitted; of improper size, location, sequence, or method of application.
Materials	Any nonconforming component; component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components such as: incomplete closure of container flaps, loose strapping, improper taping or inadequate stapling. Bulged or distorted container.
Contents	Number of cups and lids per package or shipping container is more or less than required.

4.3.1.4 Inspection levels and AQLs for examination. The inspection levels for determining the sample size and the AQLs expressed in defects per one hundred units shall be as follows:

Examination paragraph	Inspection levels	AQLs
4.3.1.1	S-4	2.5 1/
4.3.1.2	S-2	N.A.
4.3.1.3	S-2	2.5

1/ AQL expressed in defects per 100 cups or lids, as applicable.

4.3.2 Testing of the end item. The end item shall be tested for the applicable characteristics as indicated in table V for each lot of the same type, style, class, capacity, and form of cup or lid, as applicable. The methods of testing specified in the TAPPI Methods, where applicable, and as listed in table V, shall be followed except that the number of determinations to perform shall be as specified in table V. A sample unit shall consist of four cups or two lids, as applicable, of the same type, style, class, capacity and form. Nor more than one

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

sample unit randomly selected shall be drawn from any one shipping container. The same specimen shall be used for the capacity, rigidity, and taste tests. The lot size for the purpose of determining the sample size shall be expressed in units of 1000 cups or lids as applicable, of the same type, style, class, capacity, or form in the inspection lot. The inspection level shall be S-3 and the AQL shall be 2.5 percent defective for all tests except leakage. For the leakage test, 20 cups shall be drawn from each lot. Failure of 2 cups shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS FOR TESTING OF THE END ITEM

TABLE V

CHARACTERISTIC	Specification Reference		Requirements Applicable To		Number Determinations Per Unit	Results Reported As		Inspect Level	AQL
	Requirement	Test Method	Individ Unit	Lot Aver		Pass or Fail	Numerically to Nearest		
Cups									
Stock 2/	3.2.1								
Thickness:		4.4.1							
Wall	3.3	T 411 os-44 1/	X		2		0.0001 inch		
Bottom	3.3	T 411 os-44 1/	X		2		0.0001 inch		
Capacity	3.4	4.4.2	X		2		0.1 ounce		
Leakage	3.5	4.4.3	X		1 each on 20 cups	X			
Rigidity	3.6	4.4.4	X		1	X			
Odor and Taste	3.7	4.4.5	X		1	X			
Lids									
Stock 2/	3.2.2.2								
Thickness	3.3	4.4.1.2	X		2		0.0001 inch		

1/ Unless otherwise specified, all tests shall be conducted in accordance with TAPPI Method T 402 m-49.

2/ The supplier shall certify that the material (stock) conforms to the requirements of this specification.

23

AMXRE Form 598
8 February 1965

UU-C-806H

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

4.4 Test procedures.

4.4.1 Thickness.

4.4.1.1 Cups. For determining the thickness of the sidewall, cut two specimens approximately 2 inches square from the sidewalls of two of the cups constituting the sample unit and determine the thickness in accordance with the procedure of method T 411 os-44 of the TAPPI Methods. For the thickness of the cup bottom, trim away the sidewalls of two cups to produce a circle of material approximating the diameter of the cup bottom. Determine the thickness as described above. For one piece pleated cups, the thickness shall be determined on the bottom portion of the cup, after trimming away the sidewalls.

4.4.1.2 Lids. The thickness of the cup lid shall be determined in accordance with method T 411 os-44 of the TAPPI Methods on any portion of the largest flat surface but not on the window area of the window lids.

4.4.2 Capacity. The capacity of the paper cup shall be determined on two cups from each sample unit. Measure to the nearest milliliter the quantity of tapwater, at room temperature, required to fill the cup to the brim, of a flush fill cup, or bottom of a seated lid, as applicable. The average required capacity shall conform to the applicable requirements of 3.4. For this test, the cup shall rest on a smooth level surface. This test shall be performed on cups to be used for the leakage test.

4.4.3 Leakage.

4.4.3.1 Hot drink and hot food (types I, and II). Not less than 20 cups shall be filled with distilled water having a pouring temperature of 190° ± 10°F and placed on an irregular or ventilated surface. This permits air circulation under the recessed bottom and prevents the accumulation of moisture condensation which is not leakage. All the above types shall be examined for leakage at the end of 15 minutes.

4.4.3.2 Cold drink, cold food, water and portion control (types III through VII). The cups shall be filled with distilled water at a temperature range of 70° to 75°F. Place a sheet of clean, white bond paper between the cup and the supporting surface. All above types shall be examined for leakage at the end of 15 minutes except type VI, styles C and E (cone and flat cups) which shall be examined at the end of 5 minutes while suspended from the top.

4.4.4 Rigidity. The rigidity of the cups shall be determined on the filled cups used for the leakage test (see 4.4.3), at the end of the time specified for the leakage test. The rigidity shall be observed while holding the cup in the normal position for use (see 3.6). The cups shall not collapse when handled or when being filled for the leakage test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

4.4.5 Odor and taste. Approximately 60 milliliters distilled water used in the leakage test (4.4.3), shall be collected and allowed to stand in a stoppered flask or bottle for 2 hours. The odor and taste of the sample water shall be compared with that of freshly distilled water contained in a stoppered flask for the same length of time and at the same temperature (see 3.5).

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cups. Cups of the same type, style, class, capacity and form shall be packaged in a snug-fitting bleached kraft paper sleeve or bag, paperboard box, or plastic bag. The quantity of cups per package shall be as specified in table I.

5.1.1.2 Lids. Lids of the same type and style shall be packaged as specified in 5.1.1.1, except that the quantity shall be as specified in table II.

5.1.2 Level B (civil agencies). Cups and lids shall be packaged in accordance with the applicable requirements specified in 5.1.1.

5.1.3 Level C. Cups and lids shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Cups. Unless otherwise specified (see 5.2.1.4), cups, of the same type, style, class, capacity, and form, packaged as specified in 5.1 shall be packed in quantities as specified in table I, in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Each fiberboard container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636.

5.2.1.2 Lids. Lids of the same type and style, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except that the quantities shall be as specified in table II.

5.2.1.3 Combination pack. When specified (see 6.2 and 6.4), cups and lids, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

that cups and lids shall be packed in the same shipping container and quantities per container shall be as specified.

5.2.1.4 When specified (see 6.2), the fiberboard shipping container shall conform to style RSC of PPP-B-1163. The box shall be closed and waterproofed in accordance with method 101 of FED-STD-224, except the tape shall conform to type IV of PPP-T-60. The box shall be strapped in accordance with method 210 or 220 of FED-STD-224, except that flat strapping only shall be used.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1), cups and lids shall be packed as specified in 5.2.1.1, 5.2.1.2, or 5.2.1.3, as applicable, except that the shipping container shall conform to style RSC, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.2.3 Level C. Cups and lids, packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, all marking shall be in accordance with 5.3.1 or 5.3.2, as specified (see 6.2).

5.3.1 Civil agencies. All marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. All marking shall be in accordance with MIL-STD-129.

5.3.3 Special marking. Each interior package and shipping container for cups and lids, when packed separately, shall be marked with reference to the applicable cup or lid for which they are intended.

6. NOTES

6.1 Intended use. The paper cups and lids covered by this specification are intended to be used for the serving, dispensing or vending of hot or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

cold drinks or foods, drinking water, or for portioning, serving, or storing food products.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, style, class, capacity, and form of cup or lid required (see 1.2).
(c) Lids, either paperboard or plastic, clear or opaque as required (see 3.1 and 3.2).
(d) Handles when specified (see 3.2.3).
(e) Matching lids and cups, when specified (see 3.2.4 and 6.3).
(f) Selection of the applicable levels of packaging and packing required (see 5.1 and 5.2).
(g) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(h) When wax-resin impregnated fiberboard shipping containers are required (see 5.2.1.4).
(i) When cups and lids are to be packed in the same shipping container and the quantity thereof per package and pack (see 5.2.1.3, 5.2.2, and 6.4).
(j) Marking required (see 5.3).

6.3 Lids. In order to insure proper fit of lids, it is necessary that they be ordered from the manufacturer of the cups for which the lids are intended.

6.4 Combination pack. When the buying or ordering agency dictates the need for certain cups and matching lids to be packed together in the same shipping container, this requirement must be included in the ordering data (see 6.2). The type, style, and class, along with the type and style of matching lid, must be listed. The quantity of cups per unit box or bag, and the quantity of lids in separate unit boxes or bags, as well as the quantity of each per shipping container, must be specified. There is no standard commercial offering of a combination pack. Therefore, this special request must be clearly defined in every detail in order to minimize the extra cost involved and to expedite delivery.

6.5 Optional packing is not available because item will be supplied in the quantities listed according to the standard commercial practice of the individual supplier.

6.6 Supersession data. The following cups and lids have been deleted from this specification:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Cups

Type II, 12 ounce cups
Type III, 14, 20 and 24 ounce cups
Type IV, class 3 all capacities
Type IV, style B, 1, 4 and 8 ounce cups
Type V, style A, 12 ounce cup
Type V, class 3, all capacities
Type VI, style A, 3 and 5 ounce cups
Type VI, style B, 4 ounce cup
Type VI, style D, all capacities
Type VI, style E, 3 ounce cup
Type VII, 1/2 and 3-1/4 ounce cups
Types VIII and IX all cups

Lids

All style L lids

The capacity of the type VI, style C, 5-1/2 ounce cup is changed to 5-3/4 ounce capacity.

TABLE VI. Metric equivalents

Milliliter to ounces			Ounces to milliliters		
1 Milliliter	=	0.0338 ounces	1/8 ounce	=	3.70 milliliters
5 "	=	0.169 "	1/4 "	=	7.40 "
10 "	=	0.338 "	1/2 "	=	14.80 "
15 "	=	0.507 "	3/4 "	=	22.2 "
20 "	=	0.676 "	1 "	=	29.6 "
25 "	=	0.845 "	2 "	=	59.2 "
30 "	=	1.0140 "	3 "	=	88.8 "
35 "	=	1.183 "	4 "	=	111.4 "
40 "	=	1.352 "	5 "	=	148.0 "
45 "	=	1.521 "	6 "	=	177.6 "
50 "	=	1.690 "	7 "	=	207.2 "
100 "	=	3.380 "	8 "	=	236.8 "
150 "	=	5.070 "	9 "	=	266.4 "
200 "	=	6.676 "	10 "	=	296.0 "
300 "	=	10.140 "	11 "	=	325.6 "
400 "	=	13.352 "	12 "	=	355.2 "
500 "	=	16.900 "	13 "	=	384.8 "
600 "	=	20.280 "	14 "	=	414.4 "
700 "	=	23.492 "	15 "	=	444.0 "
800 "	=	26.708 "	16 "	=	473.6 "
900 "	=	30.420 "	31 "	=	917.6 "
1000 " (1 liter)	=	33.800 "	32 "	=	947.2 "

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MS

User activities:

Navy - CG, MC

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

GSA-FSS
HEW-NIH
VA-DMS

Project No. 7350-0150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

APPENDIX-A

TYPES, STYLES AND CLASSES OF CUPS

Types of End Use:

Type I	-	Hot Drink
Type II	-	Hot Food
Type III	-	Cold Drink
Type IV	-	Cold Food, Light Duty (Ice Cream, Cream, Condiments)
Type V	-	Cold Food, Heavy Duty (Cottage Cheese)
Type VI	-	Water
Type VII	-	Portion Control


Styles of Construction:

Style A	-	Two Piece
Style B	-	Pleated
Style C	-	Conical
Style E	-	Flat, Not Nested


Classes of Coatings:

Class 1	-	Uncoated (Moisture Resistant Stock)
Class 2	-	Waxed
Class 3	-	Plastic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

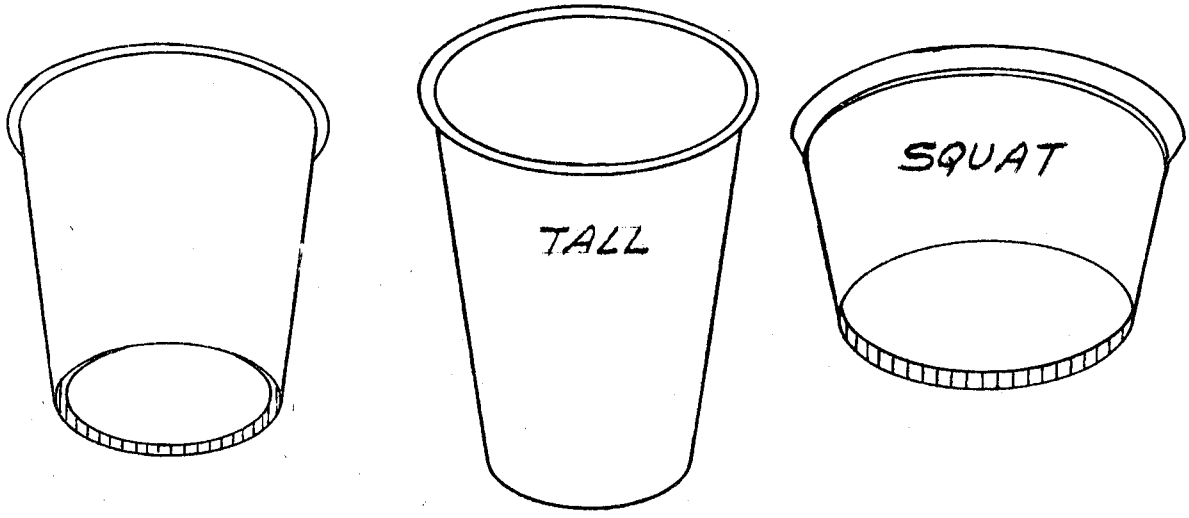

TYPES I, II, III, IV, V, VI, STYLE-A

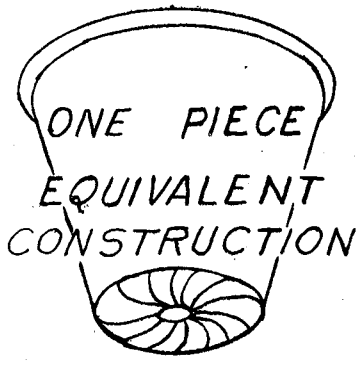



TYPE VI STYLE A
3, 4, AND 5 OUNCES ONLY

FIGURE 1 (CUPS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

PLEATED

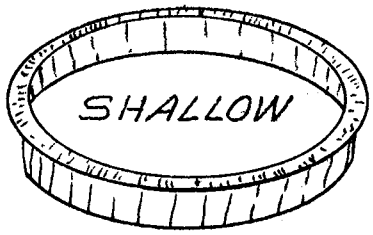




TYPES VI & VII STYLE-B


FIGURE 2 (CUPS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

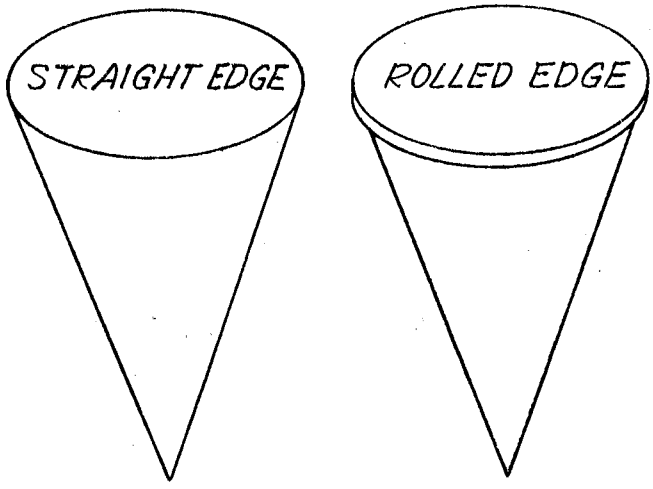

CONICAL CUPS
TYPE VI STYLE-C
FIGURE 3

FLAT, NOT NESTED

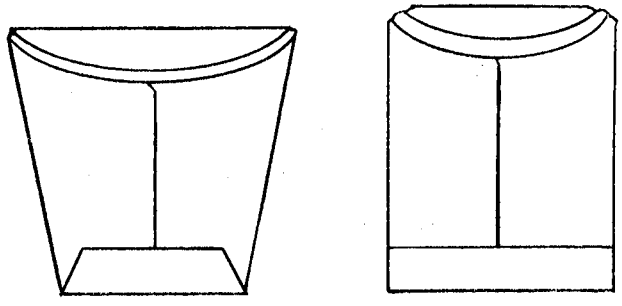


TYPE VI STYLE-E

FIGURE 5 (CUPS)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TYPE-1
PAPER DISC




STYLE-A

FIGURE 6 (LIDS)




STYLE-B

FIGURE 7 (LIDS)




STYLE-C

FIGURE 8 (LIDS)



STYLE-D

FIGURE 9 (LIDS)




STYLE-E


FIGURE 10 (LIDS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.


TYPE II
PAPER COVERALL

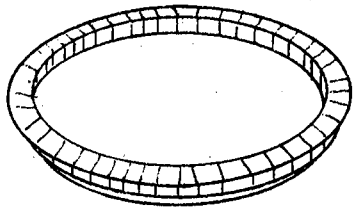

STYLE-F
FIGURE 11 (LIDS)

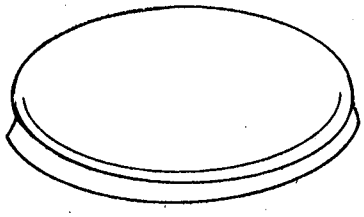


STYLE-G
FIGURE 12 (LIDS)




STYLE-H
FIGURE 13 (LIDS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

TYPE II
PLASTIC COVERALL

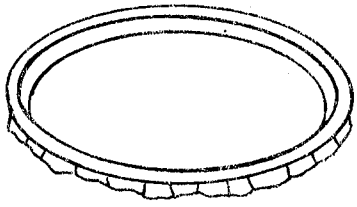

STYLE-J
FIGURE 14(LIDS)

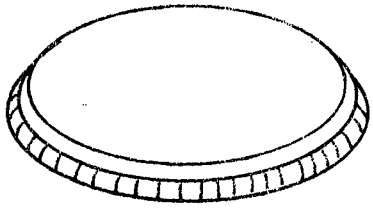

STYLE-K
FIGURE 15 (LIDS)

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents references herein. Price 40 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Cups, Paper: Lids, Paper Or Lids Plastic, Disposable UU-C-806H

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. ARMY NATICK LABORATORIES
NATICK, MASS. 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AMXRET-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S.MAIL

Commander
US Army Natick Laboratories
ATTN: AMXRET-EQS
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:21Z
Check the source to verify that this is the current version before use.