WW-P-541/1B
August 1, 1980
SUPERSEDING
Fed. Spec. WW-P-541/1A
October 12, 1971

FEDERAL SPECIFICATION SHEET

PLUMBING FIXTURES (WATER CLOSETS) (DETAIL SPECIFICATION)

This specification forms a part of the latest issue of Federal Specification WW-P-541/GEN)

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers specific requirements for water closets.

1.2 Classification.

1.2.1 Types. Water closets furnished under this specification sheet shall be of the types indicated in tables I and II.

1.2.2 Definitive part number (DPN). Water closets covered by this specification shall be identified by a DPN. This part number is intended for cataloging and ordering purposes; it is not intended for surface printing on the water closets. The DPN shall consist of the Federal specification symbol plus the specification part number (SPN) (see tables I and II). The DPN shall be written as indicated below (see 6.1 and 6.4).

DPN _____ WWP541/1 XXXXXXX

Specification sheet identification for fixture required. _____

SPN _____

FSC 4510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

TABLE I. Domestic water closet identification (100 series SPN).

Water closet types	SPN Bowl and tank	SPN Bowl only	SPN Tank only	SPN Bowl and insulated tank	SPN Insulated tank only
Bowl with floor outlet standard height (13-3/4 to 15 inches). Close-coupled tank. See figure 1					
Siphon-jet, regular bowl.	SJRB101	SJRB102	SJRB103	SJRB104	SJRB105
Siphon-jet, elongated bowl.	SJEB101	SJEB102	SJEB103	SJEB104	SJEB105
Reverse-trap, regular bowl.	RTRB101	RTRB102	RTRB103	RTRB104	RTRB105
Reverse-trap, elongated bowl.	RTEB101	RTEB102	RTEB103	RTEB104	RTEB105
Wash down, regular bowl.	WDRB101	WDRB102	WDRB103	WDRB104	WDRB105
Bowl with floor outlet, physically handicapped height (18 inches close-coupled tank. See figure 1					
Siphon-jet, regular bowl.	SJRB106	SJRB107	SJRB108	SJRB109	SJRB110
Siphon-jet, elongated bowl.	SJEB106	SJEB107	SJEB108	SJEB109	SJEB110
Bowl with floor outlet, juvenile height (13 to 13-1/2 inches) close-coupled tank. See figure 1					
Siphon jet, regular bowl.	SJRB111	SJRB112	SJRB113	SJRB114	SJRB115
Siphon jet, elongated bowl.	SJEB111	SJEB112	SJEB113	SJEB114	SJEB115
Bowl with floor outlet child height (10 inches) close-coupled tank. See figure 1					
Siphon jet, regular bowl.	SJRB116	SJRB117	SJRB118	SJRB119	SJRB120
Siphon jet, elongated bowl.	SJEB116	SJEB117	SJEB118	SJEB119	SJEB120
Bowl with floor outlet, standard height (13-3/4 to 15 inches) one-piece tank and bowl. See figure 2					
Siphon vortex regular bowl.	SVRB121				
Siphon vortex elongated bowl.	SVEB121				

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:23Z
Check the source to verify that this is the current version before use.

TABLE I. Domestic water closet identification (100 series SPN) cont'd.

Water closet types	SPN Bowl and tank	SPN Bowl only	SPN Tank only	SPN Bowl and insulated tank	SPN Insulated tank only
Bowl with wall outlet, standard height (13-3/4 to 15 inches) close-coupled tank. See figure 3					
Siphon-jet, wall hung, regular bowl.	SJRB126	SJRB127	SJRB128	SJRB129	SJRB130
Siphon-jet, wall hung, elongated bowl.	SJEB126	SJEB127	SJEB128	SJEB129	SJEB130
Bowl with wall outlet standard height (13-3/4 to 15 inches) close-coupled tank. See figure 4					
Siphon-jet, floor mounted, wall outlet, regular bowl.	SJRB131	SJRB132	SJRB133	SJRB134	SJRB135
Siphon-jet, floor mounted, wall outlet, elongated bowl.	SJEB131	SJEB132	SJEB133	SJEB134	SJEB135
Bowl with wall outlet, physically handicapped height (18 inches) close-coupled tank. See figure 4					
Siphon-jet, regular bowl Floor mounted, wall outlet.	SJRB136	SJRB137	SJRB138	SJRB139	SJRB140
Siphon-jet, elongated bowl floor mounted, wall outlet.	SJEB136	SJEB137	SJEB138	SJEB139	SJEB140

Table II. Office and industrial water closet identification (200 series SPN)

Water closet types	SPN
Bowl with floor outlet: or direct flushing valve (flushometer) standard height (13-3/4 to 15 inches). See figure 5	
Siphon-jet, regular bowl, top supply spud.	SJRB200
Siphon-jet, elongated bowl, top supply spud.	SJEB201

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

Table II. Office and industrial water closet identification (200 series SPN) cont'd.

Water closet types	SPN
Siphon-jet, regular bowl, back supply spud.	SJRB202
Siphon-jet, elongated bowl, back supply spud.	SJEB203
Reverse-trap, regular bowl, top supply spud.	RTRB204
Reverse-trap, elongated bowl, top supply spud.	RTEB205
Reverse-trap, regular bowl, back supply spud.	RTRB206
Reverse-trap, elongated bowl, back supply spud.	RTEB207
Washdown, regular bowl, back supply spud.	WDRB208
Bowl with floor outlet for direct flushing valve, (flushometer) physically handicapped height (18 inches). See figure 5	
Siphon-jet, regular bowl, top supply spud.	SJRB212
Siphon-jet, elongated bowl, top supply spud.	SJEB213
Siphon-jet, regular bowl, back supply spud.	SJRB214
Siphon-jet, elongated bowl, back supply spud.	SJEB215
Bowl with floor outlet for direct flushing valve, (flushometer), juvenile height (13 to 13-1/2 inches). See figure 5	
Siphon jet, regular bowl, top supply spud.	SJRB216
Siphon-jet, elongated bowl, top supply spud.	SJEB217
Siphon-jet, regular bowl, back supply spud.	SJRB218
Siphon-jet, elongated bowl, back supply spud.	SJEB219

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

TABLE II. Office and industrial water closet identification (200 series SPN) - cont'd.

Water closet types	SPN
Bowl with floor outlet for direct flushing valve, (flushometer), child height (10 inches). See figure 5	
Siphon-jet, regular bowl, top supply spud.	SJRB220
Siphon-jet, elongated bowl, top supply spud.	SJEB221
Siphon-jet, regular bowl, back supply spud.	SJRB222
Siphon-jet, elongated bowl, back supply spud.	SJEB223
Bowl, wall hung, standard height (13-3/4 to 15 inches) for direct flushing valve (flushometer). See figure 6	
Siphon-jet, regular bowl, top supply spud.	SJRB224
Siphon-jet, elongated bowl, top supply spud.	SJEB225
Siphon-jet, regular bowl, back supply spud.	SJRB226
Siphon-jet, elongated bowl, back supply spud.	SJEB227
Blowout, regular bowl, top supply spud.	BORB228
Blowout, elongated bowl, top supply spud.	BOEB229
Blowout, regular bowl, back supply spud.	BORB230
Blowout, elongated bowl, back supply spud.	BOEB231
Bowl, floor mounted, wall outlet, for direct flushing valve, (flushometer) standard height (13-3/4 to 15 inches). See figure 7	
Siphon-jet, regular bowl, top supply spud.	SJRB232
Siphon-jet, elongated bowl, top supply spud.	SJEB233
Siphon-jet, regular bowl, back supply spud.	SJRB234
Siphon-jet, elongated bowl, back supply spud.	SJEB235

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Latest issue of WW-P-541/GEN and documents referenced therein.

3. REQUIREMENTS

3.1 Materials and components. Materials and components shall conform to ANSI A112.19.2, and the basic Specification WW-P-541/GEN.

3.2 Rough-in dimensions. Water closets shall be for a 12 inch rough-in dimension (see 6.3).

3.3 Color. Water closets shall be white in color (see 6.3).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection (see WW-P-541/GEN).

4.2 Quality conformance inspection (see WW-P-541/GEN).

5. PREPARATION FOR DELIVERY (see WW-P-541/GEN).

6. NOTES


6.1 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Definitive part number (see 1.2.2).

6.2 Figures. Figures contained herein are for the convenience of identification of water closets. They are not intended to preclude the purchase of water closets of similar design which are in accordance with the requirements of this specification. Purchasers requiring more detailed figures should consult the applicable ANSI standards.

6.3 Rough-in dimension and color. Standard rough-in dimension shall be 12 inches and standard colors shall be white. Rough-in dimensions and colors other than the standard shall be specified in contract document. Hue and color of water closets may vary from one manufacturer to another, purchasers should consult manufacturer's literature prior to placing orders for colored fixtures.

6.4 Example of DPN:

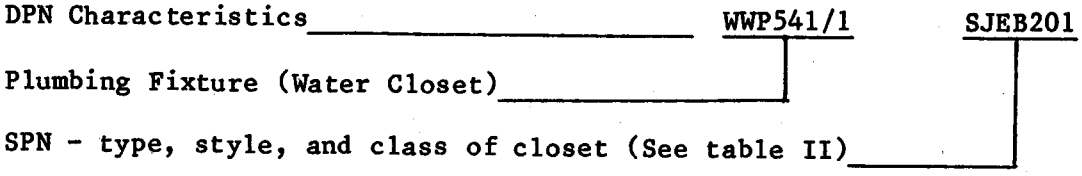

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - ME
Navy - YD
Air Force - 99

Review activity:

DLA - CS

User activities:

Army- CE
Navy - MC, MS

CIVIL AGENCY COORDINATING ACTIVITIES:

DOE - AEC
GSA - FSS
HUD - TCS

Preparing activity:

Navy - YD

Project No. 4510-0171-1

7

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

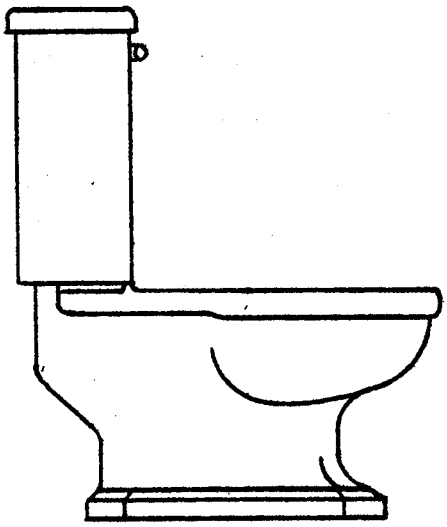


FIGURE 1.

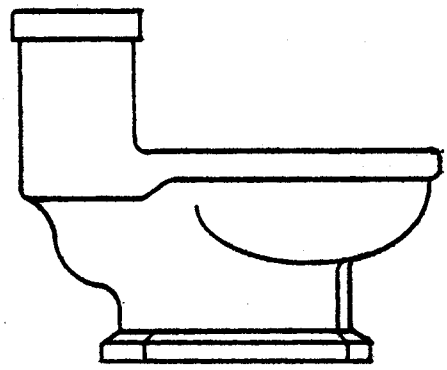


FIGURE 2.

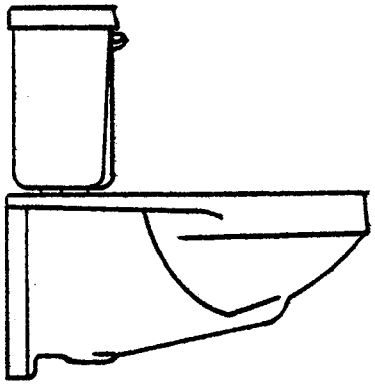


FIGURE 3.

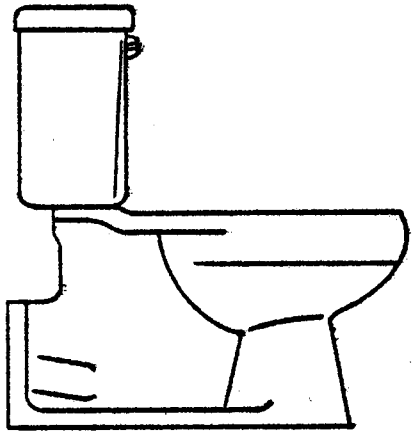


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

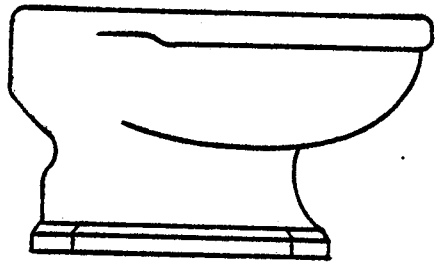


FIGURE 5.

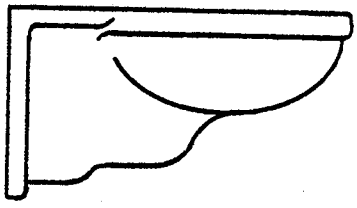


FIGURE 6.

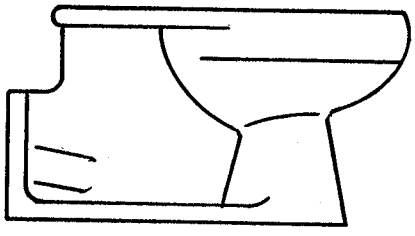


FIGURE 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.