INCH-POUND

MIL-DTL-8783/1
6 JULY 1998
SUPERSEDING
MS21920C
8 December 1975

DETAIL SPECIFICATION SHEET

CLAMP, HOSE, FLAT BAND 500 °F

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-8783.

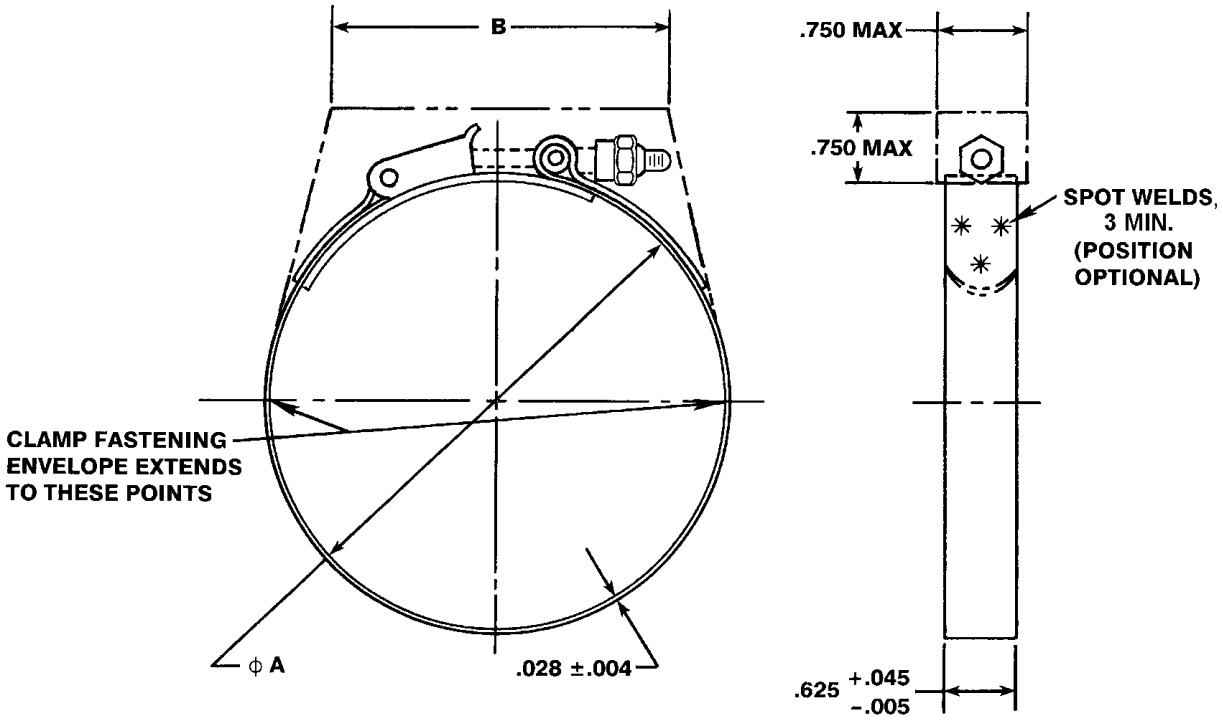


FIGURE 1. Hose clamp.



AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, active part numbers.

| Part No. | Part No. | A Inside Diametral Range | | B Maximum | | ADJM'T RANGE REF | WT LBS MAX QUICK RELEASE | WT LBS MAX T-BOLT |
|---|---|---|---|---|---|---|---|---|
| T-BOLT LATCH | QUICK RELEASE LATCH | EXT'D MIN | CPRS'D MAX | T-BOLT TYPE | QUICK RELEASE TYPE | | | |
| MS21920-20 | MS21920-20R | 2.50 | 2.25 | | | | .139 | .095 |
| MS21920-22 | MS21920-22R | 2.75 | 2.50 | | | | .143 | .099 |
| MS21920-24 | MS21920-24R | 3.00 | 2.75 | | | | .146 | .102 |
| MS21920-26 | MS21920-26R | 3.25 | 3.00 | | | .25 | .150 | .106 |
| MS21920-28 | MS21920-28R | 3.50 | 3.25 | | | | .153 | .109 |
| MS21920-30 | MS21920-30R | 3.75 | 3.50 | | | | .157 | .113 |
| MS21920-33 | MS21920-33R | 4.12 | 3.75 | | | | .164 | .120 |
| MS21920-35 | MS21920-35R | 4.38 | 4.00 | | | | .167 | .123 |
| MS21920-37 | MS21920-37R | 4.62 | 4.25 | | | | .171 | .127 |
| MS21920-39 | MS21920-39R | 4.88 | 4.50 | | | | .174 | .130 |
| MS21920-41 | MS21920-41R | 5.12 | 4.75 | 3.0 | | | .178 | .134 |
| MS21920-43 | MS21920-43R | 5.38 | 5.00 | | 3.4 | | .181 | .137 |
| MS21920-45 | MS21920-45R | 5.62 | 5.25 | | | | .185 | .141 |
| MS21920-47 | MS21920-47R | 5.88 | 5.50 | | | .38 | .188 | .144 |
| MS21920-49 | MS21920-49R | 6.12 | 5.75 | | | | .192 | .148 |
| MS21920-51 | MS21920-51R | 6.38 | 6.00 | | | | .195 | .151 |
| MS21920-53 | MS21920-53R | 6.62 | 6.25 | | | | .199 | .155 |
| MS21920-55 | MS21920-55R | 6.88 | 6.50 | | | | .202 | .158 |
| MS21920-57 | MS21920-57R | 7.12 | 6.75 | | | | .205 | .161 |
| MS21920-59 | MS21920-59R | 7.38 | 7.00 | | | | .209 | .165 |
| MS21920-61 | MS21920-61R | 7.62 | 7.25 | | | | .212 | .168 |
| MS21920-66 | MS21920-66R | 8.25 | 7.62 | | | | .227 | .188 |
| MS21920-70 | MS21920-70R | 8.75 | 8.12 | | | | .234 | .190 |
| MS21920-74 | MS21920-74R | 9.25 | 8.62 | 3.8 | 4.2 | .62 | .241 | .197 |
| MS21920-78 | MS21920-78R | 9.75 | 9.12 | | | | .248 | .204 |
| MS21920-80 | MS21920-80R | 10.00 | 9.38 | | | | .251 | .207 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions, inactive part numbers.

| T-BOLT LATCH | QUICK-RELEASE LATCH | A Inside Diametral Range | | B MAX | | ADJUSTMENT RANGE REF | WEIGHT POUNDS MAX |
|---|---|---|---|---|---|---|---|
| | | EXTENDED MIN | COMPRESSED MAX | T-BOLT TYPE | QUICK-RELEASE TYPE | | |
| MS21920-21 | MS21920-21R | 2.62 | 2.38 | 3.0 | 3.4 | .25 | .143 |
| MS21920-23 | MS21920-23R | 2.88 | 2.62 | | | | .146 |
| MS21920-25 | MS21920-25R | 3.12 | 2.88 | | | | .150 |
| MS21920-27 | MS21920-27R | 3.38 | 3.12 | | | | .153 |
| MS21920-29 | MS21920-29R | 3.62 | 3.38 | | | | .157 |
| MS21920-32 | MS21920-32R | 4.00 | 3.62 | | | .38 | .164 |
| MS21920-34 | MS21920-34R | 4.25 | 3.88 | | | | .167 |
| MS21920-36 | MS21920-36R | 4.50 | 4.12 | | | | .171 |
| MS21920-38 | MS21920-38R | 4.75 | 4.38 | | | | .174 |
| MS21920-40 | MS21920-40R | 5.00 | 4.62 | | | | .178 |
| MS21920-42 | MS21920-42R | 5.25 | 4.88 | | | | .181 |
| MS21920-44 | MS21920-44R | 5.50 | 5.12 | | | | .185 |
| MS21920-46 | MS21920-46R | 5.75 | 5.38 | | | | .188 |
| MS21920-48 | MS21920-48R | 6.00 | 5.62 | | | | .192 |
| MS21920-50 | MS21920-50R | 6.25 | 5.88 | | | | .195 |
| MS21920-52 | MS21920-52R | 6.50 | 6.12 | | | | .199 |
| MS21920-54 | MS21920-54R | 6.75 | 6.38 | | | | .202 |
| MS21920-56 | MS21920-56R | 7.00 | 6.62 | | | | .205 |
| MS21920-58 | MS21920-58R | 7.25 | 6.88 | | | | .209 |
| MS21920-60 | MS21920-60R | 7.50 | 7.12 | | | | .212 |
| MS21920-64 | MS21920-64R | 8.00 | 7.38 | 3.8 | 4.2 | .62 | .227 |
| MS21920-68 | MS21920-68R | 8.50 | 7.88 | | | | .234 |
| MS21920-72 | MS21920-72R | 9.00 | 8.38 | | | | .241 |
| MS21920-76 | MS21920-76R | 9.50 | 8.88 | | | | .248 |

Requirements:

1. The hose clamp shall be in accordance with figure 1 and tables I and II.
2. Material: See acquisition specification.
3. Finish: See acquisition specification.
4. Dimension B applies when the clamp is in the tightened condition at the maximum and minimum positions of its diametral range.
5. The T-bolt head/shank fillet radius shall be 0.030 inch minimum.
6. Remove all burrs and sharp edges.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.

Notes:

1. Dimensions in inches.

2. The illustration is for identification purposes only and is not intended to restrict designs and shapes of fastening devices, which conform to the requirements and are within the envelope dimensions.

## CONCLUDING MATERIAL

Custodians:
Air Force - 99
Army - AT

Preparing activity:
DLA - CC

(Project 4730-0860-01)

Review activities:
Air Force - 82
Army - AV, MI



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.