INCH-POUND


MIL-DTL-8783/1B
22 November 2022
SUPERSEDING
MIL-DTL-8783/1A
30 July 2008

DETAIL SPECIFICATION SHEET

CLAMP, HOSE, FLAT BAND 500 °F

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-8783.

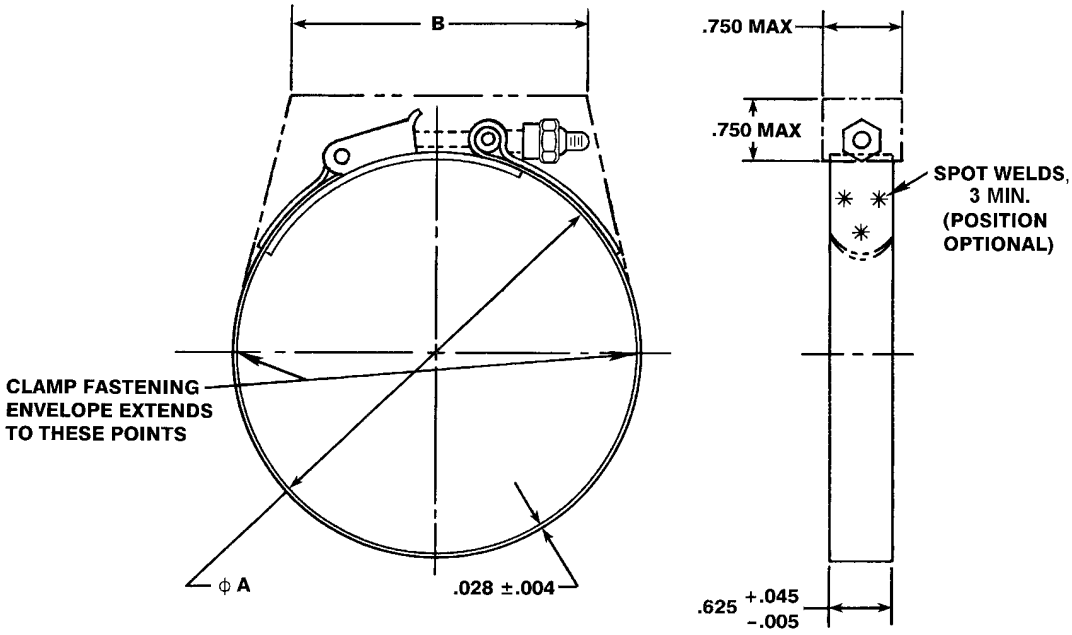

Inches	mm
.004	0.10
.005	0.13
.028	0.71
.045	1.14
.625	15.88
.750	19.05

NOTES:

1. Dimensions in inches, metric equivalents are given for information only.
2. The illustration is for identification purposes only and is not intended to restrict designs and shapes of fastening devices, which conform to the requirements and are within the envelope dimensions.

FIGURE 1. Hose clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for parts that are active for new design (new weapon systems only). 1/ 2/

T-bolt latch	Quick release latch	A Inside diametral range				B Maximum		Adjustment range T-bolt	Wt/lbs max
		Extended min		Compressed max		T-bolt type	Quick Release type		
		Inches	mm	Inches	mm				
MS21920-20	MS21920-20R	2.50	63.5	2.25	57.2				.140
MS21920-22	MS21920-22R	2.75	69.9	2.50	63.5				.144
MS21920-24	MS21920-24R	3.00	76.2	2.75	69.9				.149
MS21920-26	MS21920-26R	3.25	82.6	3.00	76.2			.25	.153
MS21920-28	MS21920-28R	3.50	88.9	3.25	82.6			(6.35)	.158
MS21920-30	MS21920-30R	3.75	95.3	3.50	88.9				.162
MS21920-33	MS21920-33R	4.12	104.6	3.75	95.3				.170
MS21920-35	MS21920-35R	4.38	111.3	4.00	101.6				.174
MS21920-37	MS21920-37R	4.62	117.3	4.25	108.0				.179
MS21920-39	MS21920-39R	4.88	124.0	4.50	114.3				.183
MS21920-41	MS21920-41R	5.12	130,0	4.75	120.7	3.0			.188
MS21920-43	MS21920-43R	5.38	136.7	5.00	127.0	(76.2)	3.4		.192
MS21920-45	MS21920-45R	5.62	142.7	5.25	133.4		(86.36)		.197
MS21920-47	MS21920-47R	5.88	149.4	5.50	139.7			.38	.201
MS21920-49	MS21920-49R	6.12	155.4	5.75	146.1			(9.65)	.206
MS21920-51	MS21920-51R	6.38	162.1	6.00	153.4				.210
MS21920-53	MS21920-53R	6.62	168.1	6.25	158.8				.215
MS21920-55	MS21920-55R	6.88	174.8	6.50	165.1				.219
MS21920-57	MS21920-57R	7.12	180.8	6.75	171.5				.224
MS21920-59	MS21920-59R	7.38	187.5	7.00	177.8				.228
MS21920-61	MS21920-61R	7.62	193.5	7.25	184.2				.233
MS21920-66	MS21920-66R	8.25	209.5	7.62	193.5				.254
MS21920-70	MS21920-70R	8.75	222.3	8.12	206.2				.263
MS21920-74	MS21920-74R	9.25	235.0	8.62	218.9	3.8	4.2	.62	.272
MS21920-78	MS21920-78R	9.75	246.4	9.12	231.6	(96.52)	(106.68)	(15.75)	.281
MS21920-80	MS21920-80R	10.00	254.0	9.38	238.3				.290

1/ Dimensions are in inches.
2/ Metric equivalents are given for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions, for parts that are Inactive for new design (replacement parts only). 1/ 2/

T-bolt latch	Quick release latch	A Inside diametral range				B Maximum		Adjustment range ref	Wt/lbs max
		Extended min		Compressed max		T-bolt type	Quick-release type		
		Inches	mm	Inches	mm				
MS21920-21	MS21920-21R	2.62	66.5	2.38	60.5				.142
MS21920-23	MS21920-23R	2.88	73.2	2.62	66.5				.146
MS21920-25	MS21920-25R	3.12	79.2	2.88	73.2			.25	.151
MS21920-27	MS21920-27R	3.38	85.9	3.12	79.2			(6.35)	.155
MS21920-29	MS21920-29R	3.62	91.9	3.38	85.9				.159
MS21920-32	MS21920-32R	4.00	101.6	3.62	91.9				.167
MS21920-34	MS21920-34R	4.25	108.0	3.88	98.6				.171
MS21920-36	MS21920-36R	4.50	114.3	4.12	104.6				.176
MS21920-38	MS21920-38R	4.75	120.7	4.38	111.3	3.0			.180
MS21920-40	MS21920-40R	5.00	127.0	4.62	117.3	(76.2)	3.4		.185
MS21920-42	MS21920-42R	5.25	133.4	4.88	124.0		(86.36)		.189
MS21920-44	MS21920-44R	5.50	139.7	5.12	130.0			.38	.193
MS21920-46	MS21920-46R	5.75	146.1	5.38	136.7			(9.65)	.198
MS21920-48	MS21920-48R	6.00	152.4	5.62	142.7				.202
MS21920-50	MS21920-50R	6.25	158.8	5.88	149.4				.207
MS21920-52	MS21920-52R	6.50	165.1	6.12	155.4				.211
MS21920-54	MS21920-54R	6.75	171.5	6.38	162.1				.216
MS21920-56	MS21920-56R	7.00	177.8	6.62	168.1				.220
MS21920-58	MS21920-58R	7.25	184.2	6.88	174.8				.225
MS21920-60	MS21920-60R	7.50	190.5	7.12	180.8				.229
MS21920-64	MS21920-64R	8.00	203.2	7.38	187.5				.248
MS21920-68	MS21920-68R	8.50	215.9	7.88	200.2	3.8	4.2	.62	.257
MS21920-72	MS21920-72R	9.00	228.6	8.38	212.9	(96.52)	(106.68)	(15.75)	.266
MS21920-76	*MS21920-76R*	*9.50*	*241.3*	*8.88*	*225.6*				.275

1/ Dimensions are in inches.
2/ Metric equivalents are given for information only.

REQUIREMENTS:

The hose clamp shall be specified on figure 1 and in tables I and II.
Material: See acquisition specification.
Finish: See acquisition specification.
Dimension B applies when the clamp is in the tightened condition at the maximum and minimum positions of its diametral range.
The T-bolt head/shank fillet radius shall be 0.030 inch minimum.
Remove all burrs and sharp edges.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced document. This document references MIL-DTL-8783.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - AS
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2022-038)

Review activities:
Army - AT, AV, MI
Navy - CG, MC, SA, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:52Z
Check the source to verify that this is the current version before use.