
METRIC
DOD-S-70340/3
22 July 1988

MILITARY SPECIFICATION SHEET

SEAL RING, STEEL, ASBESTOS FILLER, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the seal described herein shall consist of this specification and the latest issue of DOD-S-70340.

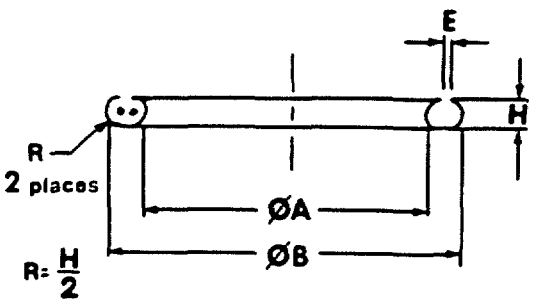

NOTES:
1. All dimensions are in millimeters.
2. Sheet Thickness = 0.30 ± 0.02

FIGURE 1. Seal ring, steel, asbestos filler, metric.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Steel with asbestos filler shall be as specified in DOD-S-DOD-S-70340

2. Part Number: The part number consists of the letter "D" the basic number of this specification sheet and a dash number taken from Table I.

Example: D70340/3-01-A
- D70340/3 — Specification sheet number
- -01 — Dash number
- -A — Tensile strength identification code

D70340/3-01-A indicates - Seal Ring, Steel, Asbestos Filler, Metric 3.5 x 6 Nominal size; 3.7 Inside Diameter; 5.9 Outside Diameter; Height 1; 362 to 440 MPa Tensile strength

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Dash Number	Nominal Size	ØA +0.3 0	ØB 0 -0.2	E (max)	H Height	Recommended for use with 1/		Weight 2/
						External Thread Size	Internal Thread Size	
01	3.5 X 6	3.7	5.9	0.12	1.5 ±0.2		M8X1	0.12
02	4 X 8	4.2	7.9	0.20				0.20
03	5 X 7.5	5.2	7.4	0.12			M10X1	0.16
04	5.5 X 8	5.7	7.9	0.12			M10X1	0.17
05	6.5 X 9.5	6.7	9.4	0.15			M12X1.5	0.22
06	8 X 11.5	8.2	11.4	0.17		M8X1	M14X1.5	0.33
07	8 X 12	8.2	11.9	0.20		M8X1		0.34
08	10 X 13.5	10.2	13.4	0.17		M10X1	M16X1.5	0.37
09	10 X 14	10.2	13.9	0.20		M10X1		0.41
10	12 X 15.5	12.2	15.4	0.17	2.0 ±0.3	M12X1.5	M18X1.5	0.52
11	12 X 16	12.2	15.9	0.20		M12X1.5		0.55
12	14 X 18	14.2	17.9	0.20		M14X1.5		0.64
13	15 X 19	15.2	18.9	0.20			M22X1.5	0.68
14	16 X 20	16.2	19.9	0.20		M16X1.5		0.71
15	17 X 21	17.2	20.9	0.20			M24X1.5	0.76
16	18 X 22	18.2	21.9	0.20		M18X1.5	M26X1.5	0.79
17	20 X 24	20.2	23.9	0.20		M20X1.5	M27X2	0.87
18	21 X 26	21.2	25.9	0.25			M30X2	1.17
19	22 X 27	22.2	26.9	0.25		M22X1.5	M30X1.5 M30X2	1.23
20	23 X 28	23.3	27.9	0.25	2.5 ±0.4			1.46
21	24 X 29	24.3	28.9	0.25		M24X1.5	M33X2	1.49

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash Number	Nominal Size	ØA +0.3 0	ØB 0 -0.2	E (max)	H Height	Recommended for use with 1/		Weight 2/
						External Thread Size	Internal Thread Size	
22	25 X 30	25.3	29.9	0.25			M33X1.5	1.56
23	26 X 31	26.3	30.9	0.25		M26X1.5		1.63
24	26 X 32	26.3	31.9	0.30		M26X1.5	M36X2	1.89
25	27 X 32	27.3	31.9	0.25		M27X2	M36X2	1.67
26	28 X 33	28.3	32.9	0.25			M36X2	1.72
27	30 X 36	30.3	35.9	0.30		M30X1.5 M30X2	M39X2 M42X2	2.14
28	32 X 38	32.3	37.9	0.30			M42X2	2.28
29	33 X 39	33.3	38.9	0.30		M33X2	M42X1.5 M42X2 M45X2	2.44
30	35 X 41	35.3	40.9	0.30			M45X2	2.48
31	36 X 42	36.3	41.9	0.30	2.5 ±0.4	M36X1.5 M36X2	M45X1.5 M45X2 M48X2	2.54
32	38 X 44	38.3	43.9	0.30		M38X1.5	M48X2	2.66
33	39 X 46	39.3	45.9	0.35		M39X2		3.40
34	40 X 47	40.3	46.9	0.35			M52X2	3.16
35	42 X 49	42.3	48.9	0.35		M42X1.5 M42X2	M52X1.5 M52X2	3.30
36	44 X 51	44.3	50.9	0.35				3.44
37	45 X 52	45.3	51.9	0.35		M45X1.5 M45X2		3.51
38	48 X 55	48.3	54.9	0.35		M48X1.5 M48X2		3.74
39	50 X 57	50.3	56.9	0.35				3.83

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash Number	Nominal Size	ØA +0.5 0	ØB 0 -0.3	E (max)	H Height	Recommended for use with 1/		Weight 2/
						External Thread Size	Internal Thread Size	
40	52 X 60	52.5	59.8	0.40		M52X1.5 M52X2		4.77
41	54 X 62	54.5	61.8	0.40				4.92
42	55 X 63	55.5	62.8	0.40				5.00
43	56 X 64	56.5	63.8	0.40		M56X2		5.10
44	58 X 66	58.5	65.8	0.40				5.27
45	60 X 68	60.5	67.8	0.40		M60X2		5.41
46	64 X 72	64.5	71.8	0.40		M64X2		5.75
47	65 X 74	65.5	73.8	0.45		M65X2		6.90
48	70 X 79	70.5	78.8	0.45				7.39
49	75 X 84	75.5	83.8	0.45				7.87
50	78 X 88	78.5	87.8	0.50	3.0 ±0.5	M78X2		8.95
51	80 X 90	80.7	89.8	0.50				9.28
52	85 X 95	85.7	94.8	0.50				9.70
53	90 X 100	90.7	99.8	0.50				10.20
54	95 X 105	95.7	104.8	0.50				10.70
55	100 X 110	100.7	109.8	0.50				11.30
56	105 X 115	105.7	114.8	0.50				11.90
57	110 X 120	110.7	119.8	0.50				12.40
58	115 X 125	115.7	124.8	0.50				12.90
59	120 X 130	120.7	129.8	0.50				13.50
60	125 X 135	125.7	134.8	0.50				14.00

1/ Empty blocks in the "recommended for use with" column indicate that, for the nominal size, no thread is applicable.

2/ Weight = Kg/1000 pieces; calculated using a density of 7.85 Kg/dm^3 for steel and 1.2 Kg/dm^3 for asbestos filler.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - SH
Air Force - 99

Review activities:
Army - MI, MR
Navy - OS
Air Force - 82
DLA - IS

User activities:
Army - AT, AV, GL, ME
Navy - AS, YD
Air Force - 68

Civil agencies coordinating activities:
GSA - FSS

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5330-0701)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.