
INCH-POUND
•MIL-C-55302/143D
17 November 1988
SUPERSEDING
MIL-C-55302/143A
24 April 1981

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES· RECEPTACLE WITH SOCKET CONTACTS, 3 KEYING GUIDES, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

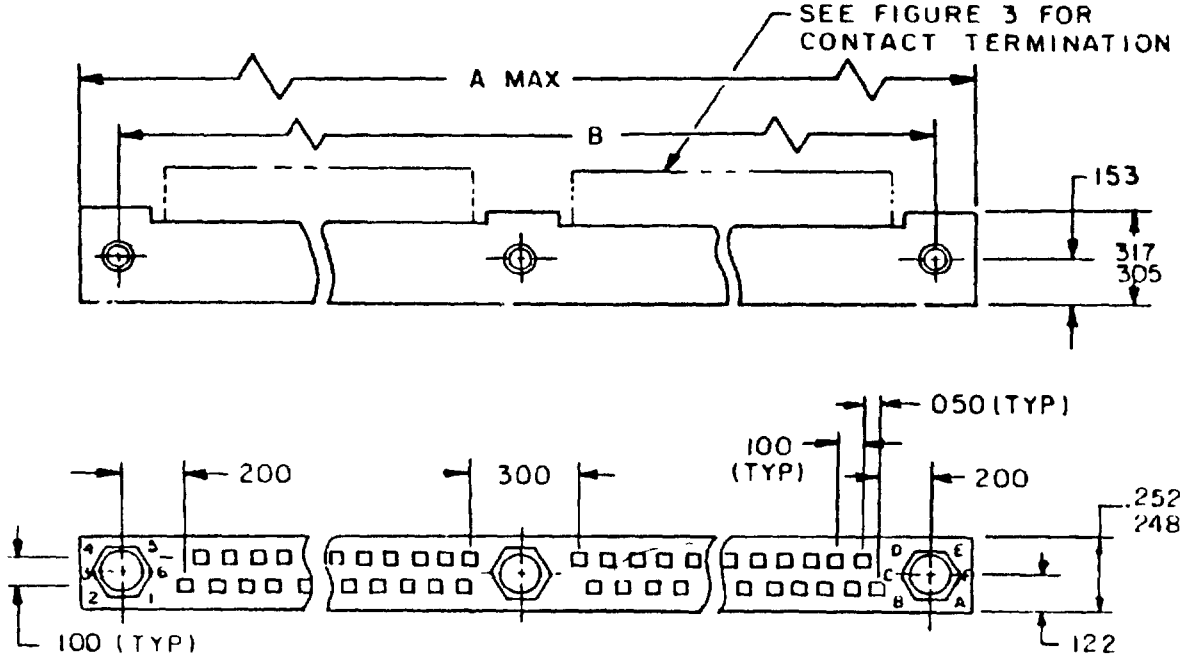

Inches	mm	Inches	mm
.050	1.27	.252	6 40
.100	2.54	.300	7.62
172	3 10	.305	7.45
.153	3.89	.317	8.05
.200	5.08		
.248	6.30		

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance is ±.005 (0 13 mm)


FIGURE 1 Connector, plug (.100 inch spacing)

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

TABLE I Arrangements and characteristics.


Contact arrangement	No of contacts	Dimensions (Inches) A Max	Dimensions (Inches) B ±.006
M55302/143A	72	4.516 (114.70)	4.200 (106.68)
M55302/143B	84	5.114 (129.90)	4.800 (121.92)
M55302/143C	96	5.717 (145.20)	5.400 (137.16)

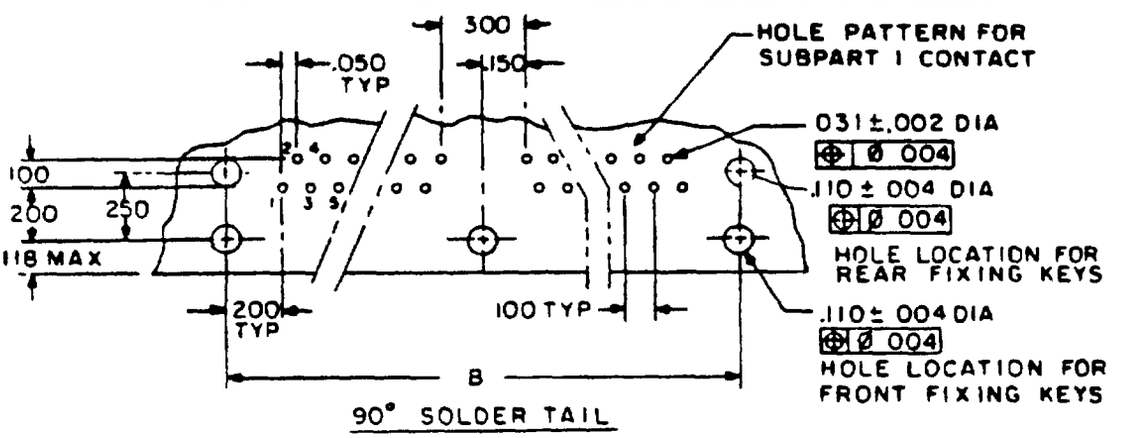

90° SOLDER TAIL

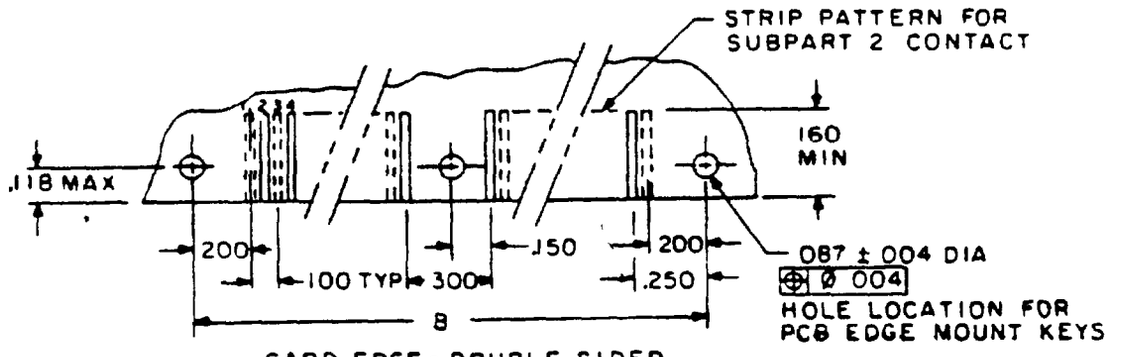

CARD EDGE - DOUBLE SIDED

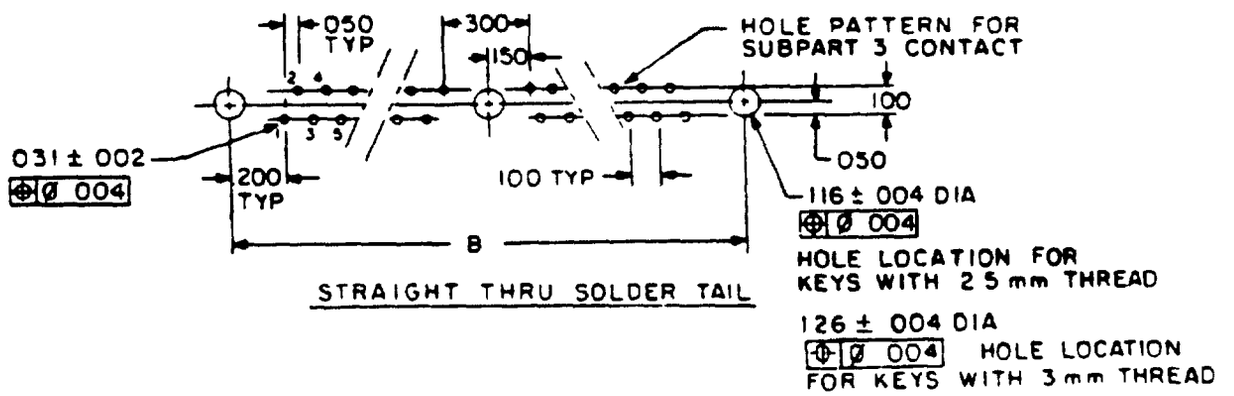

STRAIGHT THRU SOLDER TAIL

FIGURE 2. Recommended hole patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Inches	mm
.002	0.05
.004	0.10
.031	0.79
.050	1.27
.087	2.21
.100	2.54
.110	2.79
.116	2.95
.118	3.00
.126	3.20
.150	3.81
.160	4.06
.200	5.08
.250	6.35
.300	7.62

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses.

FIGURE 2. Recommended hole patterns - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.



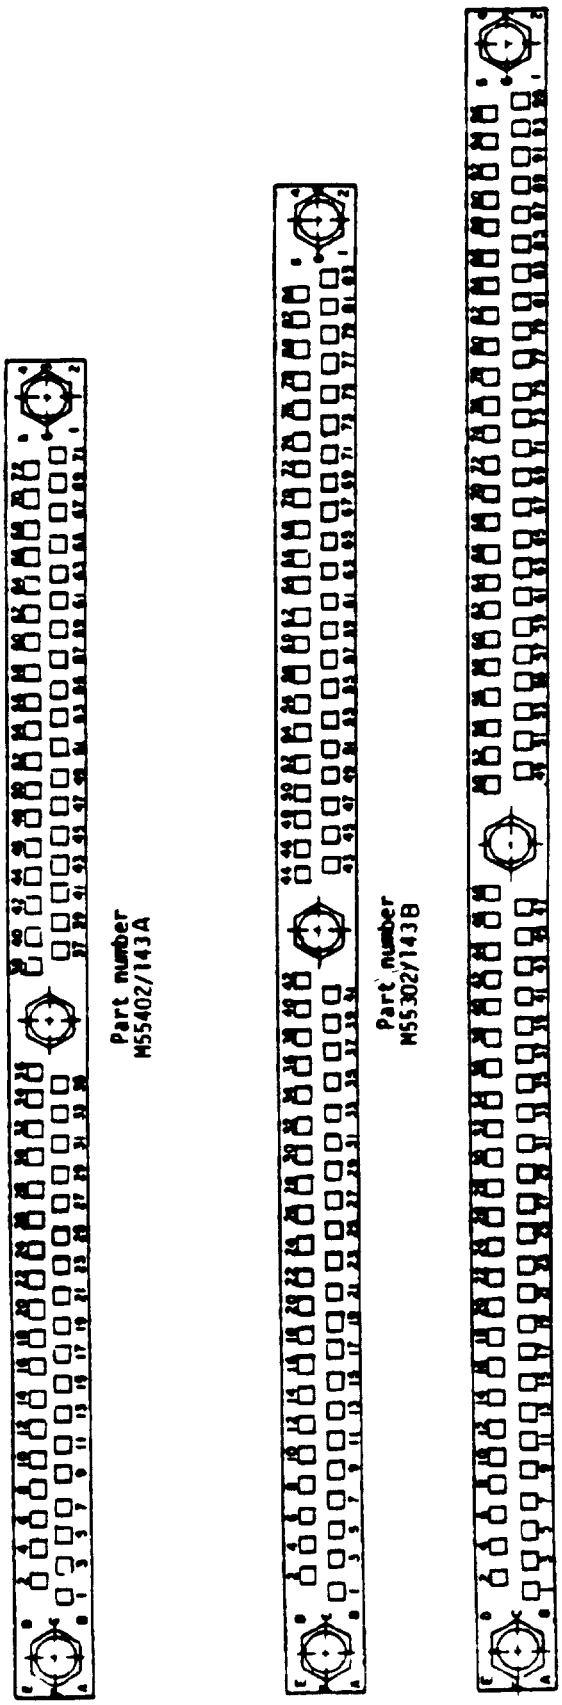


FIGURE 3. Contact arrangements and keying arrangements.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

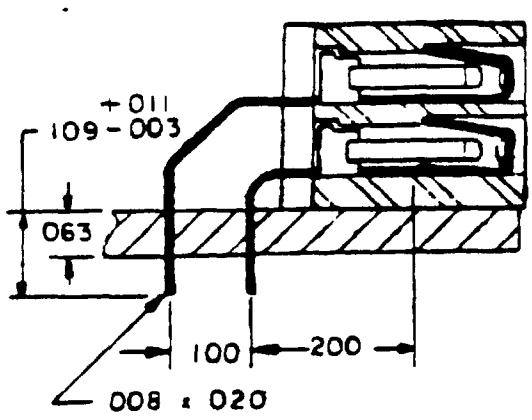


Subpart 1
90° Solder tails

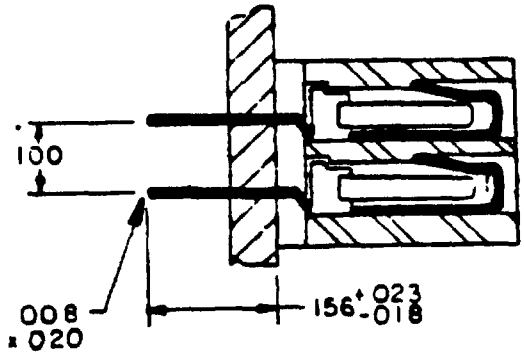


Subpart 3
Solder tails

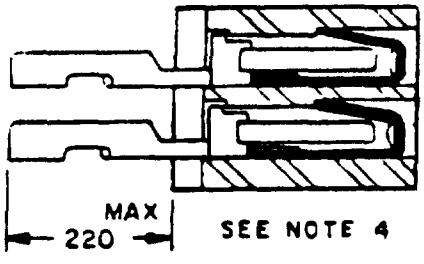


Subpart 4
Solder terminals

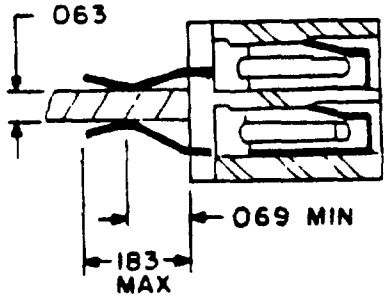


Subpart 2
Card edge

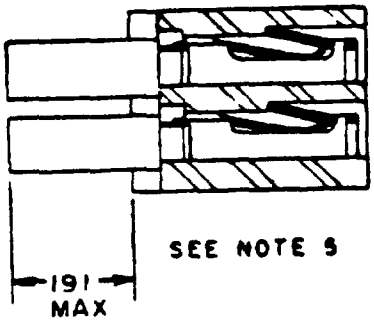

Subpart 5

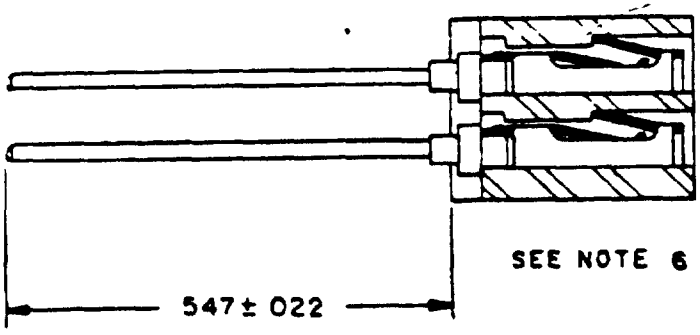

Subpart 6 SEE NOTE 4
Wire wrappost

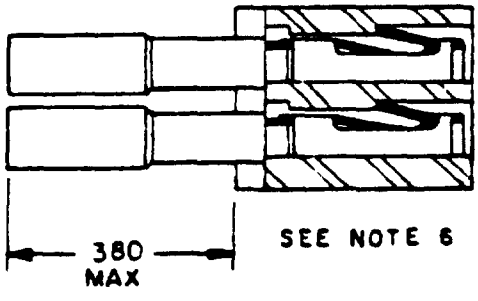

Subpart 7
Crimp 22 AWG


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Contact accepts no. 22 AWG wire.
5. Contact, crimp type, accepts no 22-26 AWG wires.
6. Contact with .025 (0.64 mm) wrappost in accordance with MIL-STD-1130.

Inches	mm	Inches	mm
.003	0.08	100	2 54
008	0 20	.109	2 77
.011	0 28	156	3 96
018	0 46	183	4 65
.020	0 51	.191	4 85
022	0 56	200	5 08
023	0 58	220	5 59
063	1 60	380	9 65
069	1 75	547	13 89

FIGURE 4. Connector terminations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

72 AND 84 CONTACTS

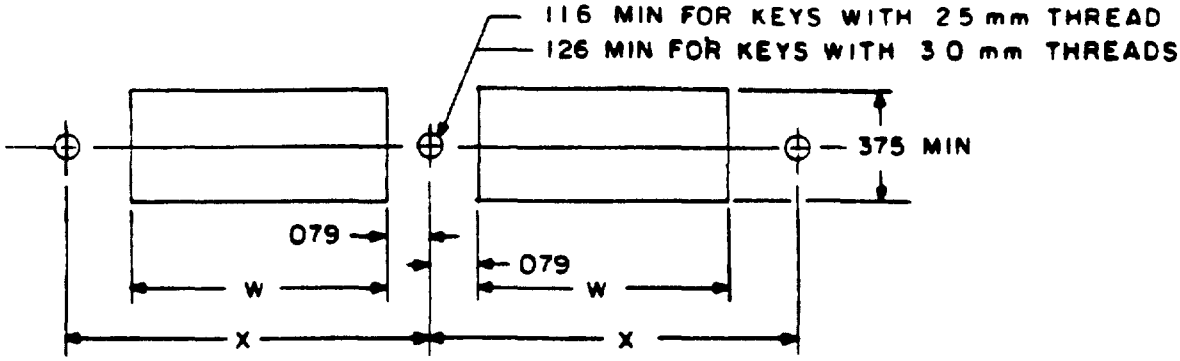

FIXED MOUNT

72, 84, AND 96 CONTACTS

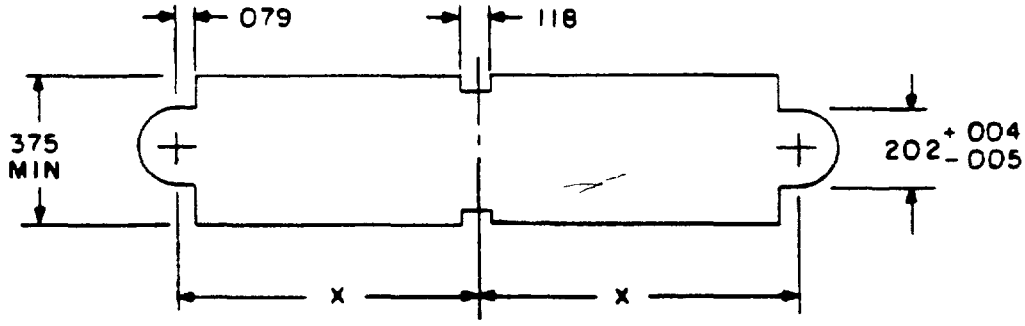

FLOATING MOUNT

Inches	mm	Inches	mm
.004	0.10	.375	9.53
.005	0.13	1.93	49.02
.079	2.01	2.10	53.34
.106	2.69	2.23	56.64
.118	3.00	2.40	60.96
.126	3.20	2.53	64.26
.202	5.13	2.70	68.58

No. of contacts	72	84	96
W min	1.93	2.23	2.53
X	2.10	2.40	2.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Floating mount panel thickness .085 (2.15 mm) maximum.

FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 5 and table I.

Contact identification. See figure 3.

Contact retention: 4 pounds minimum for each contact.

Contact engagement: 0.7 ounce minimum, 3.6 ounces maximum.

Contact separation: 0.5 ounce minimum.

Measured using test pins and procedures defined in MIL-C-55302/142.

Contact resistance: Shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating, maximum. 3.0 amperes.

Keying socket: Two hexagonal keyed guides provide 36 polarizing positions. Keys are constructed in accordance with M55302/154. Connectors are supplied with keying pins in the "1" and "A" positions, except for 1/4-turn locking styles, which are keyed in "F" and "6" positions. When required, connectors can be easily keyed to the desired position by using a standard wrench or screwdriver.

Crimping tools (for subparts 4 and 6):

Basic tool: M22520/2-01.

Positioner: M22520/2-36.

Removal tool: See M81969/40-01.

Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154.


Mating connectors: Shall conform to MIL-C-55302/141.

Oversize pin exclusion test: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

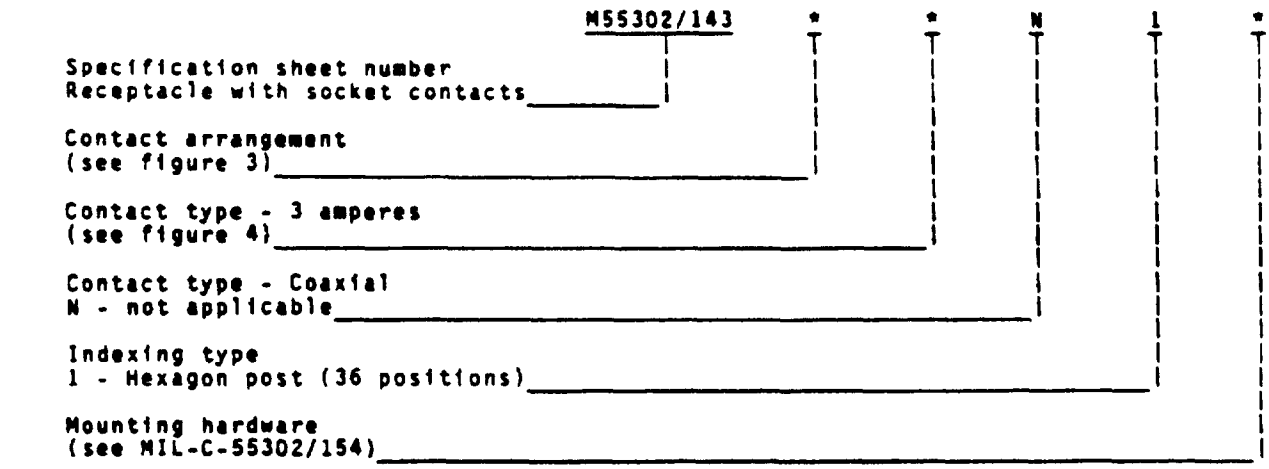

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3652-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.