INCH-POUND

MIL-DTL-55302/90F
w/AMENDMENT 2
28 February 2025
SUPERSEDING
MIL-DTL-55302/90F
w/AMENDMENT 1
9 January 2020

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, RIGHT ANGLE, HERMAPHRODITIC CONTACT (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.


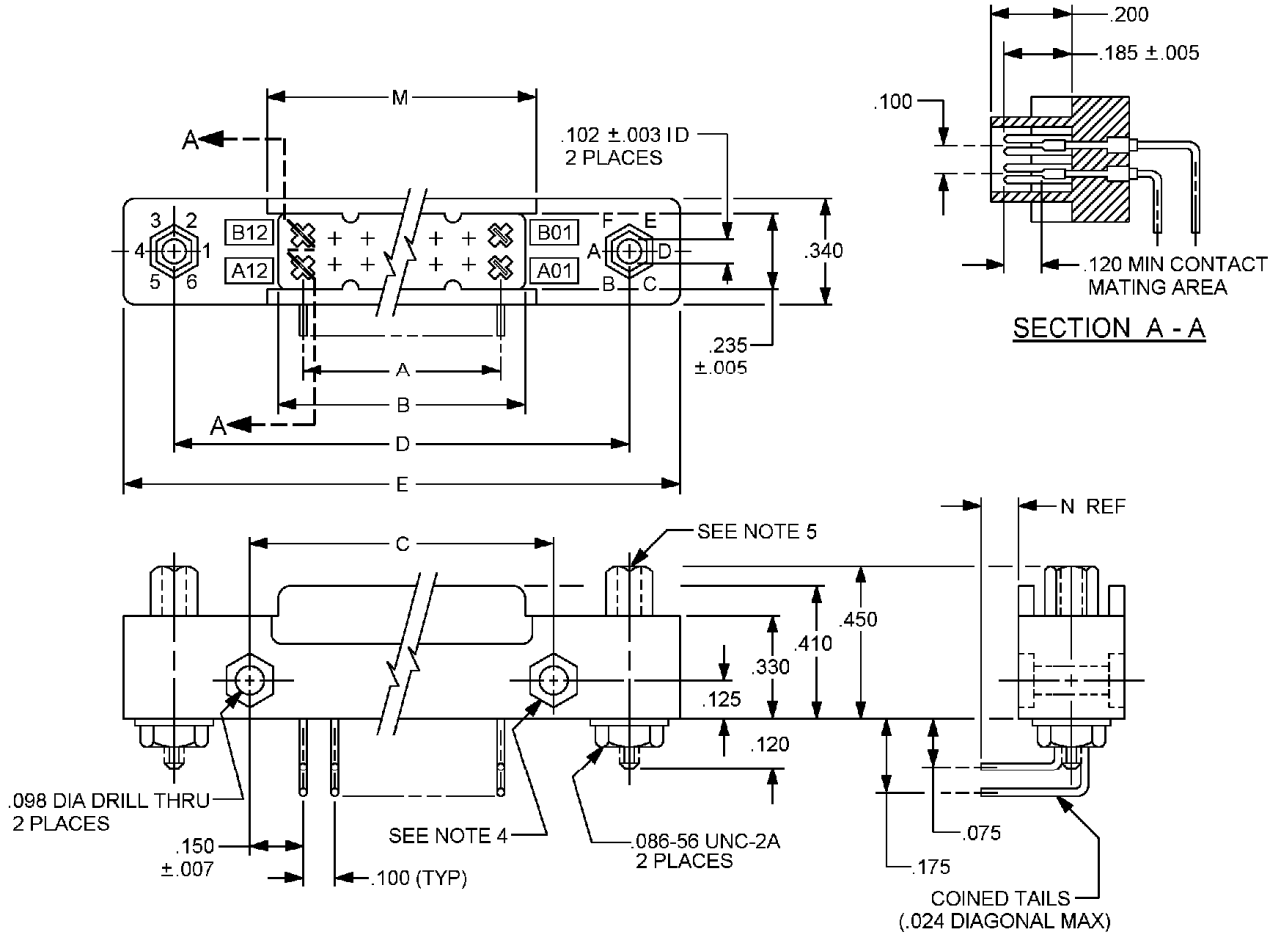


FIGURE 1. Connector receptacle (.100 inch spacing).

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

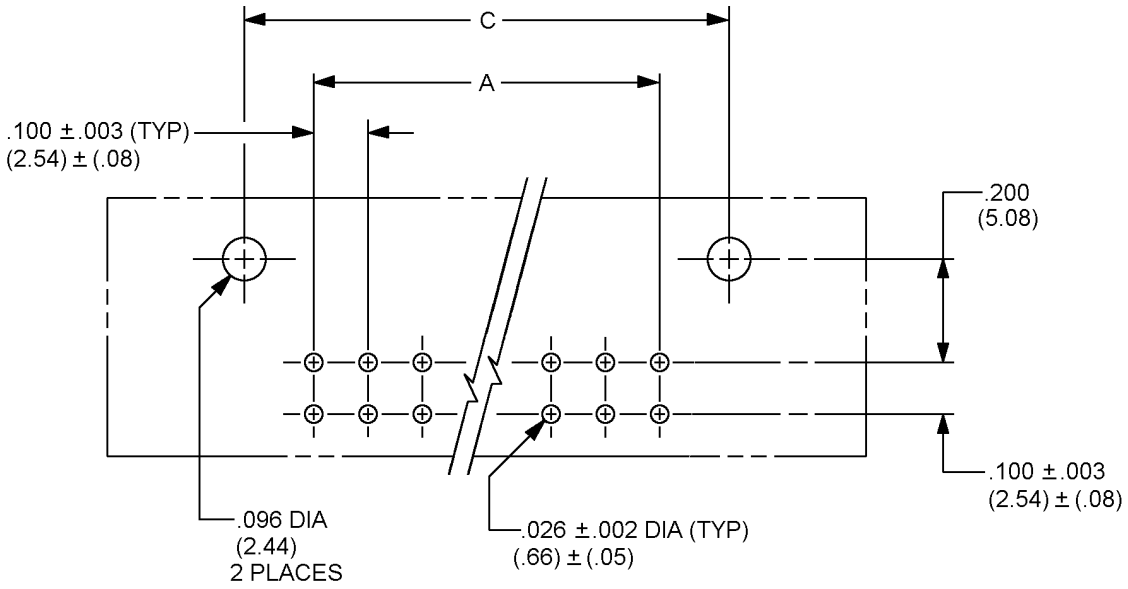

TYPICAL HOLE GRID LAYOUT

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.098	2.49	.175	4.44	.330	8.38
.005	0.13	.100	2.54	.185	4.70	.340	8.64
.024	0.61	.102	2.59	.200	5.08	.410	10.41
.075	1.91	.120	3.05	.235	5.97	.462	11.73
.086	2.18	.125	3.18				

For .054 to .070 thick printed circuit board								
Dash number	Number of contacts	Dimensions						
		A ±.006 (0.15)	B ±.006 (0.15)	C ±.006 (0.15)	D ±.006 (0.15)	E ±.006 (0.15)	M ±.006 (0.15)	N REF
01	24	1.100 (27.94)	1.236 (31.39)	1.400 (35.56)	1.900 (48.26)	2.200 (55.88)	1.270 (32.26)	.110 (2.79)
02	48	2.300 (58.42)	2.436 (61.87)	2.600 (66.04)	3.100 (78.74)	3.400 (86.36)	2.470 (62.74)	
03	72	3.500 (88.90)	3.636 (92.35)	3.800 (96.52)	4.300 (109.22)	4.600 (116.84)	3.670 (93.22)	
04	96	4.700 (119.38)	4.836 (122.83)	5.000 (127.00)	5.500 (139.70)	5.800 (147.32)	4.870 (123.70)	

FIGURE 1. Connector receptacle (.100 inch spacing) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

For .084 to .103 thick printed circuit board								
Dash number	Number of contacts	Dimensions						
		A ±.006 (0.15)	B ±.006 (0.15)	C ±.006 (0.15)	D ±.006 (0.15)	E ±.006 (0.15)	M ±.006 (0.15)	N REF
05	24	1.100 (27.94)	1.236 (31.39)	1.400 (35.56)	1.900 (48.26)	2.200 (55.88)	1.270 (32.26)	.123 (3.12)
06	48	2.300 (58.42)	2.436 (61.87)	2.600 (66.04)	3.100 (78.74)	3.400 (86.36)	2.470 (62.74)	
07	72	3.500 (88.90)	3.636 (92.35)	3.800 (96.52)	4.300 (109.22)	4.600 (116.84)	3.670 (93.22)	
08	96	4.700 (119.38)	4.836 (122.83)	5.000 (127.00)	5.500 (139.70)	5.800 (147.32)	4.870 (123.70)	

For .115 to .135 thick printed circuit board								
Dash number	Number of contacts	Dimensions						
		A ±.006 (0.15)	B ±.006 (0.15)	C ±.006 (0.15)	D ±.006 (0.15)	E ±.006 (0.15)	M ±.006 (0.15)	N REF
09	24	1.100 (27.94)	1.236 (31.39)	1.400 (35.56)	1.900 (48.26)	2.200 (55.88)	1.270 (32.26)	.155 (3.94)
10	48	2.300 (58.42)	2.436 (61.87)	2.600 (66.04)	3.100 (78.74)	3.400 (86.36)	2.470 (62.74)	
11	72	3.500 (88.90)	3.636 (92.35)	3.800 (96.52)	4.300 (109.22)	4.600 (116.84)	3.670 (93.22)	
12	96	4.700 (119.38)	4.836 (122.83)	5.000 (127.00)	5.500 (139.70)	5.800 (147.32)	4.870 (123.70)	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm).
4. Dimensions are .162 (4.11 mm) hex across the flats by .052 deep (1.32 mm) – 4 places.
5. Keying sockets shown are in positions 4 and D.

FIGURE 1. Connector receptacle (.100 inch spacing) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Material and finish:

Contact: 0.020 inch thick phosphor bronze in accordance with ASTM B139/B139M, composition A. Gold plate in accordance with ASTM B488, type II, code D, class 1.27, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 2, 30 to 100 microinches.

Insulator: ASTM D5948, type SDG-F.

Keying hardware: 2 each hex nuts and washers, stainless steel, class 300 in accordance with ASTM B582, passivated in accordance with SAE-AMS2700, type 2, and 2 each keying sockets, free machining brass in accordance with ASTM B16/B16M, UNS C36000 or ASTM B121/B121M, UNS C35300, C34200 or ASTM B124/B124M, UNS C37700, ASTM B36/B36M, UNS C23000, C24000, C26000 or C26800, nickel plated in accordance with SAE-AMS-QQ-N-290. For direct government procurement the keying hardware shall be assembled to the connector. For other orders the keying hardware may be furnished loose as specified in contract or order.

Mounting hardware: 2 each machine screws 2-56, 0.5 inch long, 2 flat washers, and 2 hex nuts or corrosion resistant steel, shall be furnished in a bag within the connector package for direct government orders. For other orders, the mounting hardware may be furnished loose as specified in contract or order.

Contact identification: The first and last contact in each row shall be identified by an alphabetical-numerical code (e.g., A01, B12). The letter designates the row and the number designates the contact position within that row. Every fifth contact in each row shall have its identification mark molded in.

Contact retention: 6 pounds.

Mating and unmating: The maximum insertion force, in pounds, shall not exceed a value equal to .5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .11 times the number of contacts and shall not exceed the measured insertion force.

Contact separation force: 1 ounce minimum.

Contact resistance: The contact resistance shall not exceed 20 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 volts rms, 60 Hz.

High altitude: 300 volts rms, 60Hz.

Current rating, maximum: 5 amperes.

Keying socket: When required, can be easily keyed to the desired positions by using a standard type wrench. Connectors are supplied with keying sockets in 4 and D positions.

Mating connectors: Shall conform to and MIL-DTL-55302/91 or MIL-DTL-55302/93 and MIL-DTL-55302/95.

Part or Identifying Number (PIN): M55302/90-(dash number from figure I).

Group submission: MIL-DTL-55302/92, MIL-DTL-55302/94, and MIL-DTL-55302/96.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

Qualification: Qualification is not required for this specification sheet.

First article testing (FAT): FAT shall be in accordance with MIL-DTL-55302, qualification inspection.

Sample size: 6 connectors shall be subjected to the FAT. All sample units shall be subjected to the inspections in subgroup I. The sample units shall be divided equally into 3 groups of 2 and subjected to the inspection for their particular subgroups. Contacts shall be tested as specified in subgroup 4A or 4B as applicable.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/91	ASTM B16/B16M	SAE-AMS2700
MIL-DTL-55302/92	ASTM B121/B121M	SAE-AMS-QQ-N-290
MIL-DTL-55302/93	ASTM B124/B124M	
MIL-DTL-55302/94	ASTM B139/B139M	
MIL-DTL-55302/95	ASTM B36/B36M	
MIL-DTL-55302/96	ASTM B488	
	ASTM B582	
	ASTM D5948	

CONCLUDING MATERIAL

Custodians:
Army – CR
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-2025-004)

Review activities:
Army – AR, AT, AV, CR4, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.