INCH-POUND

MIL-F-52749C(ME)
AMENDMENT 1
26 July 1994

MILITARY SPECIFICATION

FORWARD AREA REFUELING EQUIPMENT

(FARE)

This amendment forms a part of MIL-F-52749C(ME), dated 12 February 1992, is approved for use within the USA Belvoir Research, Development Engineering Center, Department of the Army, and is available for use by all Department and Agencies of the Department of Defense.

PAGE 2

2.1.1 SPECIFICATIONS, FEDERAL, change "A-A-1899" to "A-A-1898".

Under SPECIFICATIONS, MILITARY, add:

"MIL-C-83413/4	- Connectors and Assemblies, Electrical, Aircraft Grounding: Grounding Clamp Connector for Type I and III Grounding Assemblies, Clip, Electrical.
"MIL-W-83420	- Wire Rope, Flexible, for Aircraft Control.
"MIL-W-83420/4	- Wire Rope, Flexible, Type II (Jacketed), Composition B.".

2.1.1 STANDARDS, MILITARY, delete "MS25384" and "MS70091" in their entirety.

Add:

"MS27027	- Coupling Half, Quick Disconnect, Cam-Locking Type, Female, Flanged, Type VIII.".

PAGE 6

3.8.1, line 5, delete: "conforming to MS70091." and substitute: "with a dust plug conforming to MS27027-11.".

3.8.1.1, delete second sentence and substitute: "The nozzle to vehicle ground cable shall conform to figure 2.".

AMSC N/A FSC 4930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

PAGE 7

3.15, add to end of paragraph: "Color shall be as specified (see 6.2)".

PAGE 13

4.6.5.4, delete first sentence and substitute: "With the FARE assembled and operating as specified in 4.6.5.1, an ohmmeter shall be used to determine electrical continuity from the inlet of the suction hose to the outlet of each type of nozzle.".

PAGE 16

5.3.1, delete third sentence and substitute: "The components shall be secured to the skid base with U-bolts or equivalent, to resist any movement or shifting of the components during testing or shipping.".

5.4, line 1, change: "on" to "or".

PAGE 18

6.11, delete in its entirety.

PAGE 20


FIGURE 2, delete entire figure and substitute new figure.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 4930-A397

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

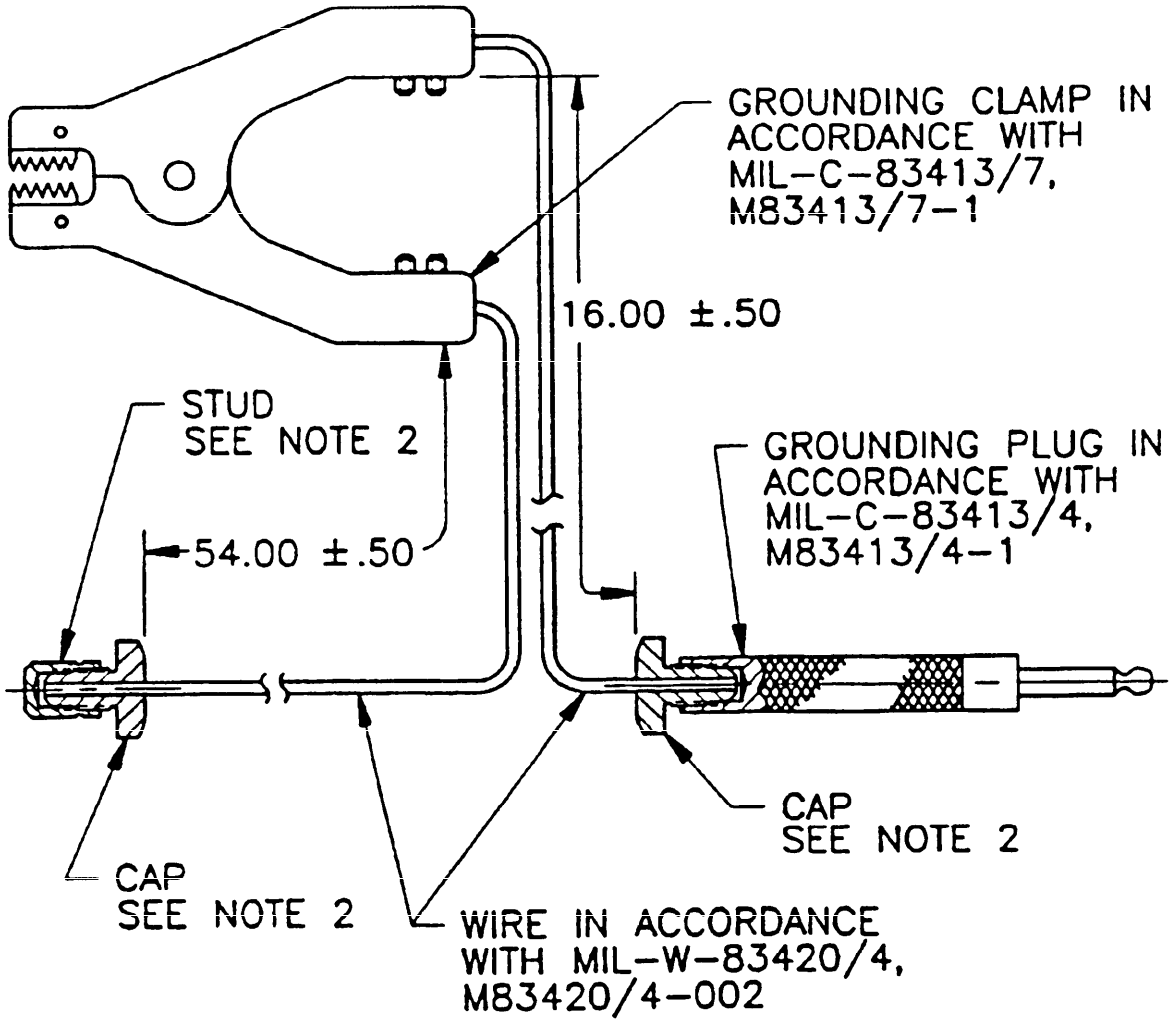

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. CAPS AND STUD SHALL COMPLY WITH THE REQUIREMENTS AS SPECIFIED IN MIL-C-83413/10.

FIGURE 2. Nozzle-to-vehicle ground cable assembly.

X-5065

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:32Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.