INCH-POUND


MIL-I-49466/1
2 April 1990
SUPERSEDING
MIL-M-38527/8 (IN PART)
7 September, 1984

MILITARY SPECIFICATION SHEET


INSULATOR; DISKS, PLATES, AND WASHERS
POLYIMIDE
.002 or .005 INCH THICK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the insulators described herein shall consist of this specification and the latest issue of MIL-I-49466.

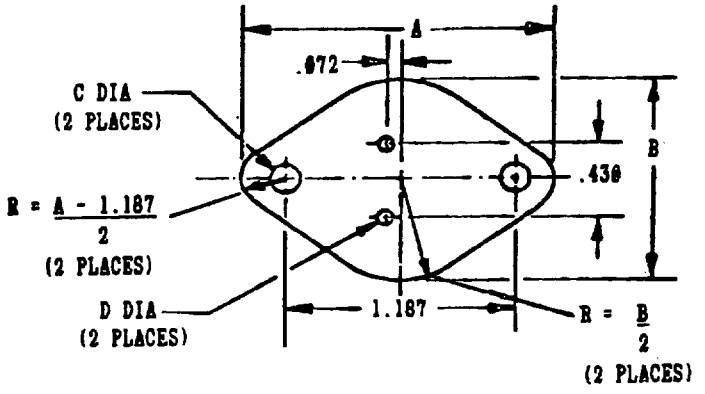

TO-3
Configuration A - Dash nos. 001P thru 020P

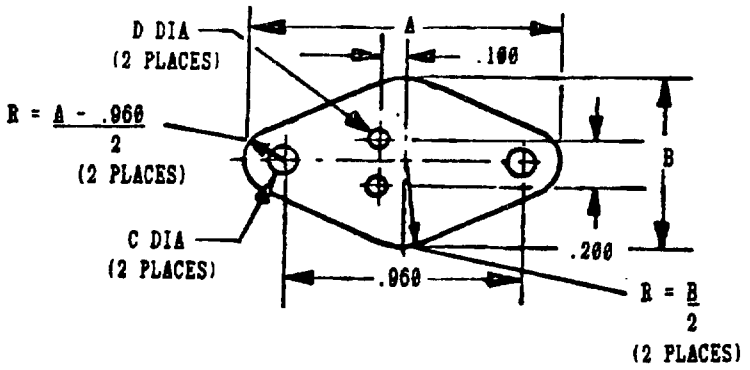

Inches	mm
.072	1.83
.100	2.54
.200	5.08
.430	10.92
.960	24.38
1.187	30.15

TO-66
Configuration B - Dash nos. 021P thru 032P

FIGURE 1. Insulator; Plates.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

Part Number M49466/01- Thickness		Dimensions (mm in parentheses)				
.002 (.05)	.005 (.13)	A	B	C	D	Config-uration
001P	002P	1.730 (43.94)	1.250 (31.75)	.140 (3.56)	.062 (1.57)	A
003P	004P	1.655 (42.04)	1.063 (27.00)	.156 (3.96)	.062 (1.57)	A
005P	006P	1.655 (42.04)	1.063 (27.00)	.156 (3.96)	.166 (4.22)	A
007P	008P	1.563 (39.70)	1.050 (26.67)	.140 (3.56)	.062 (1.57)	A
009P	010P	1.526 (38.76)	1.010 (25.65)	.156 (3.96)	.156 (3.96)	A
011P	012P	1.655 (42.04)	1.125 (28.58)	.156 (3.96)	.062 (1.57)	A
013P	014P	1.655 (42.04)	1.187 (30.15)	.156 (3.96)	.203 (5.16)	A
015P	016P	1.730 (43.94)	1.250 (31.75)	.125 (3.18)	.062 (1.57)	A
017P	018P	1.730 (43.94)	1.250 (31.75)	.156 (3.96)	.062 (1.57)	A
019P		1.579 (40.11)	1.056 (26.82)	.140 (3.56)	.050 (1.27)	A
020P		1.627 (41.32)	1.094 (27.79)	.125 (3.18)	.050 (1.27)	A
021P	022P	1.312 (33.32)	.762 (19.35)	.140 (3.56)	.093 (2.36)	B
023P	024P	1.312 (33.32)	.762 (19.35)	.140 (3.56)	.062 (1.57)	B
025P	026P	1.440 (36.58)	1.000 (25.4)	.140 (3.56)	.062 (1.57)	B
027P	028P	1.500 (39.10)	.938 (23.83	.140 (3.56)	.062 (1.57)	B
029P	030P	1.250 (31.75)	.700 (17.78)	.140 (3.56)	.062 (1.57)	B
031P		1.400 (35.56)	.750 (19.05)	.125 (3.18)	.050 (1.27)	B
032P		1.360 (34.54)	.790 (20.07)	.120 (3.05)	.062 (1.57)	B

FIGURE 1 - Insulator; Plates. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

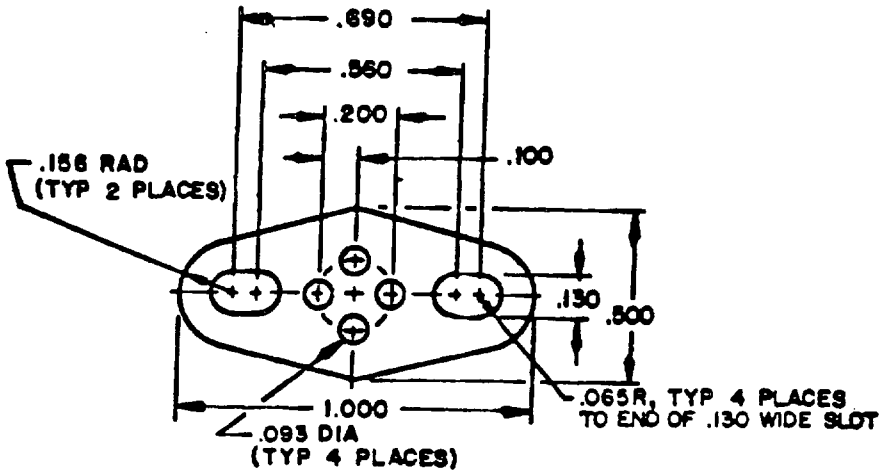

Part Number M49466/01-		Figure
Thickness		
.002 (.05)	.005 (.13)	
040P	041P	2
042P	043P	3
044P	045P	4

FIGURE 2. Insulator; Plate.

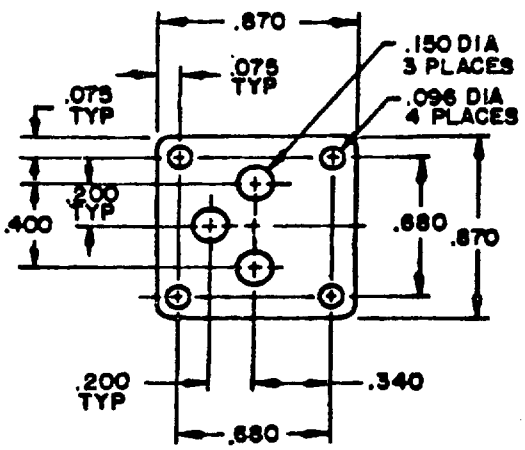


FIGURE 3. Insulator; Plate.


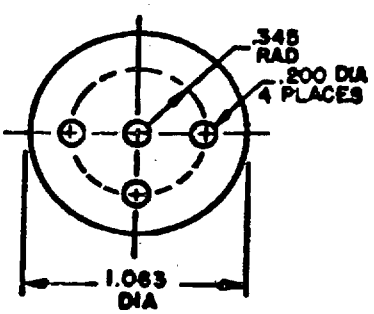


FIGURE 4. Insulator; Disk.


Inches	mm	Inches	mm	Inches	mm
.002	.05	.130	3.30	.500	12.70
.005	.13	.150	3.81	.560	14.22
.065	1.65	.156	3.96	.680	17.27
.075	1.90	.200	5.08	.690	17.53
.093	2.36	.340	8.64	.870	22.10
.096	2.44	.345	8.76	1.000	25.40
.100	2.54	.400	10.16	1.063	27.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

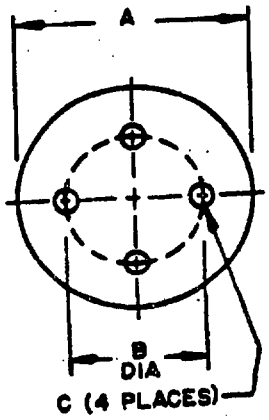

Part Number M49466/01- Thickness		Dimensions		
.002 (.05)	.005 (.13)	A	B	C
050P	051P	.390 (9.91)	.200 (5.08)	.036 (.91)
052P	053P	.250 (6.35)	.100 (2.54)	.036 (.91)

FIGURE 5. Insulator; Disks.

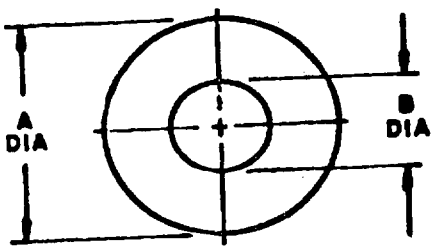

Part Number M49466/01- Thickness		Dimensions	
.002 (.05)	.005 (.13)	A	B
060P	061P	.250 (6.35)	.094 (2.39)
062P	063P	.250 (6.35)	.120 (3.05)
064P	065P	.437 (11.10)	.125 (3.18)
066P	067P	.375 (9.52)	.156 (3.96)
068P	069P	.375 (9.52)	.166 (4.22)
070P	071P	.500 (12.70)	.172 (4.37)
072P	073P	.500 (12.70)	.196 (4.98)
074P	075P	.562 (14.27)	.203 (5.16)
076P	077P	.625 (15.88)	.265 (6.73)
078P	079P	.812 (20.62)	.265 (6.73)
080P	081P	.875 (22.22)	.265 (6.73)
082P	083P	1.000 (25.40)	.265 (6.73)
084P	085P	.880 (22.35)	.320 (8.13)
086P	087P	.750 (19.05)	.328 (8.33)
088P	089P	1.125 (28.58)	.328 (8.33)
090P	091P	1.375 (34.92)	.390 (9.91)
092P	093P	1.375 (34.92)	.515 (13.08)
094P	095P	1.625 (41.28)	.781 (19.84)

FIGURE 6. Insulator; Washers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimension are in inches.
2. Metric equivalents (to the nearest .01) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerances are ±.015(.38 mm), ±.010 (.25mm) on hole diameters and ±10% on thicknesses.

REQUIREMENTS:

Design and configuration: See figures 1 thru 6.

Material: Polyimide in accordance with MIL-I-46112, type I (material symbol P)

Thermal impedance: .60 °C in^2/W maximum

Part number: M49466/01- (and dash number from applicable table).

TABLE I Supersession information

Dash Number	Superseded Number M38527/08-	Dash Number	Superseded Number M38527/08-	Dash Number	Superseded Number M38527/08-
001P	001P	028P	028P	070P	072P
002P	002P	029P	029P	071P	073P
003P	003P	030P	030P	072P	074P
004P	004P	031P	031P	073P	075P
005P	005P	032P	032P	074P	076P
006P	006P	040P	050P	075P	077P
007P	007P	041P	051P	076P	078P
008P	008P	042P	060P	077P	079P
009P	009P	043P	061P	078P	080P
010P	011P	044P	055P	079P	081P
012P	012P	045P	056P	080P	082P
013P	013P	050P	040P	081P	083P
014P	014P	051P	041P	082P	084P
015P	016P	052P	042P	083P	085P
017P	017P	053P	043P	086P	087P
018P	018P	060P	062P	087P	089P
019P	019P	061P	063P	088P	090P
020P	020P	062P	064P	089P	091P
021P	021P	063P	065P	090P	092P
022P	022P	064P	066P	091P	093P
023P	023P	065P	067P	092P	094P
024P	024P	066P	068P	093P	095P
025P	025P	067P	069P	094P	096P
026P	026P	068P	070P	095P	097P
027P	027P	069P	071P		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ER
Navy - SH
Air Force - 85

Review Activities:

DLA - GS
Air Force - 11, 19, 99

User Activities:

Navy - CG, MC

Agent:

DLA - GS

Preparing Activity:

Army - ER

(Project 5970-0633-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.