
MILITARY SPECIFICATION SHEET

BATTERY, STORAGE, AIRCRAFT, NICKEL-CADMIUM, CONNECTOR, TAB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of specification MIL-B-81757.

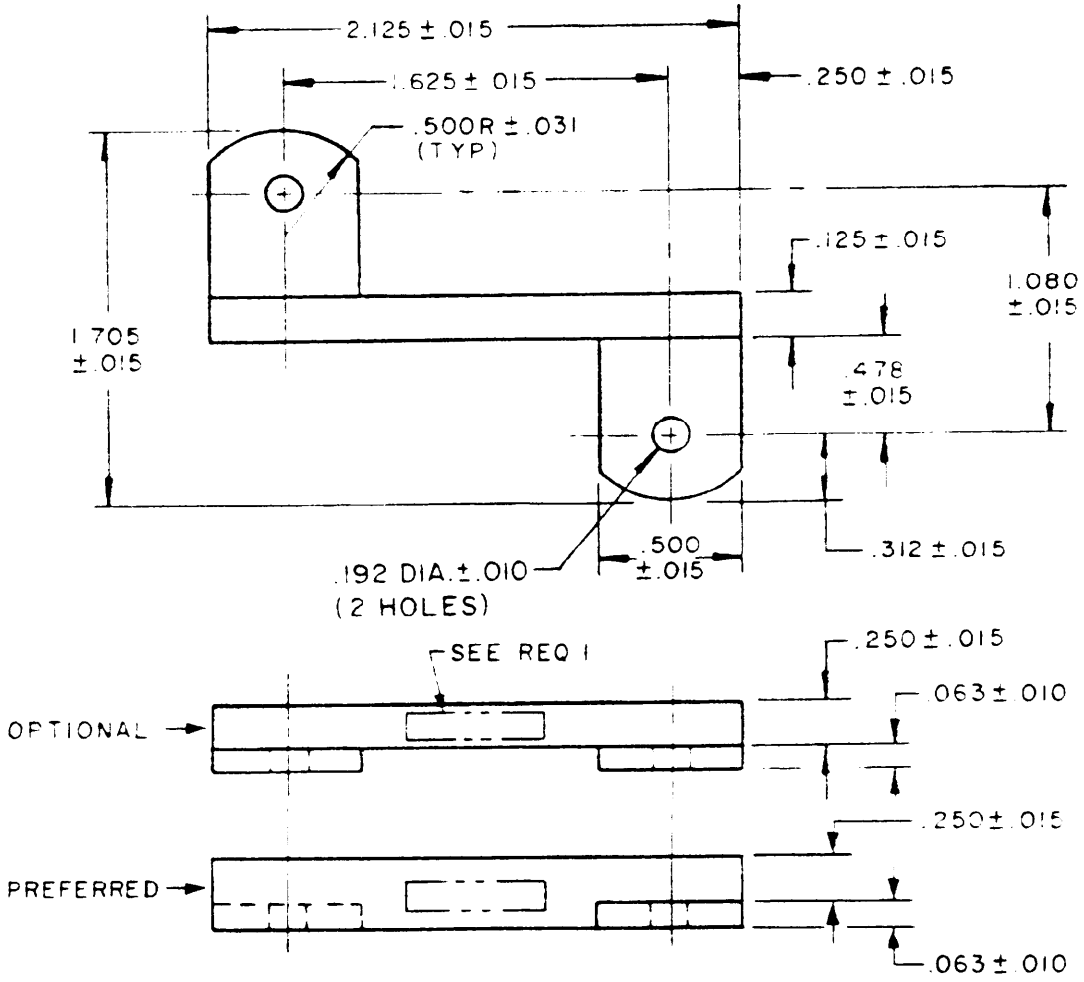


PART NO. M81757/4-1
USED WITH PART NO. M81757/7-2
AND M81757/7-3

FIGURE 1. Connector, tab.


FSC 6140


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

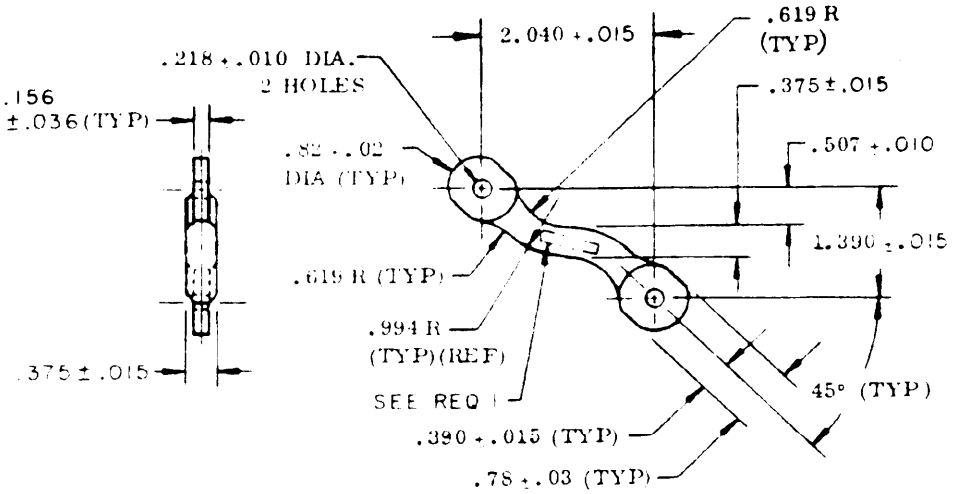

C	PART NO. M81757/4-2
	USED WITH PART NO. M81757/9-2
	AND M81757/9-3

FIGURE 2. Connector, tab.

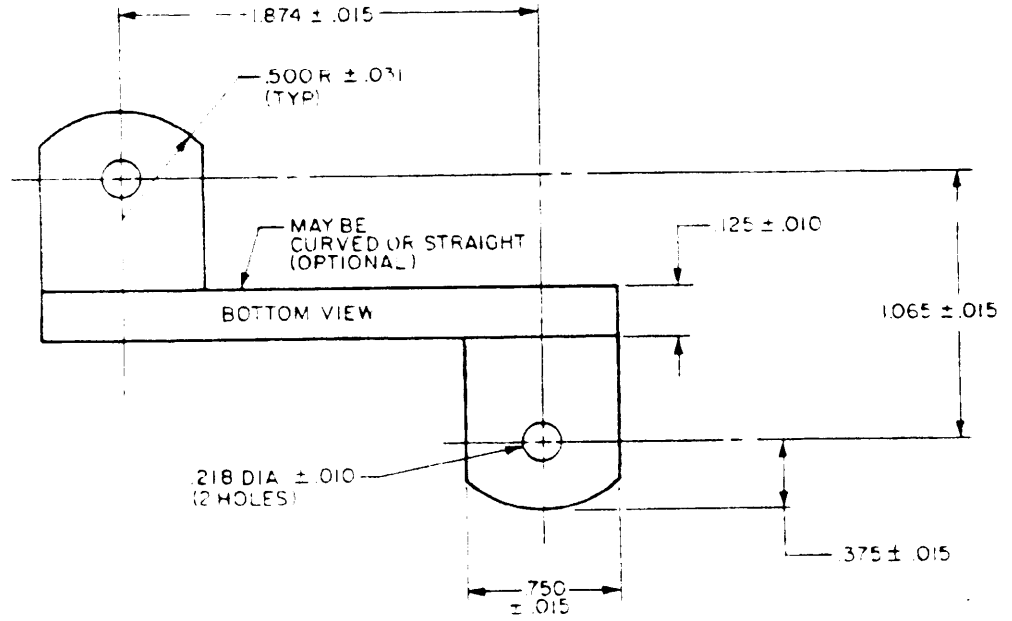

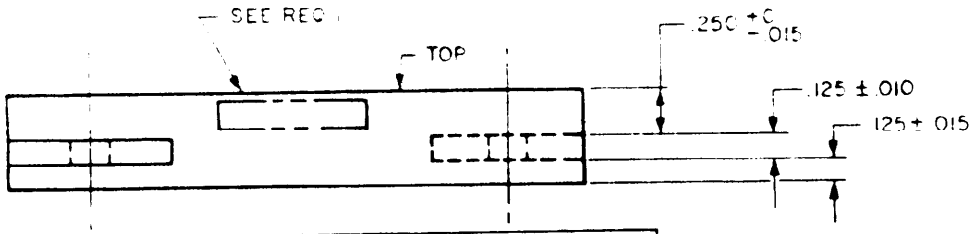

C	PART NO. M81757/4-3
	USED WITH PART NO. M81757/11-1,
	M81757/11-2 AND M81757/11-3

FIGURE 3. Connector, tab.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part number shall be stamped using .125 inch high characters, .005 inch deep minimum before plating.

2. Strap shall be constructed of copper conforming to Federal Specification QQ-C-502.

3. Strap shall be plated in accordance with Federal Specification QQ-N-290, Class 1 Grade E.

Custodians:
Navy - AS
Air Force - 11
Army - ER

Preparing Activity:
Navy - AS
(Project No. 6140-0595)

Review Activities:
Air Force - 99
Army - AV

User Activities:
Coast Guard - CG

NOTICE: Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:04Z
Check the source to verify that this is the current version before use.