
MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, RACK ASSEMBLY, TRACK FEEDBACK TYPE, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the rack described herein shall consist of this document and the latest issue of specification MIL-T-81714.

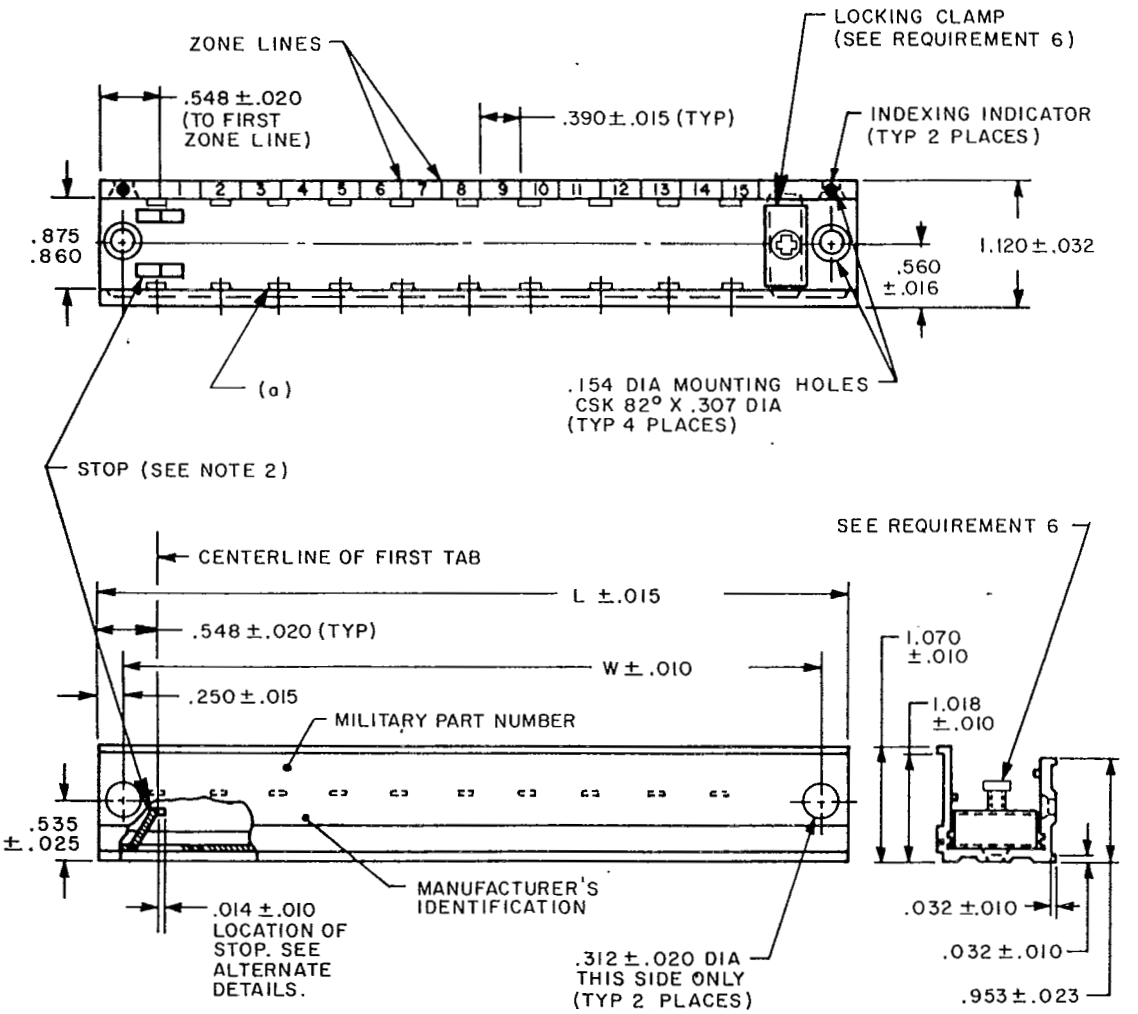



(a) CHANGE IN TAB DESIGN FROM TAPERED TO RECTANGULAR, EFFECTIVE NO LATER THAN 1 YEAR FROM DATE OF REVISION D.


AMSC N/A
FSC 5940

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

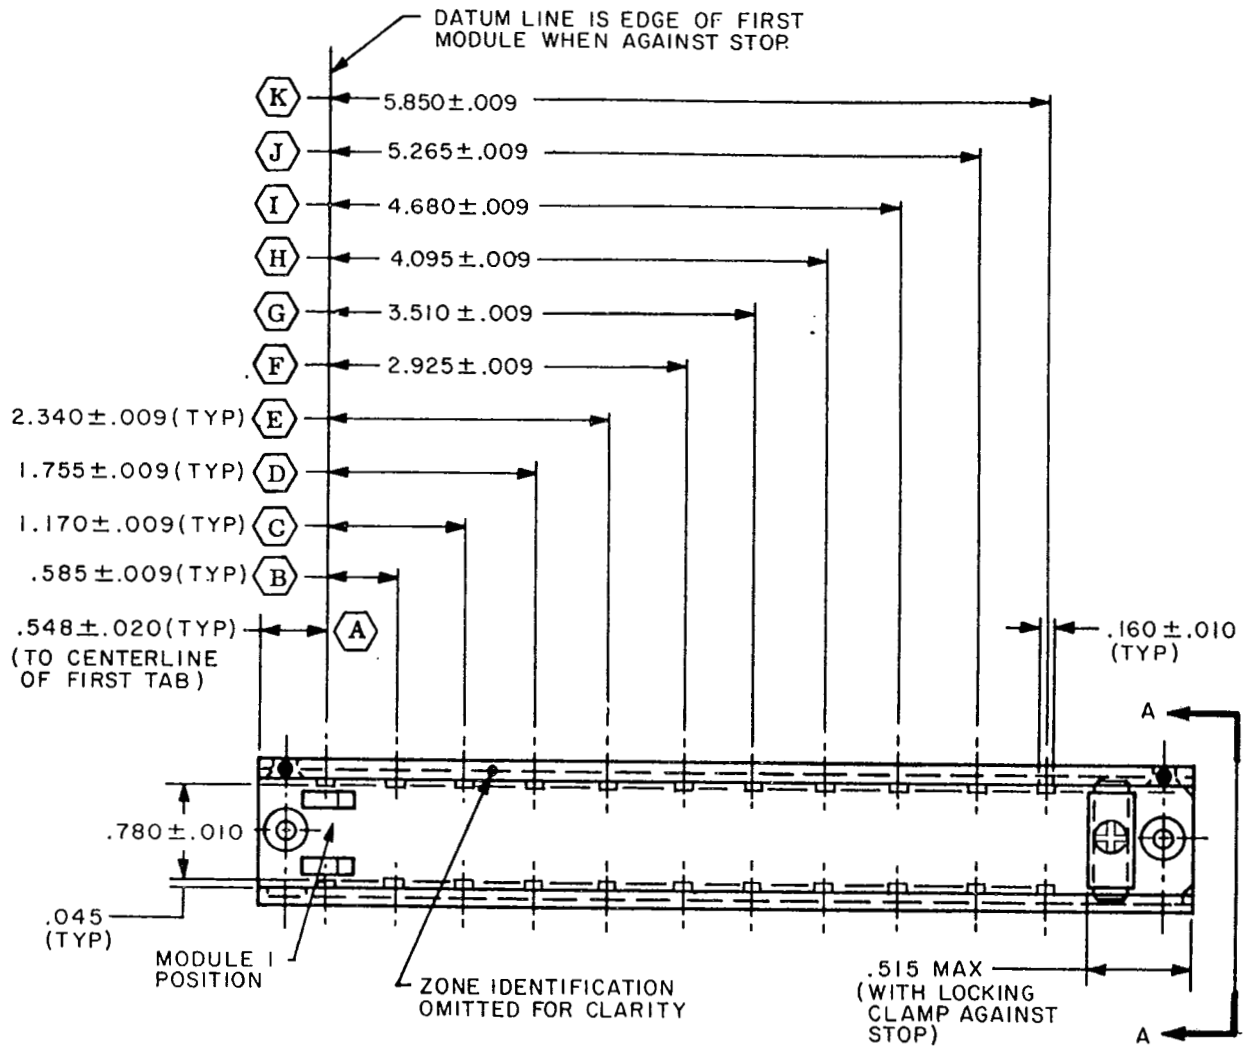

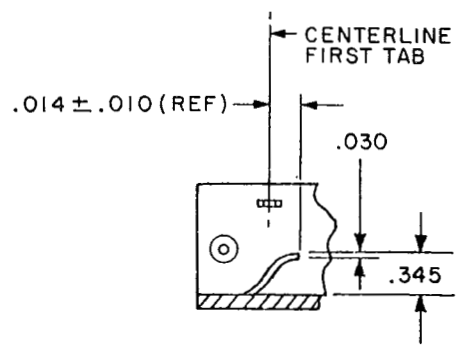

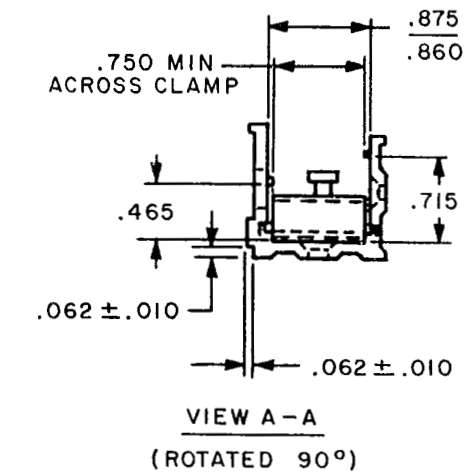

VIEW A–A
(ROTATED 90°)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

ALTERNATE DETAILS FOR MODULE STOP

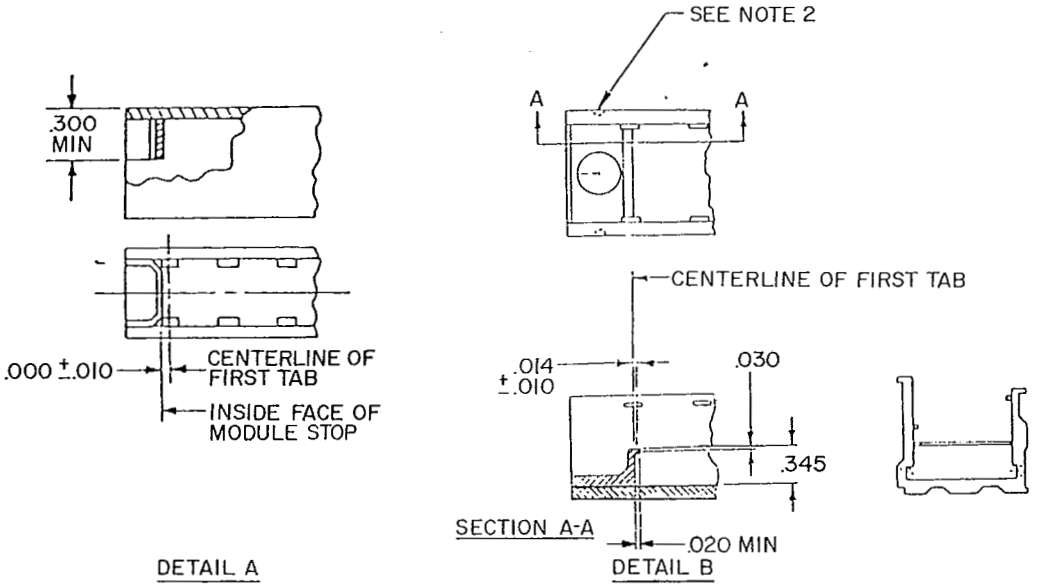


TABLE I

Dash Number	Number of Blocks 1/	L	W	Tab Location
1	10	5.291	4.791	(A) thru (G)
2	3	2.561	2.061	(A) thru (C)
3	4	2.951	2.451	(A) thru (C)
4	5	3.341	2.841	(A) thru (D)
5	6	3.731	3.231	(A) thru (E)
6	7	4.121	3.621	(A) thru (E)
7	8	4.511	4.011	(A) thru (F)
8	9	4.901	4.401	(A) thru (G)
9	11	5.681	5.181	(A) thru (H)
10	12	6.071	5.571	(A) thru (I)
11	13	6.461	5.961	(A) thru (I)
12	14	6.851	6.351	(A) thru (J)
13	15	7.241	6.741	(A) thru (K)

1/ NOTE: Number of blocks apply to the 22D, 22, 20 and 16 sizes. The number of size 12 blocks is the number shown divisible by 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

Inch	mm	Inch	mm	Inch	mm	Inch	mm
.005	0.13	.312	7.92	1.120	28.45	4.401	111.79
.009	0.23	.345	8.76	1.170	29.72	4.511	114.58
.010	0.25	.390	9.91	1.755	44.58	4.680	118.87
.014	0.36	.465	11.81	2.061	52.35	4.901	124.49
.015	0.38	.515	13.08	2.340	59.44	5.181	131.60
.016	0.41	.535	13.59	2.451	62.26	5.265	133.73
.020	0.51	.548	13.92	2.561	65.05	5.571	141.50
.025	0.64	.560	14.22	2.841	72.16	5.681	144.30
.028	0.71	.585	14.86	2.925	74.30	5.850	148.59
.030	0.76	.715	18.16	2.951	74.96	5.961	151.41
.032	0.81	.750	19.05	3.231	82.07	6.071	154.20
.045	1.14	.780	19.81	3.341	84.86	6.351	161.32
.062	1.57	.860	21.84	3.510	89.15	6.461	164.11
.154	3.91	.870	22.10	3.621	91.97	6.741	171.22
.161	4.09	.875	22.23	3.731	94.77	6.851	174.02
.250	6.35	.966	24.54	4.011	101.88	7.241	183.92
.300	7.62	1.018	25.86	4.095	104.01		
.307	7.80	1.070	27.18	4.121	104.67		

REQUIREMENTS:

1. MATERIALS:

   Rack and locking clamp; aluminum alloy 6063, temper T5 in accordance with QQ-A-200/9 or stainless steel in accordance with QQ-S-766.

2. FINISH: Aluminum parts shall be anodic coated in accordance with MIL-A-8625, Type II, Class 2, black. Stainless steel parts shall be passivated in accordance with QQ-P-35.

3. The rack shall be designed for installation of MIL-T-81714/1 thru /4 and /17 thru /20 and /25 blocks.

4. Zone numbers and zone lines shall be white.

5. Rack to be free of all burrs and sharp edges .015R max.

6. Locking clamp shall be designed to be permanently retained in rack. The locking clamp screw shall be cross recessed in accordance with MS9006, 8-32UNC-2A x .500, corrosion-resistant steel, passivated, self-locking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. Unless otherwise specified, dimensions in inches, tolerances: decimals ±.005.

2. Stop design optional. See details A and B.

3. The part number consists of the letter M, specification sheet number, and a dash number from Table I. When parts are made from aluminum, add no letter after the dash number. When parts are made from stainless steel, add an S after the dash number.

M 81714/5 - **

- ** — Dash Number.
- 81714/5 — Specification Sheet Number.
- M — Military Part Number Indicator.

Part number example:

M81714/5-1

Feedback type rack assembly dash number.

4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

5. International interest, see specification MIL-T-81714.

6. Locking clamp shall be designed to be permanently retained in rack. The locking clamp screw shall be cross-recessed in accordance with MS9006, 8-32UNC-2A x .500, corrosion-resistant steel, passivated, self-locking or equivalent.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Navy - AS
(Project No. 5940-1000-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.