INCH-POUND


MIL-B-18/275A
6 September 1988
SUPERSEDING
MIL-B-18/275
28 March 1980

MILTARY SPECIFICATION SHEET

BATTERY, DRY, BA-1425/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the battery described herein shall consist of this specification and the latest issue of MIL-B-18.

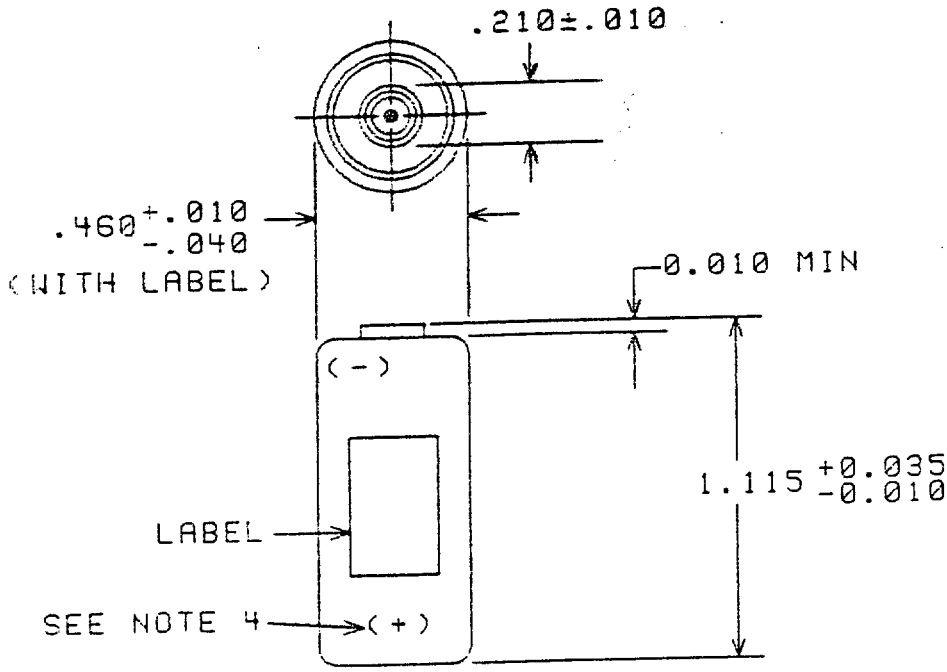

INCHES	MM
.010	.25
.035	.89
.040	1.02
.210	5.33
.460	11.68
1.115	28.32

FSC 6135

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:59Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Metric equivalents are for general information only and are based upon 1 inch = 25.4 millimeters.
3. This cell (MP401) shall be made with a suitable dialysis cell membrane barrier material, and shall be sealed with a polyethylene seal or equal.
4. Only the positive marking is required to be shown at the bottom of the cell.

REQUIREMENTS:

Dimensions and configuration: See figure.
Nominal voltage: 1.4 volts.
Number and type of cell: 1 "MP401".
Terminals: Flat surface
Weight (maximum): 0.45 ounce

Capacity Tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be as specified herein.

Type of Test	Minimum Capacity Requirement (Hrs.)
D	26
T	26

First Article inspection:

Visual and mechanical (external and internal).
Battery voltage.
Electrolyte leakage.
Capacity, D (without storage).

Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Electrolyte leakage.
Capacity, D and T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:59Z
Check the source to verify that this is the current version before use.

Methods of examination and tests:

Capacity tests - See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - The battery shall be discharged through 50 ohms continuously to a test-end voltage of 0.9 volt.

Electrolyte leakage - The battery shall be discharged through 15 ohms for 24 hours.

Closed circuit voltage - Use TS-183()/U test per special marking, or with minimum permissible voltage specified for TS-183()/U. Use a load resistance value of 19.80 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183()/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
4	1.00 Volt

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - SH
Air Force - 99

Preparing Activity:
Army - ER

(Project 6135-0220)

Review Activities:
Navy - SH

User Activities:
Army-AT

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:59Z
Check the source to verify that this is the current version before use.