
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-1082/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

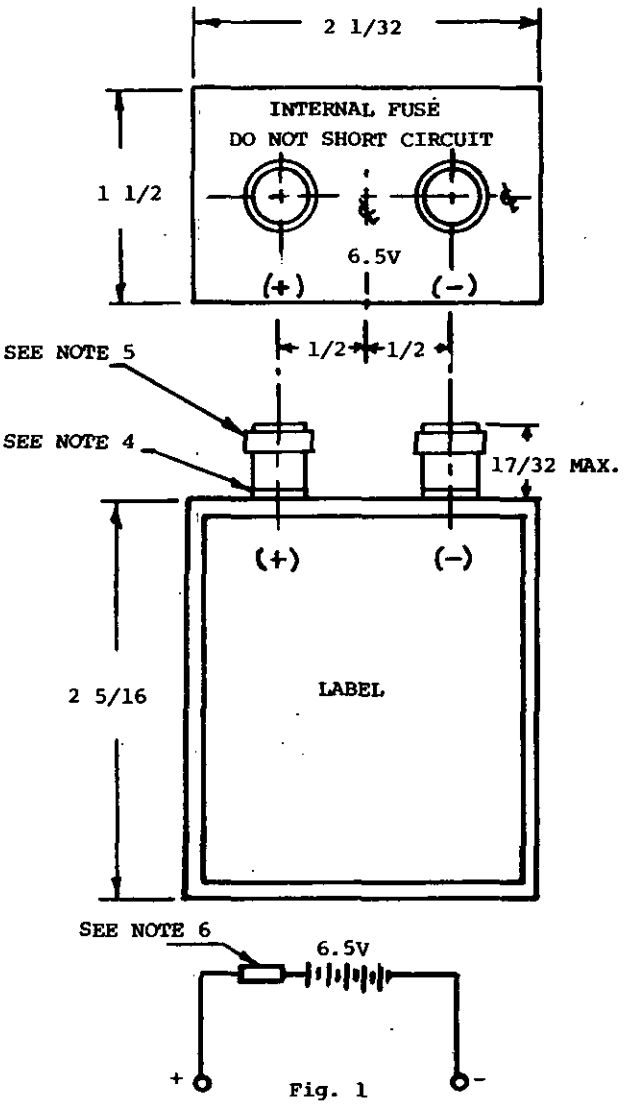

INCHES	MM
17/32	13.49
1/2	12.7
1 1/2	38.1
2 1/32	51.59
2 5/16	58.74

Fig. 1

NOTES:

1. The cells making up the battery shall be made with a suitable dialysis all-membrane barrier, or equivalent, and shall be sealed with a Mylar seal, or equivalent.

Ⓐ denotes changes

FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:59Z
Check the source to verify that this is the current version before use.

NOTES:

2. All dimensions are in inches. Unless otherwise specified, fraction tolerances are ± 1/16 inch and decimal tolerances ± 0.015 inch. Tolerances of 1/2 inch dimensions shall be ± 1/132 inch.

3. Polarity markings shall be as indicated in Fig. 1.

4. Washers shall be external tooth, star washer, phosphor bronze, for NR-8 screw in accordance with MS 16213B.

5. Terminals shall be stud and knob type. Knobs shall be plastic insulated knurled, with brass insert, 8-32 ASME in accordance with MIL-P-55149. Maximum height dimension applies when knob is in tightened position.

6. Fuse shall be ampere "SLO BLO" in accordance with MIL-F-15160.

REQUIREMENTS:

Dimensions and configuration:

Nominal voltage: 6.5 volts.

Usual number and type of cells: 5-R12R.

Usual cell connection: Series.

Terminals: 2 insulated knurled knobs.

Weight (Maximum): 8.5 ounces (241 grams).

(A) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(A) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(A) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:59Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - The battery shall be discharged through 100 ohms continuously to a test-end voltage of 4.5 volts.

Closed circuit voltage - Use TS-183( )/U per special marking or with minimum permissible voltage specified for TS-183( )/U. Use a load resistance value of 34.88 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
8	5.00 volts

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER

Preparing activity:
Army - ER

Review activities:

Project Number: (6135-0155-95)

User activities:

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:59Z
Check the source to verify that this is the current version before use.