INCH-POUND

MIL-B-18/277(AS)
3 May 1989

MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, DRY

This specification is approved for use within the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the dry, non-rechargeable battery described herein shall consist of this specification and the latest issue of MIL-B-18.

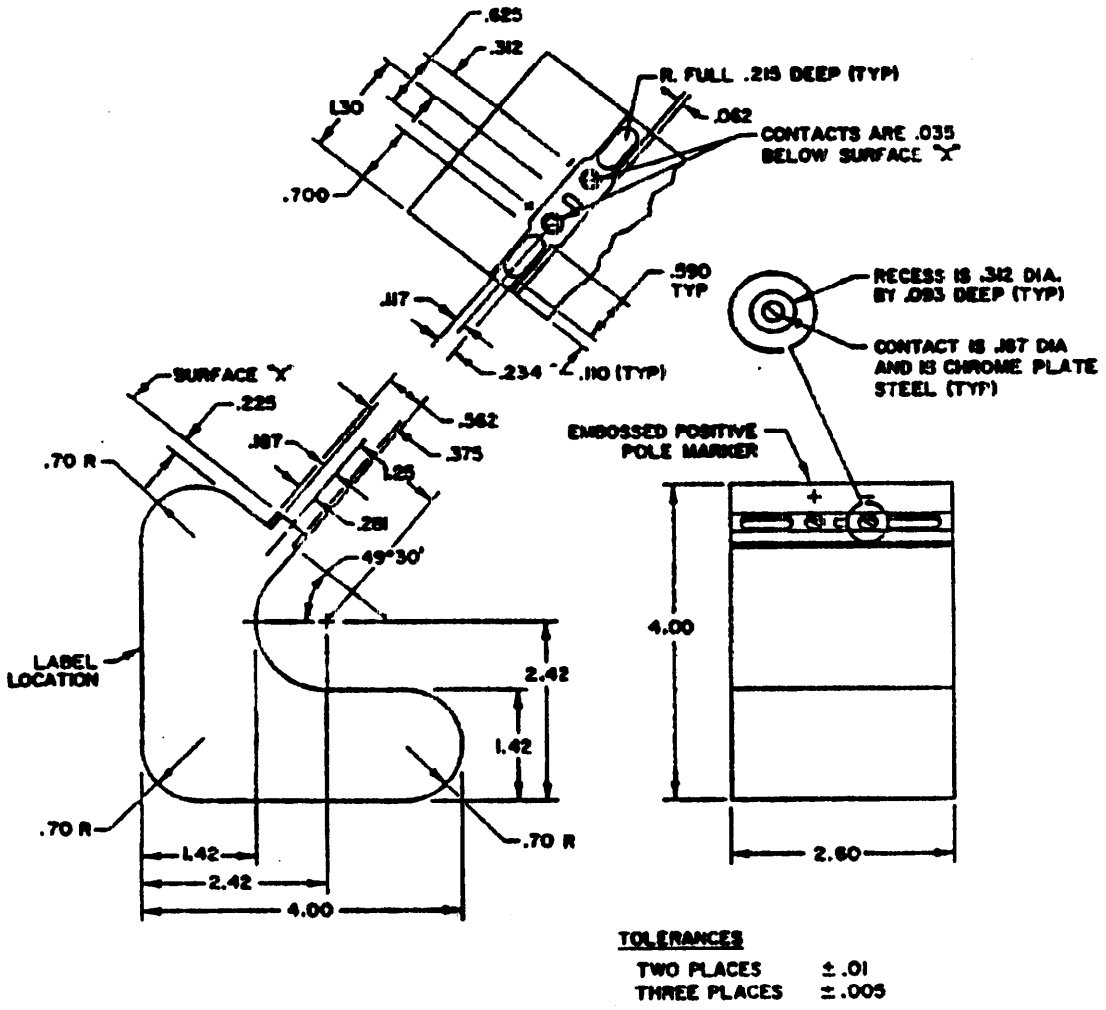


FIGURE 1. Battery.

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-15T17:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part numbers: M18/277-1 for normal temperature operation.
   M18/277-2 for cold temperature operation.

2. Dimensions and configuration: See Figure 1.

3. Electrochemical cell material (optional): If lithium cells are used, they shall be in accordance with NAVSEAINST 9310.1B.

4. Maximum open-circuit voltage: 15.0 volts.

5. Minimum closed-circuit voltage: 10.0 volts under 13.6 ohm load.

6. Terminals: 2 contacts, flat surface terminals.

7. Weight (maximum): 2.5 lbs (1.135 Kg).

8. Battery rating: M18/277-1: 5.0 ampere-hours at 35°F.
   M18/277-2: 5.0 ampere-hours at -4°F.

9. Storage life: M18/277-1: 2 year D and T test.
   M18/277-2: 5 year D and T test.

10. Capacity tests for normal temperature operation: When the battery is tested in accordance with the methods of examination and tests of their specification, the minimum capacity test requirements shall be as specified below:

Capacity Test	Discharge Temperature	Battery Capacity Requirements in Hours to 10.0 Volts
D	+70°F	5.0
T	+113°F	5.0

11. Capacity tests for cold temperature operation: The battery shall be stored at -20°F ± 3°F for a minimum of sixteen (16) hours. It shall then be discharged at -4°F for five (5) hours. The minimum voltage after discharge shall be 10.0 volts under 13.6 ohm load.

12. Methods of examinations and tests:

    Capacity tests:

    (1) Storage: The specified storage duration for both D and T capacity tests shall be as follows:

        M18/277-1: 2 years
        M18/277-2: 5 years

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:00Z
Check the source to verify that this is the current version before use.

(2) Discharge: The battery shall be discharged through a 13.6 ohm load to a test end on-load voltage of 10.0 volts, after which the battery shall be disconnected from the load.

13. Battery safety: If lithium cells are used, battery safety shall conform to NAVSEAINST 9310.1B, "Responsibilities and Procedures for the Naval Lithium Battery Safety Program."

NOTES:

1. All dimensions shown are in inches.

2. The color of exposed surfaces of jackets shall match one of the following lusterless greens: 34079, 34086, 34087, 34096, 34102, 34127 and 34128 per FED-STD-595.

3. Label: The label shall be applied as shown in Figure 1 and contain the following information as a minimum:

15V BATTERY, NON-RECHARGEABLE, (Type)

Type Designation
National Stock Number
(Contract Number)
Serial Number
Date of Manufacture
Manufacturer's name
Manufacturer's plant

CAUTION: DO NOT CHARGE, SHORT CIRCUIT, INCINERATE, EXPOSE TO TEMPERATURES ABOUT 70°C OR MUTILATE THIS BATTERY IN ANY WAY.

4. Intended use: The battery covered by this specification is intended to provide power to the CQK-2/P Tactical Ventilator, P/N 1507674, a component of the A/P22P-9(V), Protective Assembly, Helicopter Aircrewman, Chemical, Biological, Radiological (CBR).

Preparing activity:
Navy - AS
(Project No. 6135-N191)

Source: https://assist.dla.mil -- Downloaded: 202610-15T17:00Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:00Z
Check the source to verify that this is the current version before use.