MIL-C-27027(USAF)
AMENDMENT 3
15 February 1989
SUPERSEDING
AMENDMENT 2
12 March 1962

MILITARY SPECIFICATION

CLIP-IN SUBASSEMBLY MHU-29/C

This amendment forms a part of Military Specification MIL-C-27027(USAF), dated 20 December 1961, and is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

*Under CLIP-IN SUBASSEMBLY MHU-29/C, delete "MHU-29/C" and substitute "MHU-29A/C".

*1. Line 2 delete "MHU-29/C" and substitute "MHU-29A/C".

*2. Under SPECIFICATIONS Military delete and substitute:

delete:	"JAN-P-100	Packaging and Packing for Overseas Shipment, General Specification
	MIL-C-5015	Connectors, Electric, "AN" Type
	MIL-W-5088	Wiring, Aircraft, Installation of
	MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
	MIL-C-5424	Cable, Steel (Corrosion Resisting) Flexible, Preformed (For Aeronautical Use)
	MIL-E-7080	Installation of Aircraft Electrical Equipment
	MIL-I-8500	Interchangeability and Replaceability, Physical, of Component Parts of Aircraft
	MIL-A-8591	Airborne Stores and Associated Suspension Equipment; General Design Criteria For

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

MIL-T-9107	Test Reports, Preparation of
MIL-C-13777	Cable, Special Purpose, Electrical
MIL-C-25200	Cable Assemblies, Special Weapons, Electrical, General Requirements For"

substitute:

"MIL-C-5015	Connector, Electrical, Circular, Threaded, AN Type, General Specification For
MIL-W-5088	Wiring, Aerospace Vehicle
MIL-E-7080	Electric Equipment, Aircraft, Selection and Installation of
MIL-I-8500	Interchangeability and Replaceability of Component Parts for Aircraft and Missiles
MIL-A-8591	Airborne Stores, Suspension Equipment and Aircraft-Store Interface (Carriage Phase); General Design Criteria For
MIL-C-13777	Cable, Special Purpose, Electrical, Conductors General Specification For
MIL-I-23659	Initiator, Electric, General Design Specification
MIL-C-25200	Cable Assembly, Special Weapon, Electrical, General Requirement For
MIL-W-83420	Wire, Rope, Flexible, For Aircraft Control"

*2. Under STANDARDS Military delete and substitute:

delete: "MS-33586 Metals, Definition of Dissimilar"

substitute:

"MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-831	Test Reports, Preparation of
MIL-STD-889	Dissimilar Metals
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; With Appropriate Test Methods"

*2. Under PUBLICATIONS delete:

"Air Force Design Manuals

80-1	Handbook of Instructions For Aircraft Designers"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

*2. Under DRAWINGS Air Force delete and substitute:

delete: "61J14600 Clip-In Subassembly MHU-29/C
61J14605 Cutter, Cable, Clip-In Subassembly"

substitute: "69J35452 Clip-In Subassembly MHU-29A/C
64D13055 Cutter, Cable, Clip-In Subassembly
61D14686 Cable Assembly, Special Purpose, Electrical CX-7774/U"

*2. Under NOTE line 2 delete "61J14600" and substitute "69J35452".

*2. Under Boeing Airplane Company delete "25-12537" and substitute "35-23749".

*3.2 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

PAGE 3

*3.2 On line e under Drawing Number delete "61J14605" and substitute "64D13055".

3.2 Add line h under MAJOR PARTS:

"h. Cable Assembly Special Purpose Electrical CX-7774/U 61D14686 1

NOTE: This item may be either Government furnished, or Contractor furnished equipment (see 6.4)."

*3.4 On line 1 delete "MHU-29/C" and substitute "MHU-29A/C".
On line 3 delete "61J14600" and substitute "69J35452".

*3.4.1 delete and substitute:

"3.4.1 DISSIMILAR METALS IN CONTACT. Dissimilar metals in contact as defined by MIL-STD-889 shall be protected from corrosion in accordance with the applicable provisions."

*3.5.1 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

PAGE 7

Figure 4 delete and substitute attached page 7, figure 4.

PAGE 8

*3.5.5.6 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

*3.6 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

PAGE 9

*3.6.3 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

*3.9 GOVERNMENT-LOANED PROPERTY, under Part Number delete "25-12537" and substitute "35-23749".

PAGE 11

*3.11 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

*4.1 Line 2 Delete "MHU-29/C" and substitute "MHU-29A/C".

*4.2.1 Line 2 delete "MHU-29/C" and substitute "MHU-29A/C".

*4.2.1.1 Line 4 delete "MIL-T-9107" and substitute "MIL-STD-831".

PAGE 13

*4.5.1 Change end of line 2 to read: "pass the tests of MIL-C-27029 and MIL-I-23659".

PAGE 22

*4.6.4.2 Line 2 delete "58C46552 and 61J14605" and substitute "58C46522 and 64D13055".

*4.6.5.1 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

*4.6.5.2 Line 2 delete "Procedure I of MIL-E-5272" and substitute "Method 509.2 of MIL-STD-810".

PAGE 23

*4.6.5.3 Delete and substitute:

"4.6.5.3 VIBRATION. The subassembly with test load shall be subjected to a sine vibration test in accordance with Procedure XII of MIL-E-5272 and a random vibration test in accordance with Category 10, Method 514.3 of MIL-STD-810. For the sine vibration test, the range of frequencies and vibratory accelerations shown in figure 10 shall apply in lieu of figure 1 of MIL-E-5272. For the random vibration test, the range of frequencies and vibratory accelerations shown in figure 514.3-36 shall apply. The test shall be conducted in two parts:

a. The release mechanism shall be unlocked and fired at the completion of the resonance frequency vibration test while the unit is being vibrated at resonant frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

b. The release mechanism shall be unlocked and fired subsequent to the completion of the vibration tests."

*4.6.6 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

PAGE 25

*5.1 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

*5.3 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".
Line 3 delete "JAN-P-100" and substitute "MIL-STD-1186".

*5.4 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

*5.5 Delete "CLIP-IN SUBASSEMBLY MHU-29/C" and substitute "CLIP-IN SUBASSEMBLY MHU-29A/C".

*6.1 Line 1 delete "MHU-29/C" and substitute "MHU-29A/C".

6.4.2 Add the following paragraph:

"6.4.2 CABLE, SPECIAL PURPOSE, ELECTRICAL CX7774/U. The invitation for bids, contract, or purchase order should specify whether this item shall be Government furnished or Contractor furnished equipment."

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment."


Custodian:
Air Force - 79

Reviewer:
Air Force - 15

Preparing Activity:
Air Force - 79

(Project 1190-F018)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

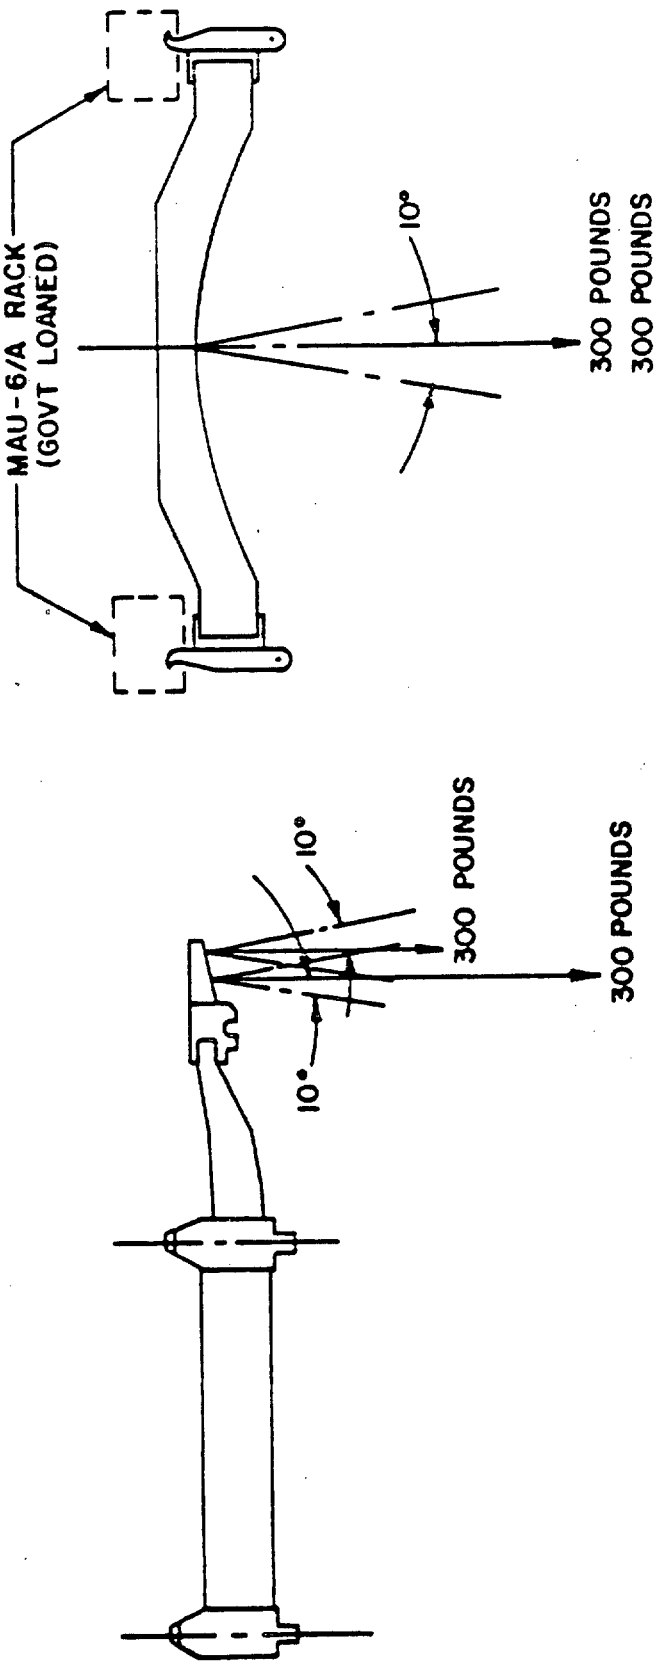

LIMIT LOADS TO BE APPLIED INDIVIDUALLY

LOAD ACT IN ANY DIRECTION IN AN ANGLE OF 10° WITH VERTICAL

FIGURE 4 STRUCTURAL LIMIT LOADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.