MILITARY SPECIFICATION

CLIP-IN SUBASSEMBLY MHU-29/C

1. SCOPE. This specification covers equipment designated as Clip-In Subassembly MHU-29/C. The Clip-In Subassembly shall be a quick-loading device capable of retaining one special weapon in a bomb bay without possibility of inadvertent release, and of releasing it without possibility of inadvertent retention.

2. APPLICABLE DOCUMENTS. The following documents of the issue in effect on the date of invitation for bids form a part of this specification.

SPECIFICATIONS

Federal

PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner

Military

JAN-P-100	Packaging and Packing for Overseas Shipment, General Specification
MIL-P-116	Preservation, Methods Of
MIL-C-5015	Connectors, Electric, "AN" Type
MIL-W-5088	Wiring, Aircraft, Installation Of
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-C-5424	Cable, Steel (Corrosion Resisting) Flexible, Preformed (For Aeronautical Use)
MIL-E-7080	Installation of Aircraft Electrical Equipment
MIL-I-8500	Interchangeability and Replaceability, Physical, of Component Parts of Aircraft
MIL-A-8591	Airborne Stores and Associated Suspension Equipment; General Design Criteria For
MIL-T-9107	Test Reports, Preparation Of
MIL-C-13777	Cable, Special Purpose, Electrical
MIL-C-25200	Cable Assemblies, Special Weapons, Electrical, General Requirements For
MIL-C-27029	Cartridge, Bomb Ejection MLU-11/C and Cartridge Kit, Bomb Ejection MLU-12/C

Source: https://assist.dla.mil -- Downloaded: 20260410-20T10:38Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MS-33586	Metals, Definition of Dissimilar

PUBLICATIONS

Air Force Design Manuals

80-1	Handbook of Instructions for Aircraft Designers

DRAWINGS

Air Force

61J14600	Clip-In Subassembly MHU-29/C
61J14605	Cutter, Cable, Clip-In Subassembly
61D14650	Cartridge Kit, Bomb Ejection MLU-12/C
61D14651	Cartridge, Bomb Ejection MLU-11/C

NOTE: All Air Force drawings listed in this specification and not listed in 2. are subsidiary to 61J14600.

Boeing Airplane Company

25-12537	Rack - MAU-6/A

(Copies of specifications, standards, drawings, and publications required by bidders or contractors in connection with specific fabrication or procurement functions shall be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 PREPRODUCTION. This specification makes provisions for preproduction testing.

3.2 MAJOR PARTS. The Clip-In Subassembly MHU-29/C shall consist of the following major parts, in the quantities indicated.

	Part	Drawing Number	Quantity
a.	Support	61J14601	1
b.	Support Truss	61J14583	2

Source: https://assist.dla.mil -- Downloaded: 20261O-20T10:38Z
Check the source to verify that this is the current version before use.

Part	Drawing Number	Quantity
c. Band Assembly	61J14602	2
d. Sway Brace	61J14568	1
e. Cable Cutter	61J14605	1
f. Pullout Cable Bracket	61D14591	1
g. Switch Housing Assembly with Lock, Unlock and Separation Switches	61J14608	1

3.3 MATERIAL. Material shall be selected and processed for the various parts in accordance with the applicable specifications and standards as indicated on the drawings.

3.4 DESIGN AND CONSTRUCTION. The Clip-In Subassembly MHU-29/C shall be designed and constructed in strict accordance with AF drawing 61J14600 and all subsidiary detail drawings, and shall effect support of the weapon, its release, protection against inadvertent release, monitoring and release circuitry, and connections to the weapon.

3.4.1 DISSIMILAR METALS IN CONTACT. Dissimilar metals, as defined by MS-33586, in contact shall be protected from corrosion in accordance with the applicable provisions and references of Air Force Design Manual 80-1 (HIAD), Volume I.

3.4.2 INTERCHANGEABILITY. All subassemblies shall be interchangeable. All components shall be replaceable as defined in MIL-I-8500. All permanently joined members shall be interchangeable or replaceable in their joined state.


3.5 GENERAL STRUCTURAL CRITERIA

3.5.1 STRUCTURAL LOADS. The MHU-29/C shall be capable of withstanding the structural loads specified in figures 1, 2, 3 and 4, and of transmitting these loads to the clip-in points of the MAU-6/A Rack.

3.5.2 LIMIT LOAD. Unless otherwise noted, the loads specified herein are limit loads.

3.5.3 YIELD FACTOR OF SAFETY. The minimum yield factor of safety shall be 1.15. There shall be no permanent set as defined by MIL-A-8591.

Source: https://assist.dla.mil -- Downloaded: 20260-20T10:38Z
Check the source to verify that this is the current version before use.

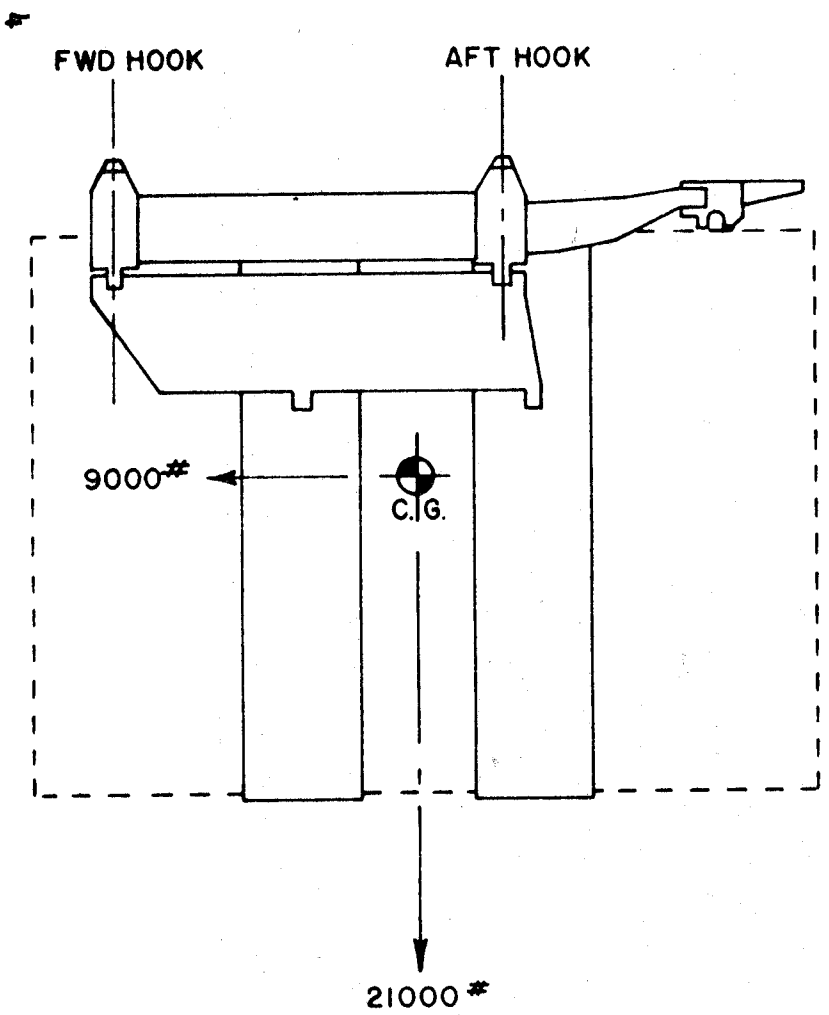

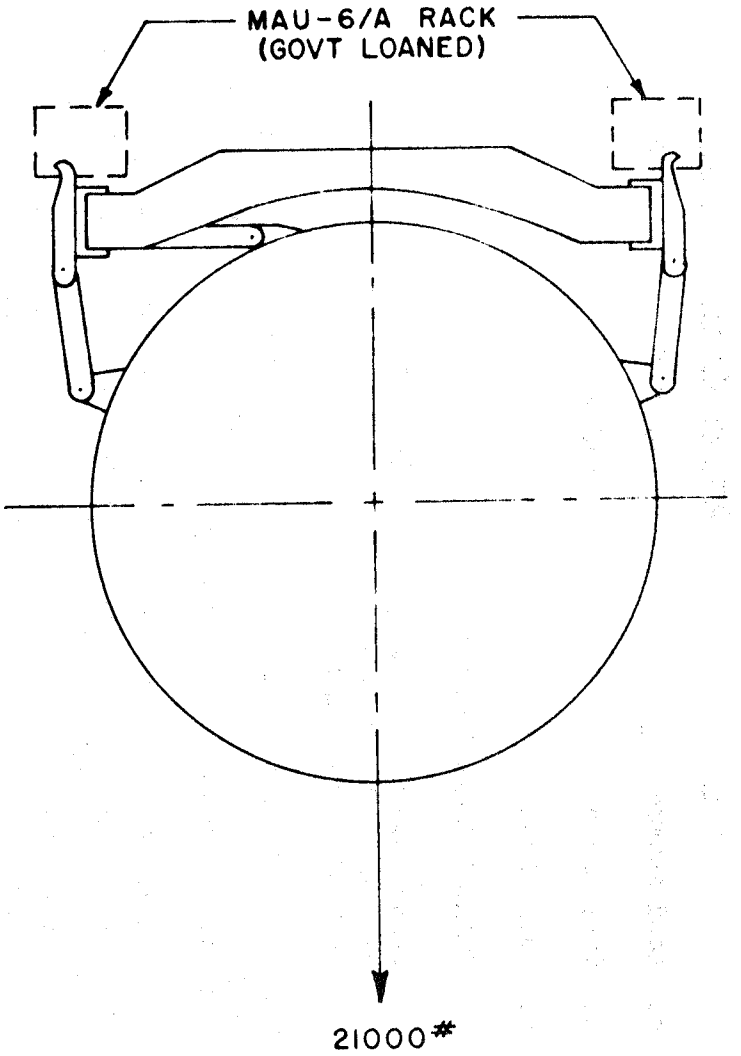
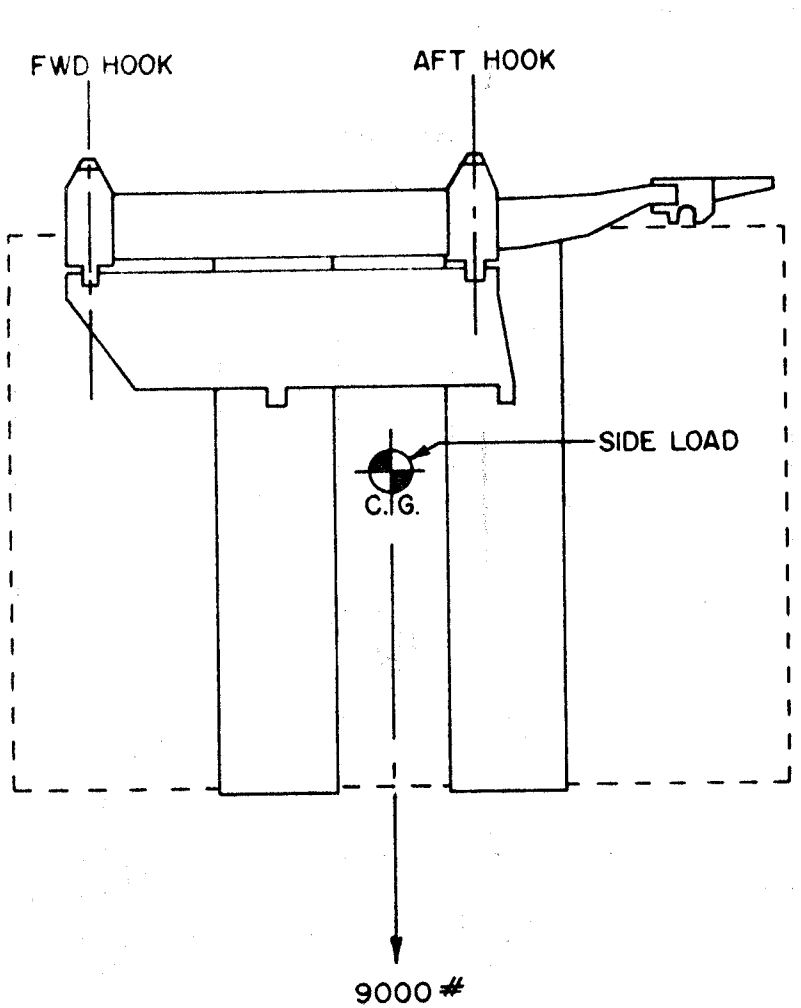


FIGURE 1 STRUCTURAL LIMIT LOADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.



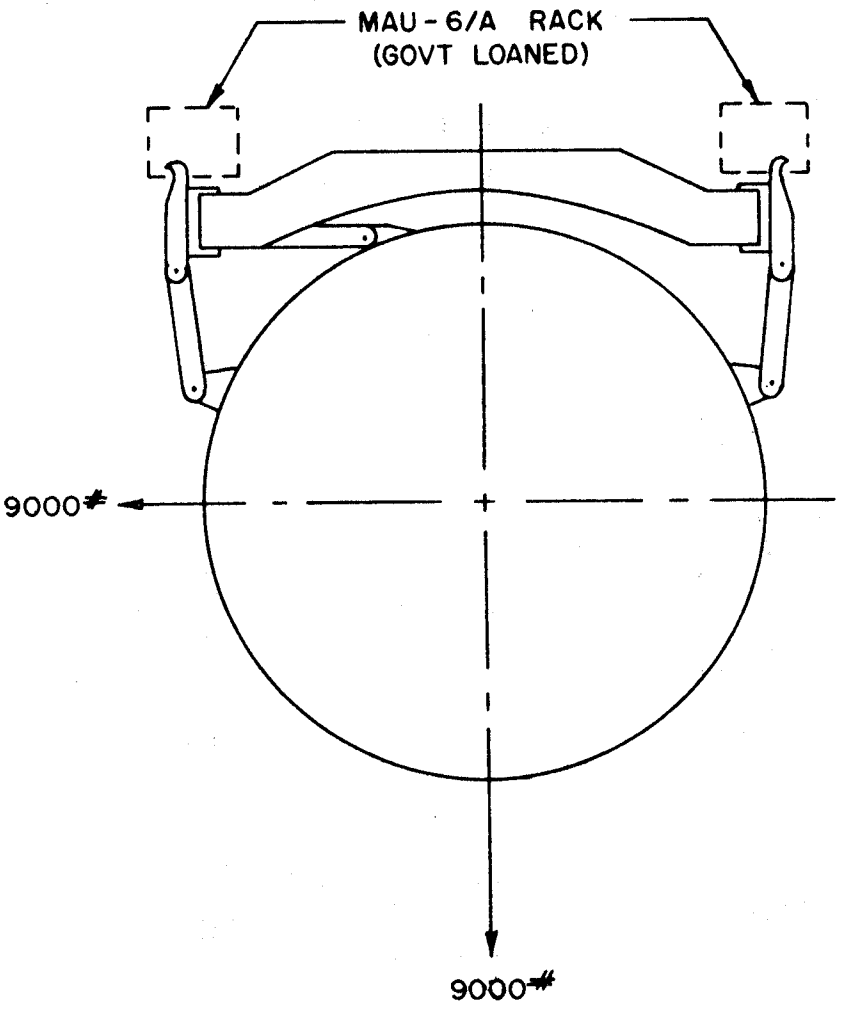
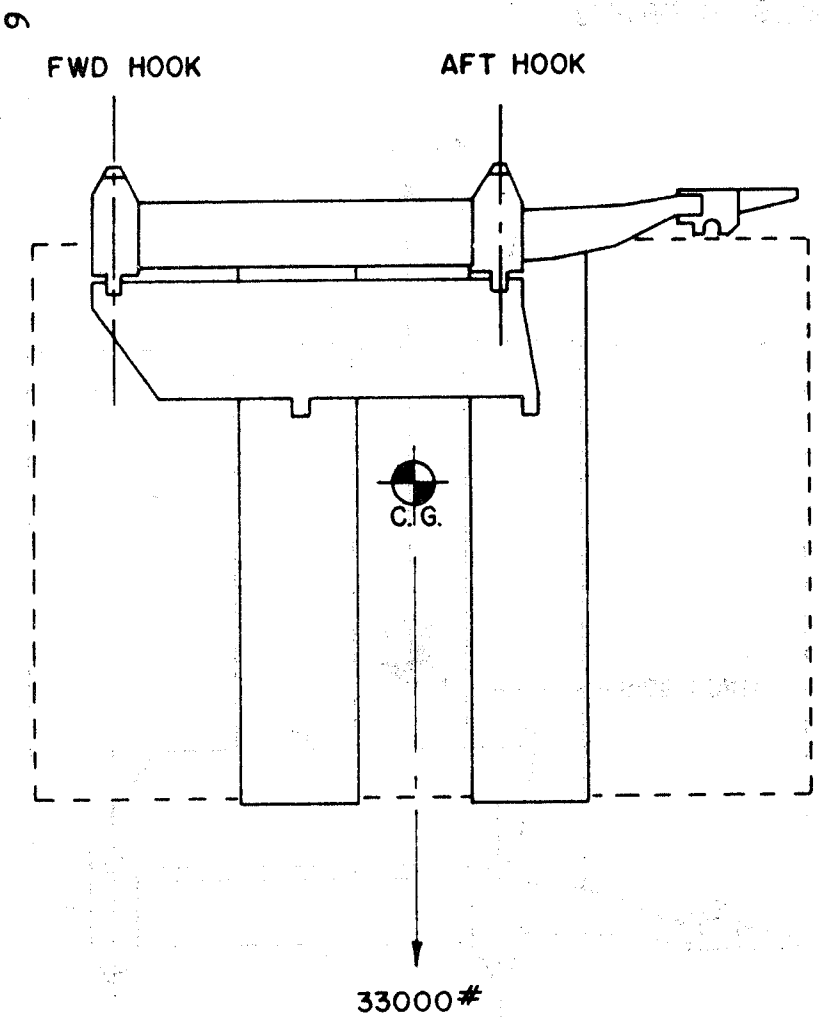


FIGURE 2 STRUCTURAL LIMIT LOADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.





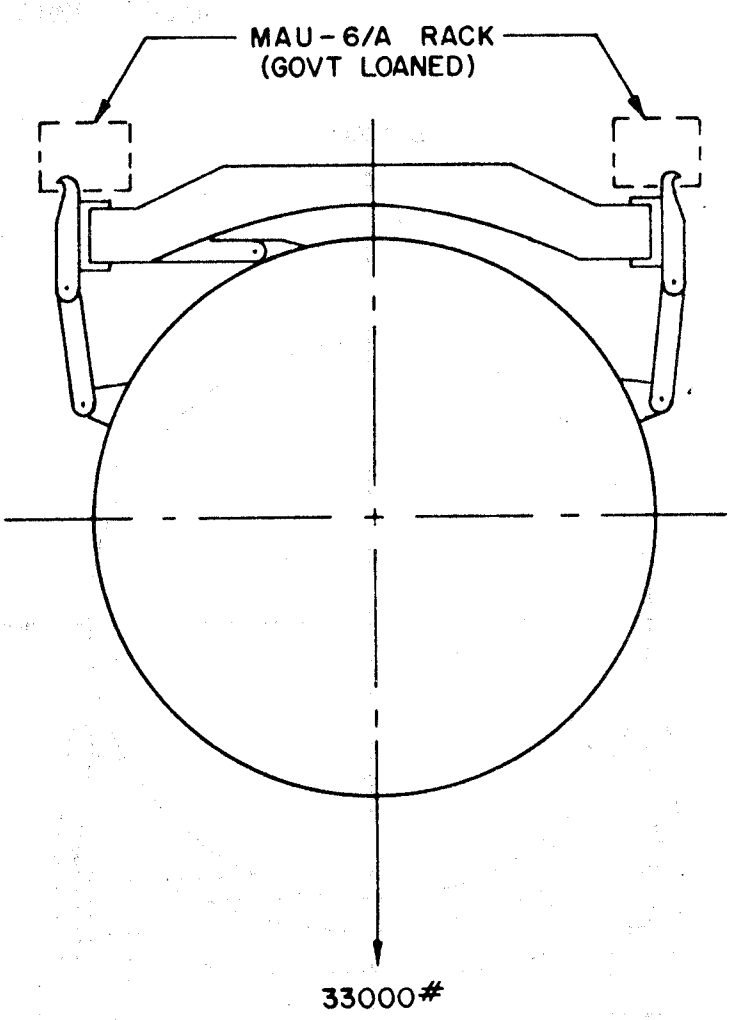


FIGURE 3 STRUCTURAL LIMIT LOADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

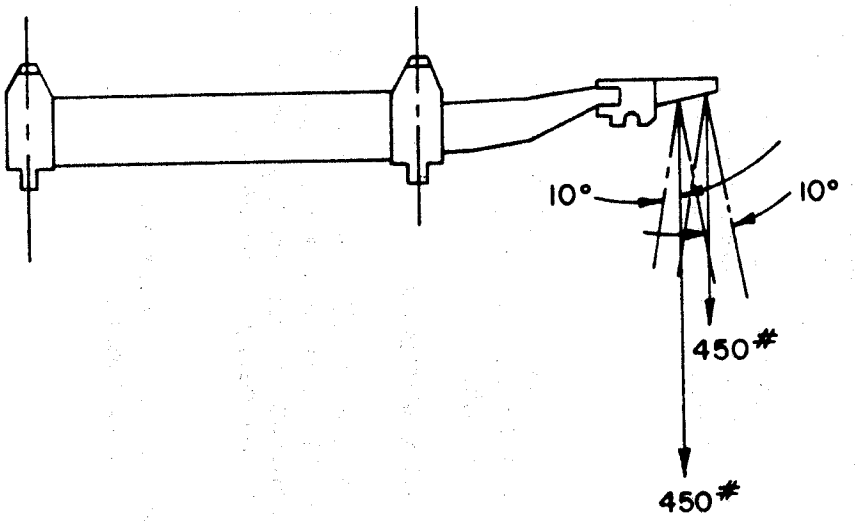

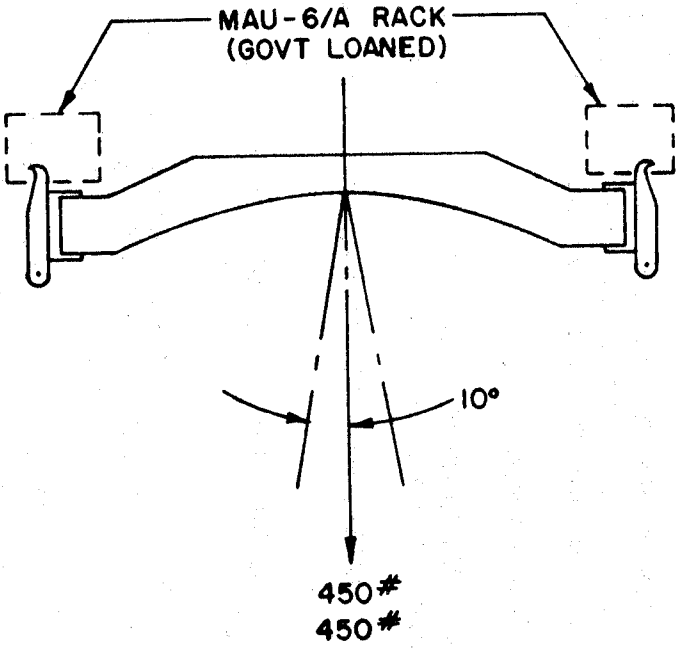

LOAD ACT IN ANY DIRECTION IN AN ANGLE OF 10° WITH VERTICAL

MIL-C-27027(USAF)

7

FIGURE 4 STRUCTURAL LIMIT LOADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

3.5.4 ULTIMATE FACTOR OF SAFETY. The minimum ultimate factor of safety shall be 1.50. Failure shall not occur when loads which are 1.50 times the limit load are applied. (Permanent set permissible.)

3.5.5 ELECTRICAL REQUIREMENTS

3.5.5.1 ELECTRICAL INSTALLATION. Electrical equipment shall be installed in accordance with MIL-E-7080.

3.5.5.2 ELECTRICAL CONNECTORS. Electrical connectors shall be in accordance with MIL-C-5015.

3.5.5.3 ELECTRICAL WIRING. Electrical wiring shall be in accordance with MIL-W-5088.

3.5.5.4 ELECTRICAL CABLES. Electrical cables shall conform to the requirements of MIL-C-13777, MIL-C-25200 and applicable detail drawings. In the event of conflict, MIL-C-25200 shall apply.

3.5.5.5 ELECTRICAL WIRE NUMBERS. Electrical wires shall be marked with "AY" and "TZA" prefixes, as specified on the drawings.

3.5.5.6 The MHU-29/C shall fulfill all the operating requirements specified herein, when operating under any voltage from 18 to 30 volts dc.

3.6 PERFORMANCE. The Clip-In Subassembly MHU-29/C shall be suitable for use under adverse environmental conditions including salt water atmosphere and vibration, and shall meet the following performance requirements.

3.6.1 FUNCTIONAL

3.6.1.1 ELECTRICAL FUNCTIONAL REQUIREMENTS. The electrical performance requirements shall be in accordance with the Electrical Functional Tests of this specification.

3.6.1.2 MECHANICAL LOCK MECHANISM

3.6.1.2.1 Rotation of the manual lock crank, drawing 58C46522, through 43 degrees shall fully unlock the cable cutter. The vertical downward load required on the bearing pad of the crank to operate the lock mechanism to the fully unlocked position shall be 30 pounds or less.

3.6.1.2.2 The mechanical lock mechanism shall be capable of reversible actuation under limit loads.

Source: https://assist.dla.mil -- Downloaded: 20261-20T10:38Z
Check the source to verify that this is the current version before use.

3.6.1.2.3 The mechanical lock mechanism shall not allow the weapon to be released when the MLU-11/C Cartridges have been inadvertently fired.

3.6.2 RELEASE TIME. The release mechanism shall release within 55 milliseconds after the electrical release signal is received at the cartridge. The bands shall release within 5 milliseconds of each other.

3.6.3 RELEASE. The MHU-29/C shall be capable of 10 consecutive successful weapon releases. During the release cycle all portions of the subassembly shall remain within the envelope defined by figure 5.

3.7 ENVIRONMENTAL REQUIREMENTS. The subassembly shall be capable of satisfactory operation after being exposed to the following environmental conditions:

a. Salt atmosphere likely to be encountered in storage or transportation near a body of salt water.

b. Vibration likely to be encountered in flight, handling or transportation.

3.8 IDENTIFICATION OF PRODUCT. Identification shall be in accordance with the requirements of MIL-STD-130.

3.9 GOVERNMENT-LOANED PROPERTY. The following items of equipment shall be loaned to the contractor, upon his request, as Government-loaned property, for the purpose of conducting the tests specified in section 4:

Item Number	Stock Number	Part Number	Item Description	Quantity
1		25-12537 (Boeing Airplane Company)	Rack, Clip-In System MAU-6/A	As Required (See notes)
2		61J13104	Jack Kit, Hydraulic, Hand KMU-128/E	1

3.10 GOVERNMENT-FURNISHED PROPERTY. The following items of equipment shall be furnished the contractor, upon his request, as Government-furnished property for conducting the tests specified in section 4:

Source: https://assist.dla.mil -- Downloaded: 20261-20T10:38Z
Check the source to verify that this is the current version before use.

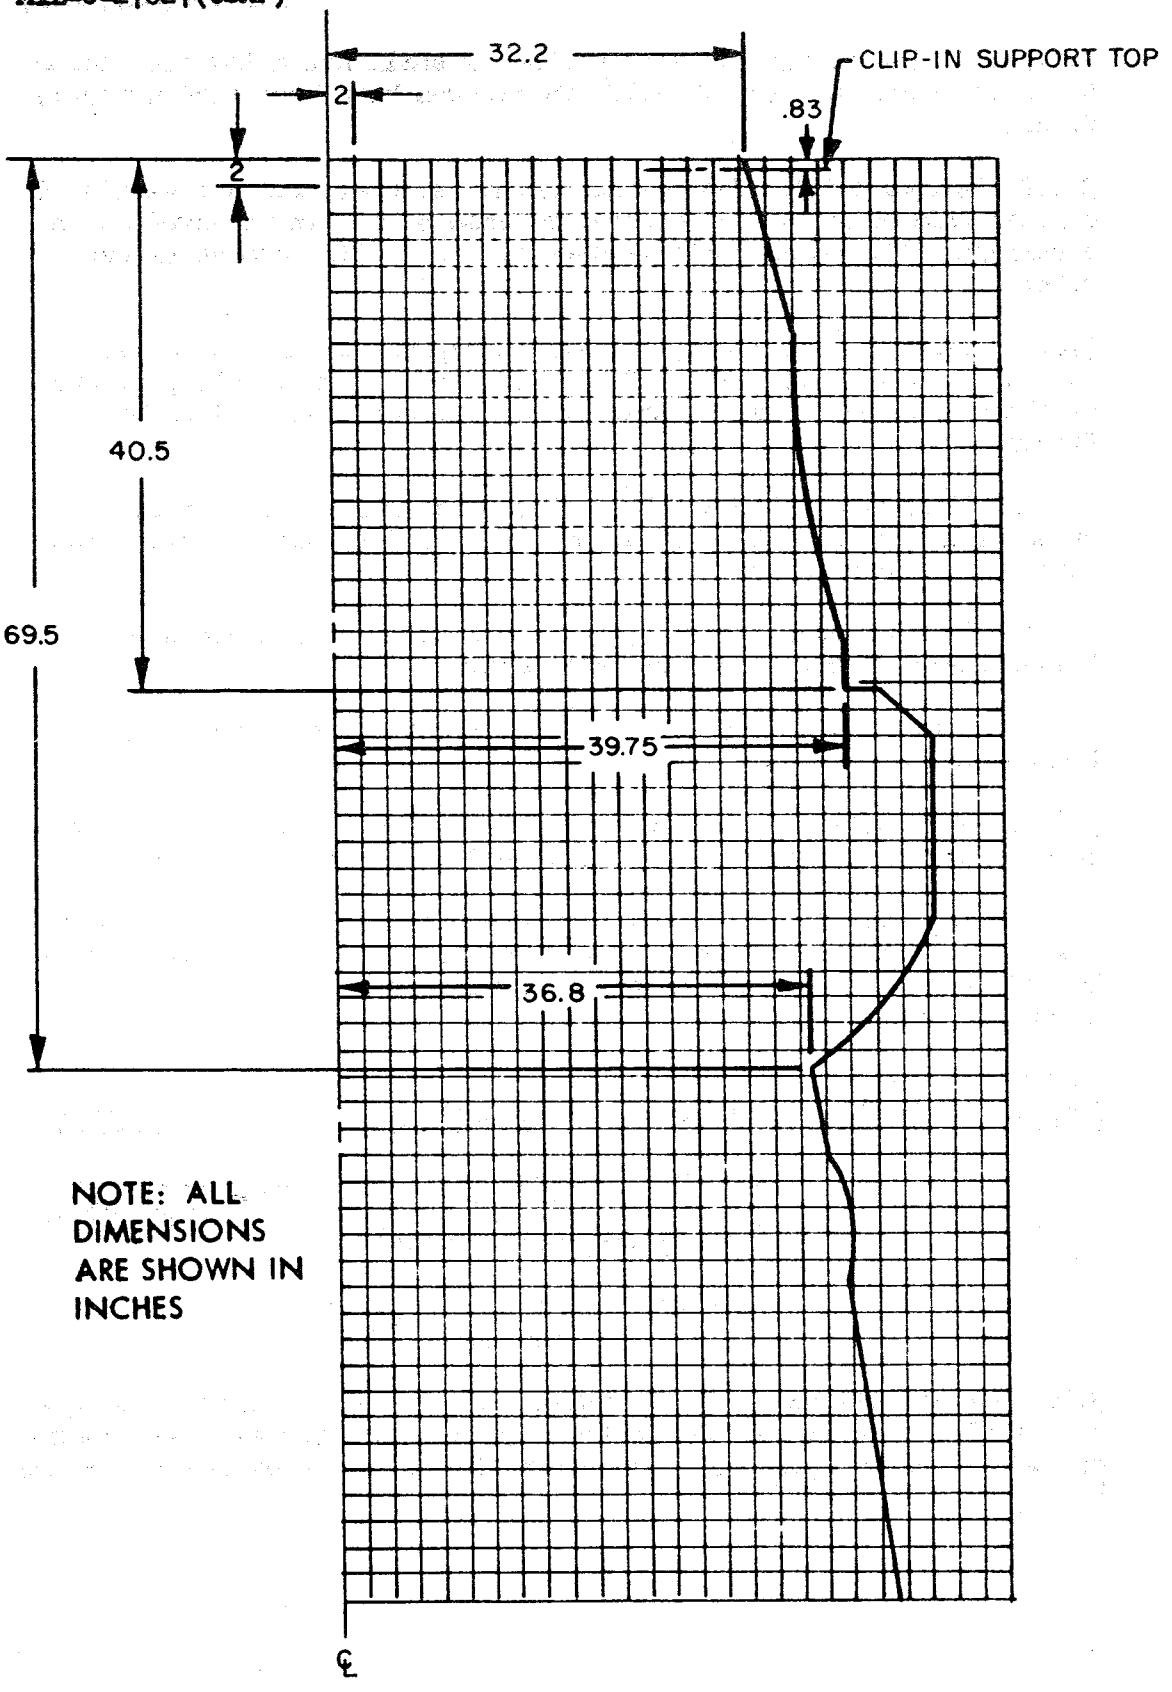


FIGURE 5 RELEASE ENVELOPE

Source: https://assist.dla.mil -- Downloaded: 20261-20T10:38Z
Check the source to verify that this is the current version before use.

Item Number	Stock Number	Part Number	Item Description	Quantity
1		61D14650	Cartridge Kit, Bomb Ejection MLU-12/C	12

3.11 WORKMANSHIP. The MHU-29/C, including all parts and accessories, shall be fabricated in a manner that will insure that the criteria of appearance, fit and adherence to specified tolerances are observed. Particular attention shall be given neatness and thoroughness of marking of parts and assemblies, plating, painting, riveting, and welding. All parts shall be free from burrs and sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 CLASSIFICATION OF TESTS. The inspection and testing of the MHU-29/C shall be as follows:

a. Preproduction Tests.

b. Acceptance Tests.

4.2 PREPRODUCTION TESTING

4.2.1 PREPRODUCTION TEST SAMPLES. The preproduction test samples shall be representative of the production MHU-29/C Subassemblies. They shall be tested at a laboratory designated by the procuring activity, or, where so stated in the contract, at the contractor's plant under the supervision of the procuring activity.

4.2.1.1 PREPRODUCTION TEST REPORTS. In the event that preproduction testing is performed at the contractor's plant, the contractor shall, after completion of the preproduction tests, prepare a preproduction test report in accordance with MIL-T-9107 and furnish three complete copies of the report to the procuring activity.

4.2.2 PREPRODUCTION TESTS. Preproduction tests shall be as shown in Table I.

4.3 ACCEPTANCE TESTS. Acceptance tests shall consist of the individual tests shown in Table I.

4.4 TEST CONDITIONS

4.4.1 STANDARD CONDITIONS. All tests shall be conducted at standard conditions unless otherwise specified. Standard conditions shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

TABLE I

TEST	TEST PARAGRAPH	REQUIREMENT PARAGRAPH	SUB-ASSEMBLY	PREPRO-DUCTION	ACCEPTANCE (INDIVIDUAL)
Examination of Product	4.6.1	3.3, 3.12	✓	✓	✓
Conformance to Drawings	4.6.2	3.5	✓	✓	✓
Yield Load Test	4.6.3.1	3.6	✓	✓	
Ultimate Load Test	4.6.3.2	3.6	✓	✓	
Electrical Functional Test	4.6.4.1	3.7.1.1	✓	✓	✓
Mechanical Functional Test	4.6.4.2	3.7.1.2	✓	✓	✓
Release Tests	4.6.4.3	3.7.3	✓	✓	
Salt Spray	4.6.5.2	3.8 a.	✓	✓	
Vibration	4.6.5.3	3.8 b.	✓	✓	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

a. Vibration and shock amplitude - plus or minus 5 percent; frequency - plus or minus 2 percent.

b. Voltage - plus or minus 2 percent.

c. Current - plus or minus 2 percent.

d. Time interval - plus or minus 5 percent.

e. Applied load - plus or minus 5 percent in pounds.

4.4.2 REQUIRED MEASUREMENTS

a. Firing Time

b. Release Time

c. Firing Current

d. Voltage

e. Test Load

f. Mechanical Lock Pull Load

4.5 TEST EQUIPMENT REQUIRED. Test equipment required for performance of testing is as follows:

a. One MAU-6/A Rack.

b. One tester conforming to schematic in figures 6A, 6B and 7 of this specification.

c. One Jack Kit, Hydraulic, Hand KMU-128/E.

d. One fixture, as shown in figures 8A and 8B, with provisions for loading as required by paragraph 4.6.3, as shown in figures 1, 2 and 3.

e. One release test fixture, as shown in figures 8A and 8B, weighted as shown in figure 9.

4.5.1 GENERAL

a. The cartridges used in the tests requiring firing shall be from lots that have passed the tests of MIL-C-27029.

4.6 TEST METHODS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

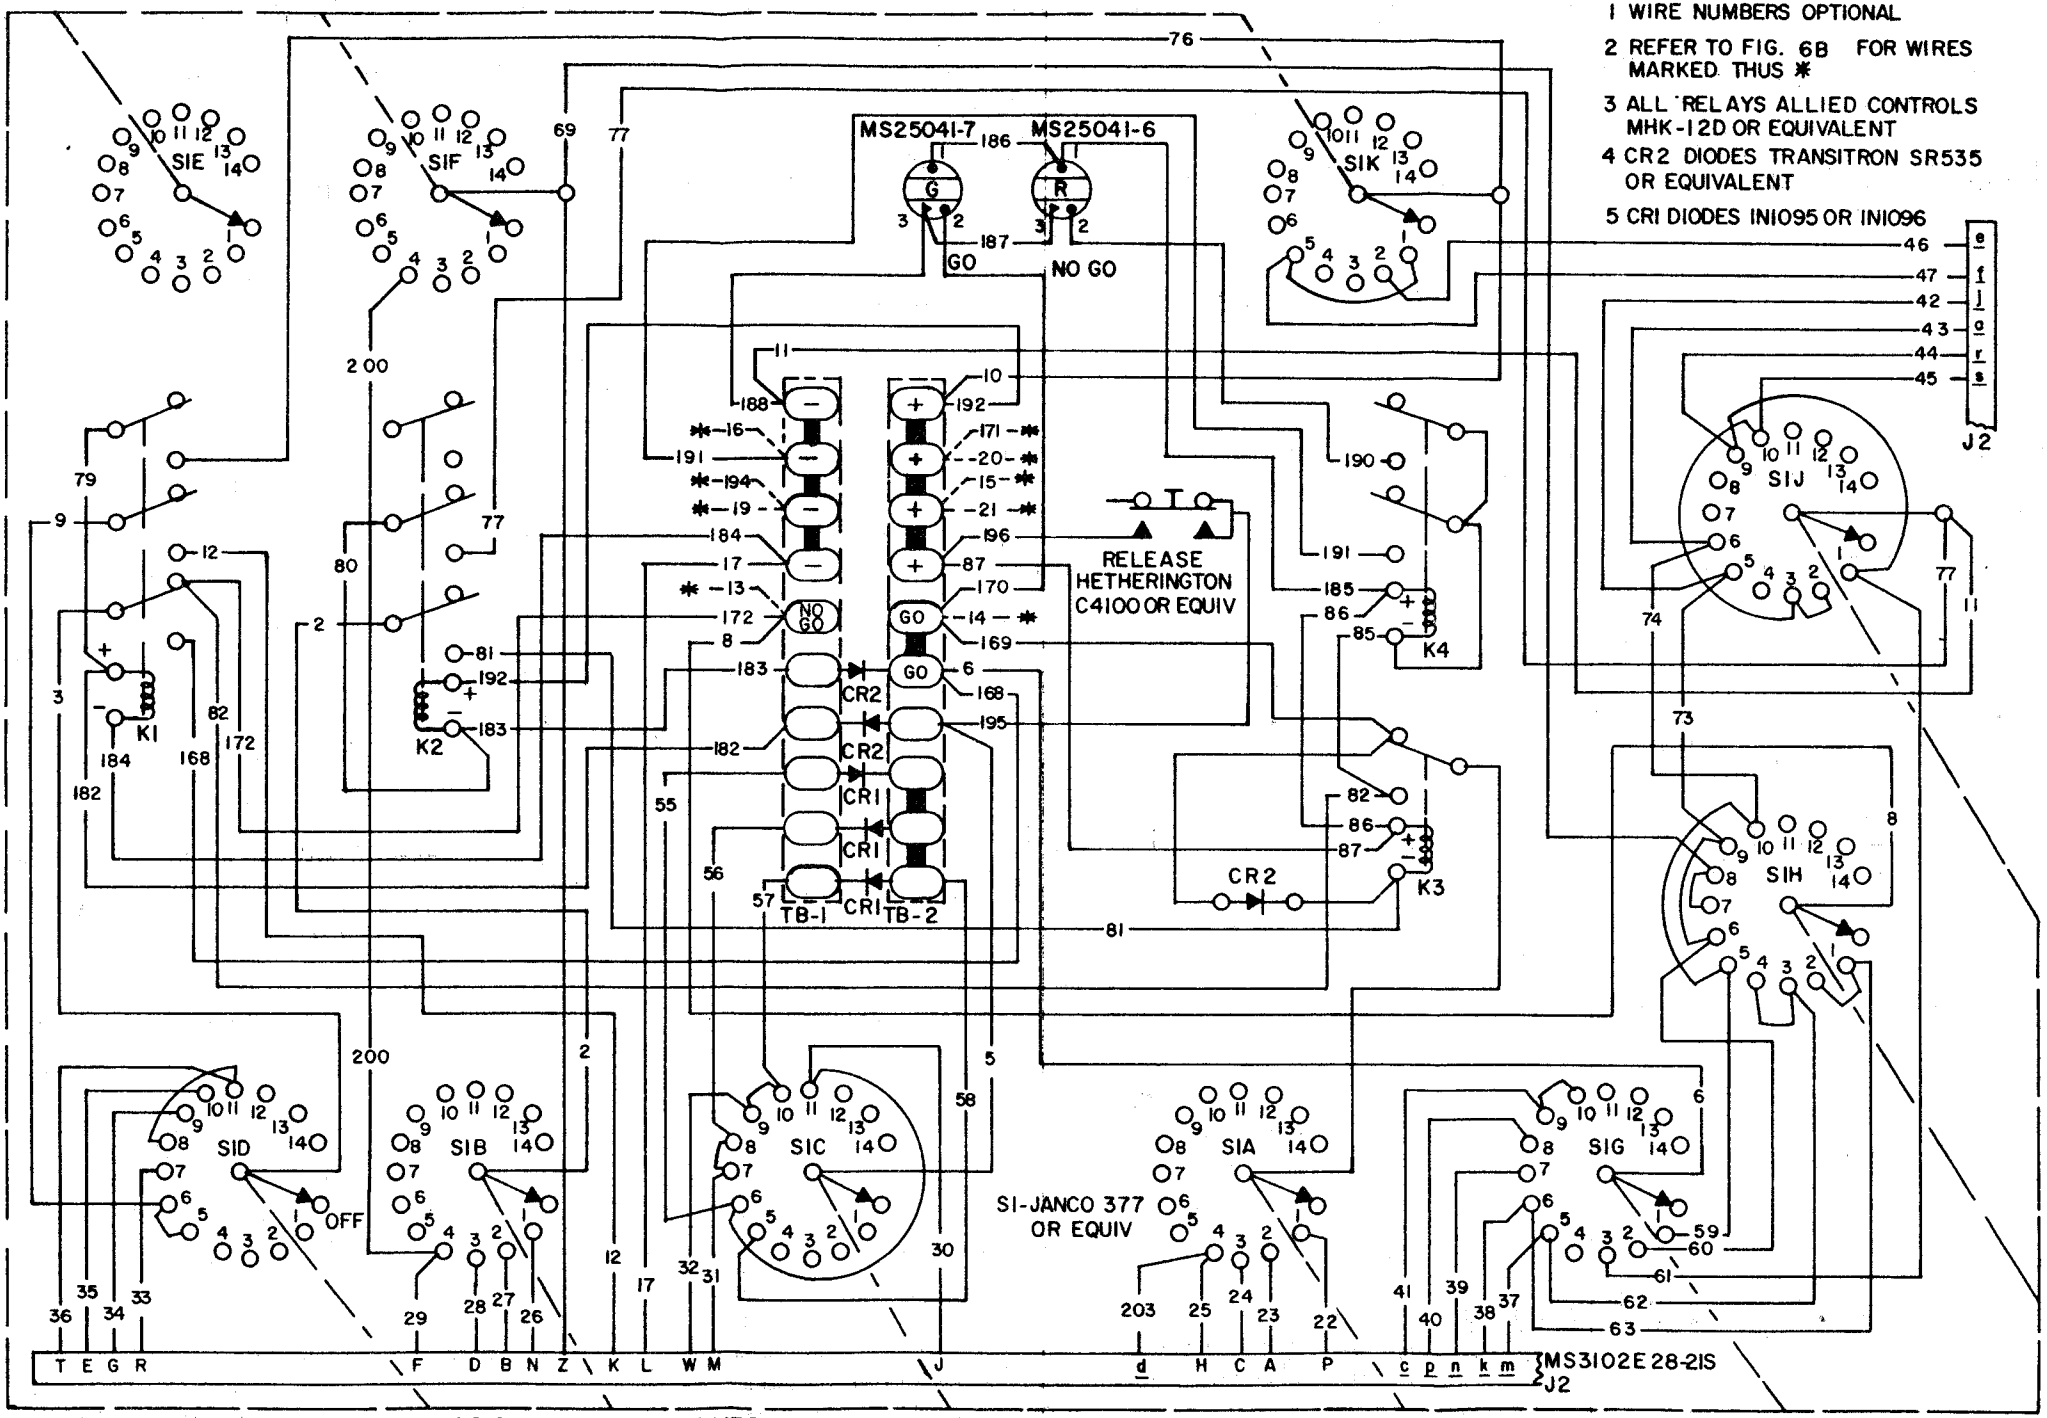


FIGURE 6A WIRING DIAGRAM, TESTER, SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

1 WIRE NUMBERS OPTIONAL
2 REFER TO FIG 6A FOR WIRES MARKED THUS *

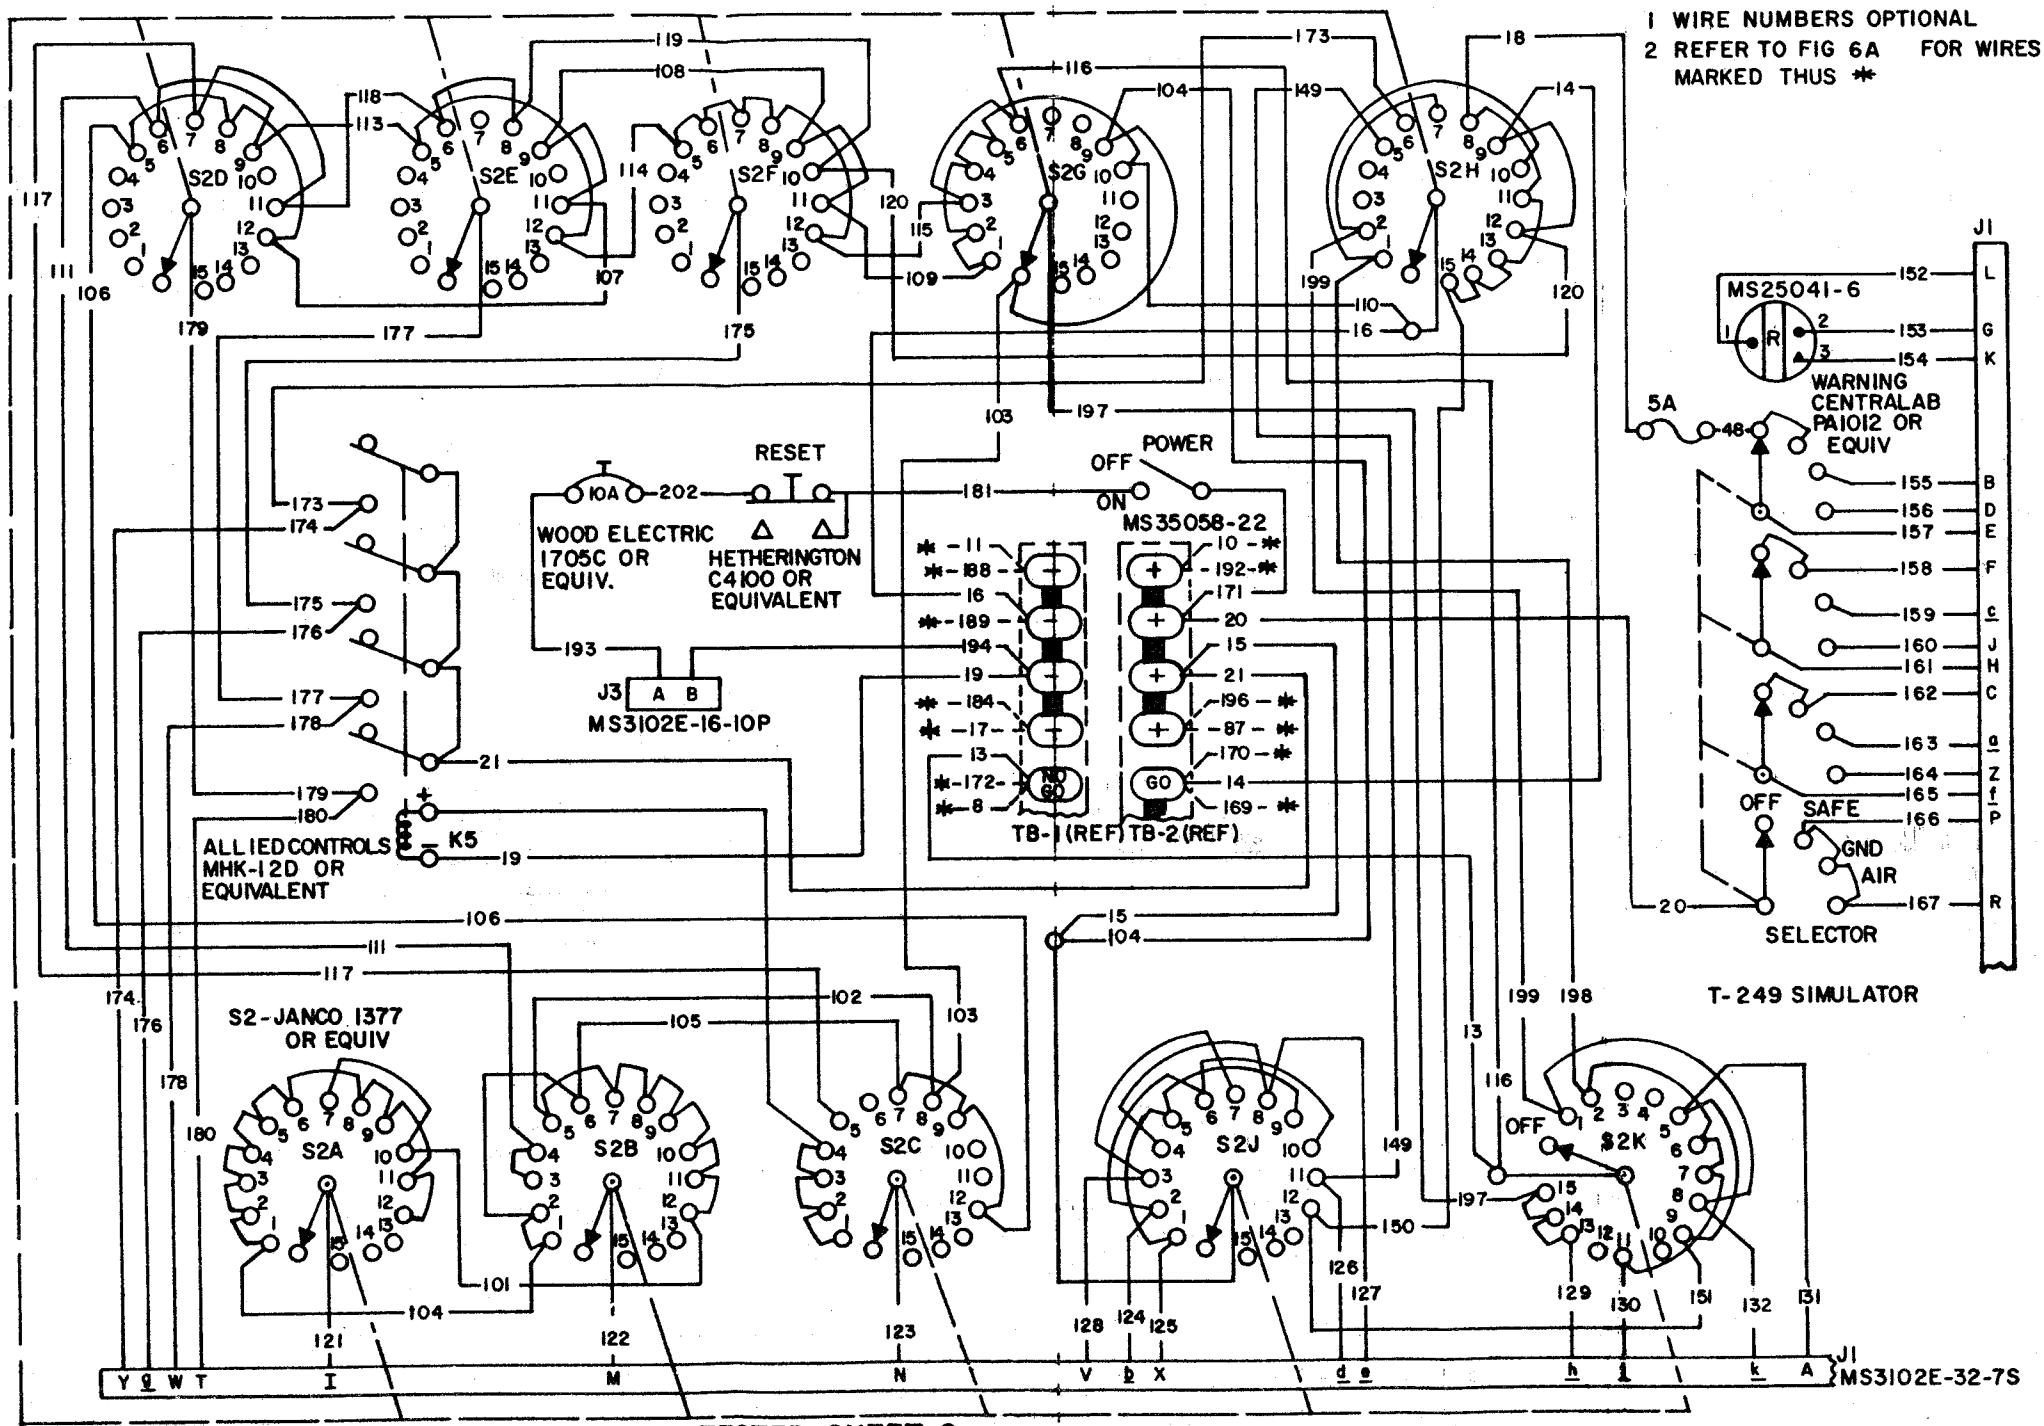


FIGURE 6B WIRING DIAGRAM - TESTER SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

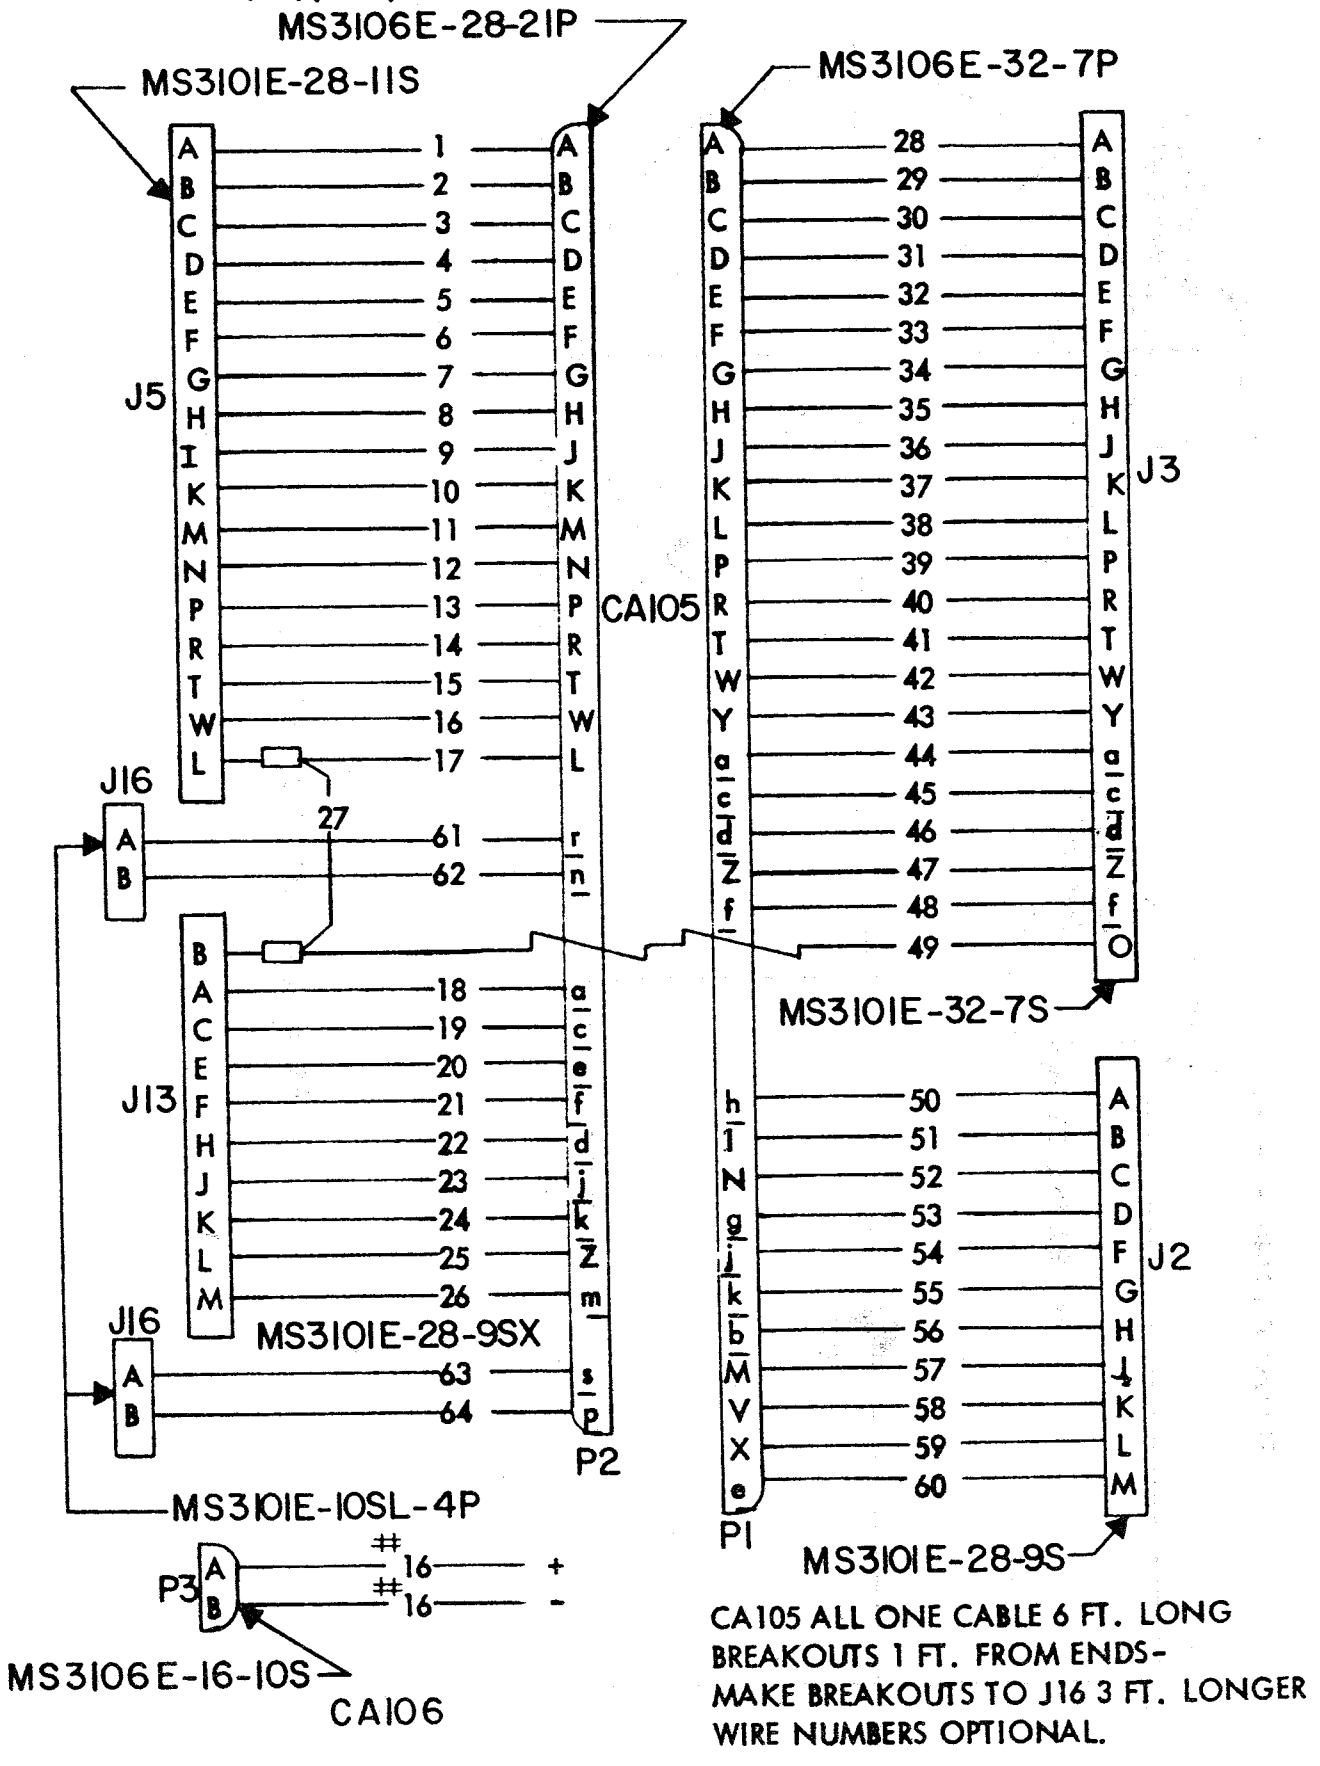


FIGURE 7 TESTER CABLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

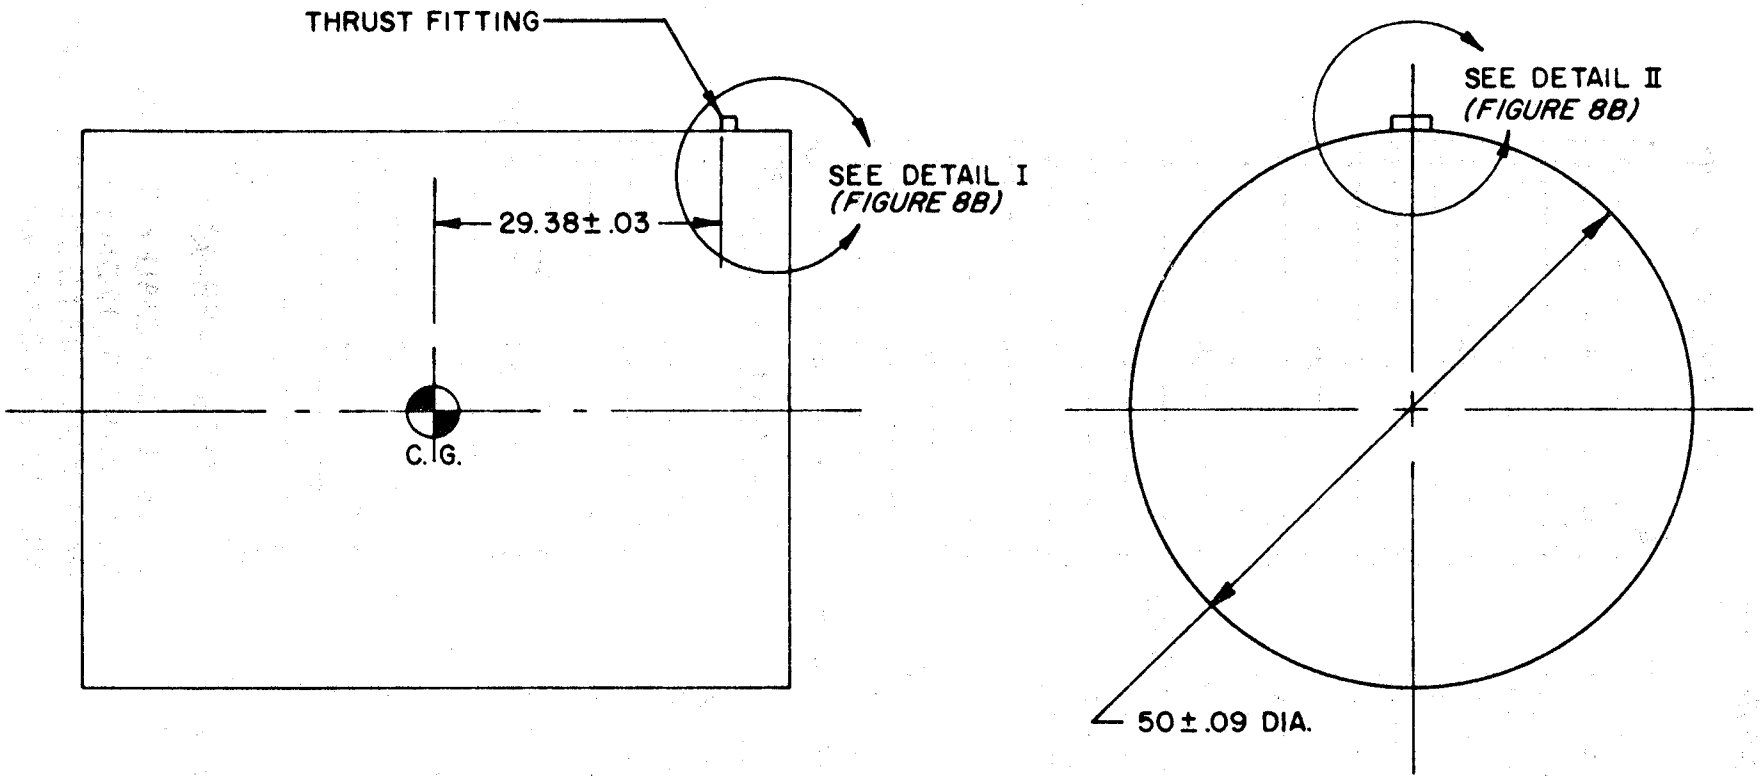


FIGURE 8A LOADING FIXTURE

MIL-C-27027(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

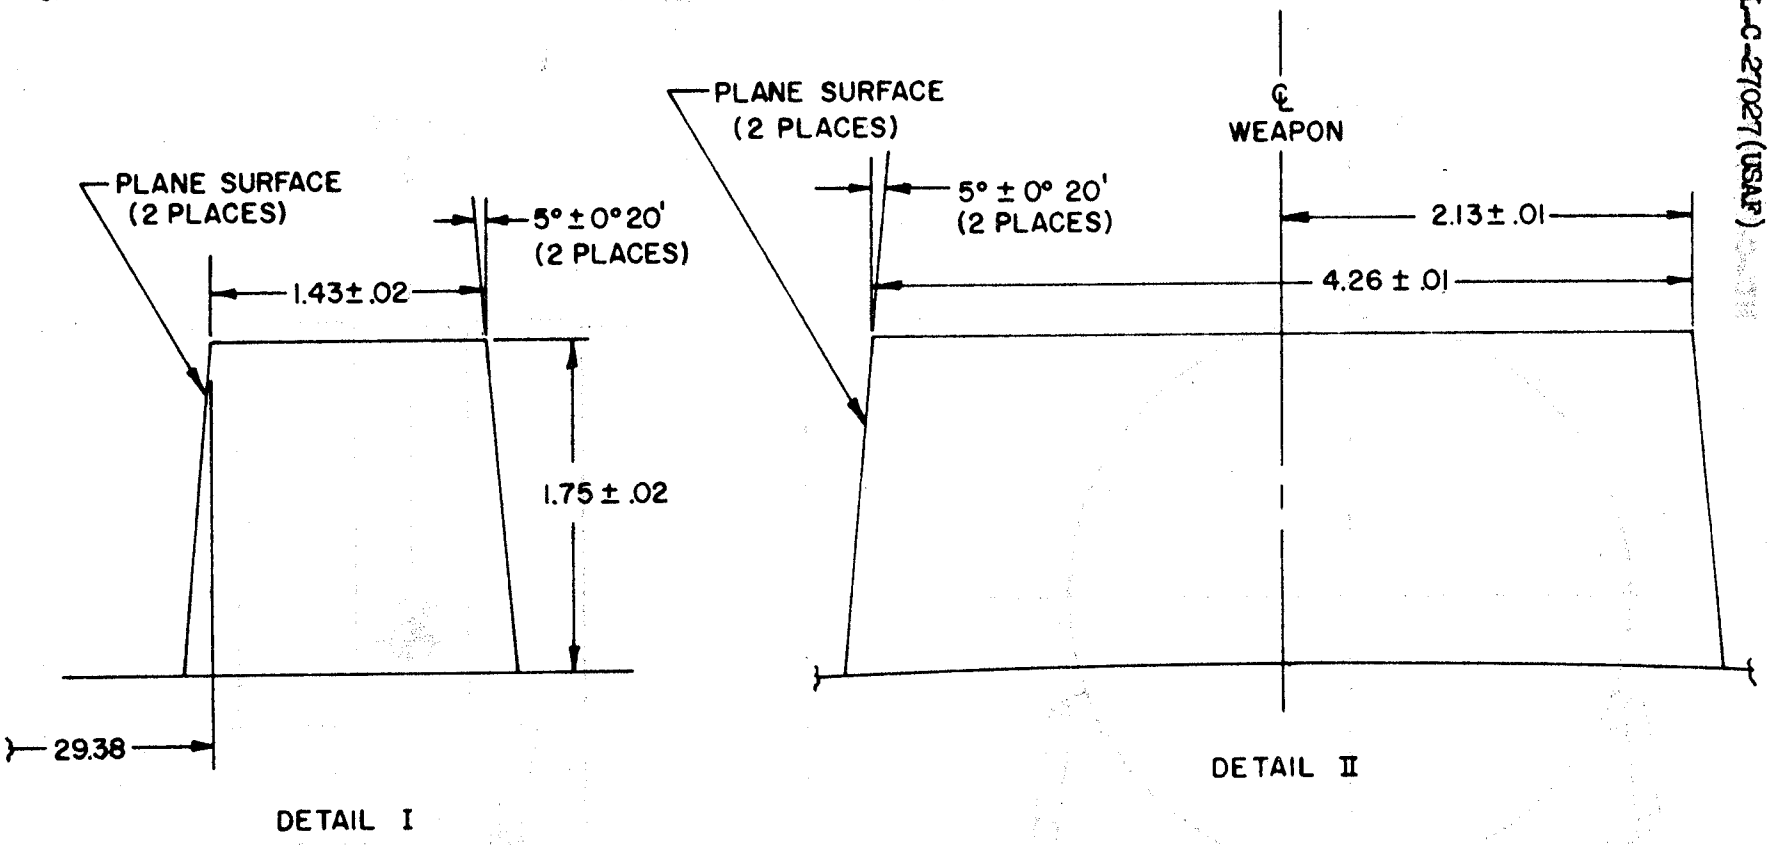


FIGURE 8B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

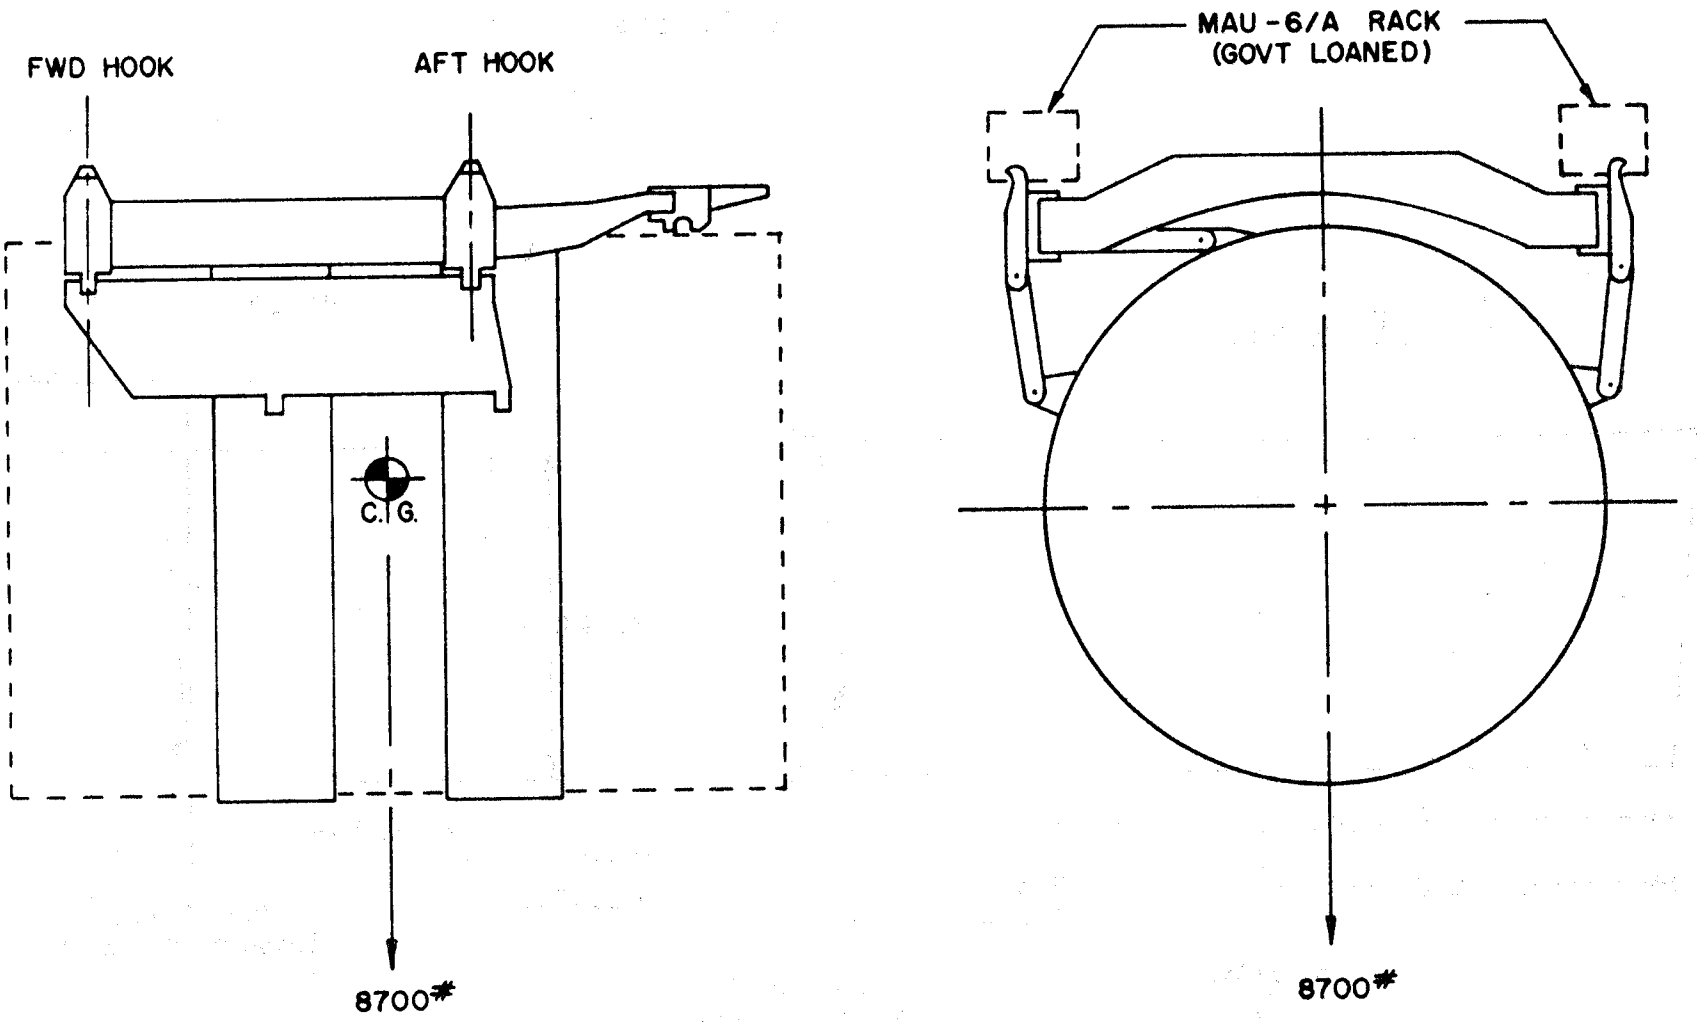


FIGURE 9 RELEASE LOAD

MIL-C-27627(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

4.6.1 EXAMINATION OF PRODUCT. Each unit shall be given a complete examination to determine compliance with the requirements of this specification for which tests are not specified, including materials and workmanship.

4.6.2 CONFORMANCE TO DRAWINGS. Each unit shall be inspected for strict conformance to the drawings.

4.6.3 STATIC STRENGTH TESTS. The bands shall be pretensioned to a fixture described in figures 8A and 8B. The structural loads shall be applied. The test shall be conducted at standard conditions. Band pretensioning procedures shall be as follows: the bands shall be tensioned simultaneously with two jacks. The bands will be loaded to 3000 $\pm$ 300 pounds on each jack, then the load will be relieved to 2000 $\pm$ 200 pounds on each jack. The nuts on the cable assembly will then be torqued until the jack load is relieved to 1000 $\pm$ 100 pounds. Relieve the load on jacks, wait two minutes, then load with the jacks to 3000 $\pm$ 300 pounds for one minute, relieve load and remove jacks.

4.6.3.1 YIELD LOAD TEST. Yield loads (1.15 times the magnitude of the limit loads) shall be applied for a period of not less than 3 minutes. There shall be no permanent set.

4.6.3.2 ULTIMATE LOAD TESTS. Ultimate loads (1.50 times the magnitude of specified limit loads) shall be applied for a period not less than 10 seconds and there shall be no failure of any component as a result of this test. (Permanent set permissible.)

4.6.4 FUNCTIONAL TESTS

4.6.4.1 ELECTRICAL SYSTEM FUNCTIONAL TESTS. Electrical system functional tests shall be made by use of a tester. The wiring diagram of the tester is shown in figures 6A and 6B. The tester cables are indicated in figure 7.

4.6.4.1.1 PRELIMINARY INSTRUCTIONS

a. Connect test box cable CA105 between tester and plugs P13 and P16 (2).

b. Mate plug P20 of Cable Assembly, Release (CA101) with J20, plug P14 with J14, plug P12 with L100, and P15 plugs of Cable Assembly, Cartridge (58D46643) (CA102 or CA103) with J15 plugs.

c. Place all test box switches in "OFF" position.

d. Connect test box to 28 volts dc power source by means of tester cable CA106.

Source: https://assist.dla.mil -- Downloaded: 20260-20T10:38Z
Check the source to verify that this is the current version before use.

e. Close test box circuit breaker.

f. Place test box power switch in "ON" position.

g. Press-to-test both the "GO" light and the "NO GO" light.

4.6.4.1.2 SWITCH S1 CHECK-OUT PROCEDURE

NOTE: Any steady "NO GO" signal during the following test is an indication of faulty wiring on the subassembly.

a. Tie the bomb release indicator switch in the subassembly loaded position.

b. Pull drive-crank to unlocked position.

c. Place Switch S1 in Position "1."

The "GO" light shall light.

d. Place Switch S1 in Position "2."

The "GO" light shall remain on (after flickering).

e. Place Switch S1 in Position "3."

The "GO" light shall remain on (after flickering).

f. Release drive-crank to locked position.

g. Place Switch S1 in Position "4."

(1) Momentarily press the "RESET" button.

(2) The "GO" light shall go off, then light.

(3) Slowly pull drive-crank to unlocked position.

The "GO" light shall go out, then light again as the subassembly is fully unlocked.

(4) Momentarily press the "RESET" button.

The "GO" light shall go off.

h. The subassembly shall be in the unlocked position.

i. Place Switch S1 in Position "5."

The "GO" light shall remain off.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T10:38Z
Check the source to verify that this is the current version before use.

j. Place Switch S1 in Position "6."

(1) The "GO" light shall remain off.

(2) Untie the bomb release indicator switch.

The "GO" light shall light.

k. Release drive-crank to locked position.

l. Place S1 in Position "7."

The "GO" light shall remain on.

m. Place S1 in Position "8."

The "GO" light shall remain on.

n. Place S1 in Position "9."

The "GO" light shall remain on.

o. Place S1 in Position "10."

The "GO" light shall remain on.

p. Place S1 in the "OFF" Position.

4.6.4.2 MECHANICAL FUNCTIONAL TEST. Apply a vertical down load on the bearing pad of the 58C46552 Crank. The 61J14605 Cable Cutter locking valve shall rotate to the fully unlocked position. The load required shall be 30 pounds or less, and the rotation of the crank shall not exceed 43 degrees.

4.6.4.3 RELEASE TESTS. Each drop test program shall consist of the specified 10 consecutive successful drops with the release test fixture of figures 8A and 8B, loaded as shown in figure 9. Failure to release shall constitute an unsuccessful test.

4.6.5 ENVIRONMENTAL TESTS

4.6.5.1 GENERAL. The MHU-29/C shall be loaded with the test fixture specified in figures 8A and 8B while being subjected to the environmental tests.

4.6.5.2 SALT SPRAY. The Clip-In Subassembly, while locked, shall be tested according to Procedure I of MIL-E-5272. At the completion of the test, the electrical system shall meet the test requirements of the Electrical System Functional Tests of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

4.6.5.3 VIBRATION. The subassembly with test load shall be subjected to tests in accordance with Procedure XII of MIL-E-5272 except that the range of frequencies and vibratory accelerations shown in figure 10 shall apply in lieu of figure 1 of MIL-E-5272. The test shall be conducted in two parts:

a. The release mechanism shall be unlocked and fired at the completion of the resonance frequency vibration test while the unit is being vibrated at resonant frequency.

b. The release mechanism shall be unlocked and fired subsequent to the completion of the vibration tests.

4.6.5.4 Prior to and at the completion of these tests, the electrical system shall meet the test requirements of the Electrical System Functional Tests of this specification.

4.6.6 BASIS FOR REJECTION

a. MHU-29/C Subassemblies or components failing to meet their respective tests shall be rejected. Rejected units either shall be replaced or shall be reworked to correct the defects, after which all specified tests shall be repeated. Rejected units shall not be resubmitted for inspection without furnishing full particulars concerning previous rejection and measures taken to overcome the defects.

b. All parts, specimens or assemblies destroyed in making tests required by this specification shall be in addition to the quantity specified in the order and shall be furnished to the procuring activity without increasing the cost of the contract. Accepted units shall have such acceptance marking on the unit as specified by the procuring activity.

c. After any test, the occurrence of any of the following conditions shall be sufficient cause for rejection:

(1) Failure to perform within required tolerances.

(2) Failure of structure, whether by deformation, rupture, or misalignment.

(3) Parts not properly finished.

(4) Loose connections, badly soldered joints or frayed ends of wires.

5. PREPARATION FOR DELIVERY

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.

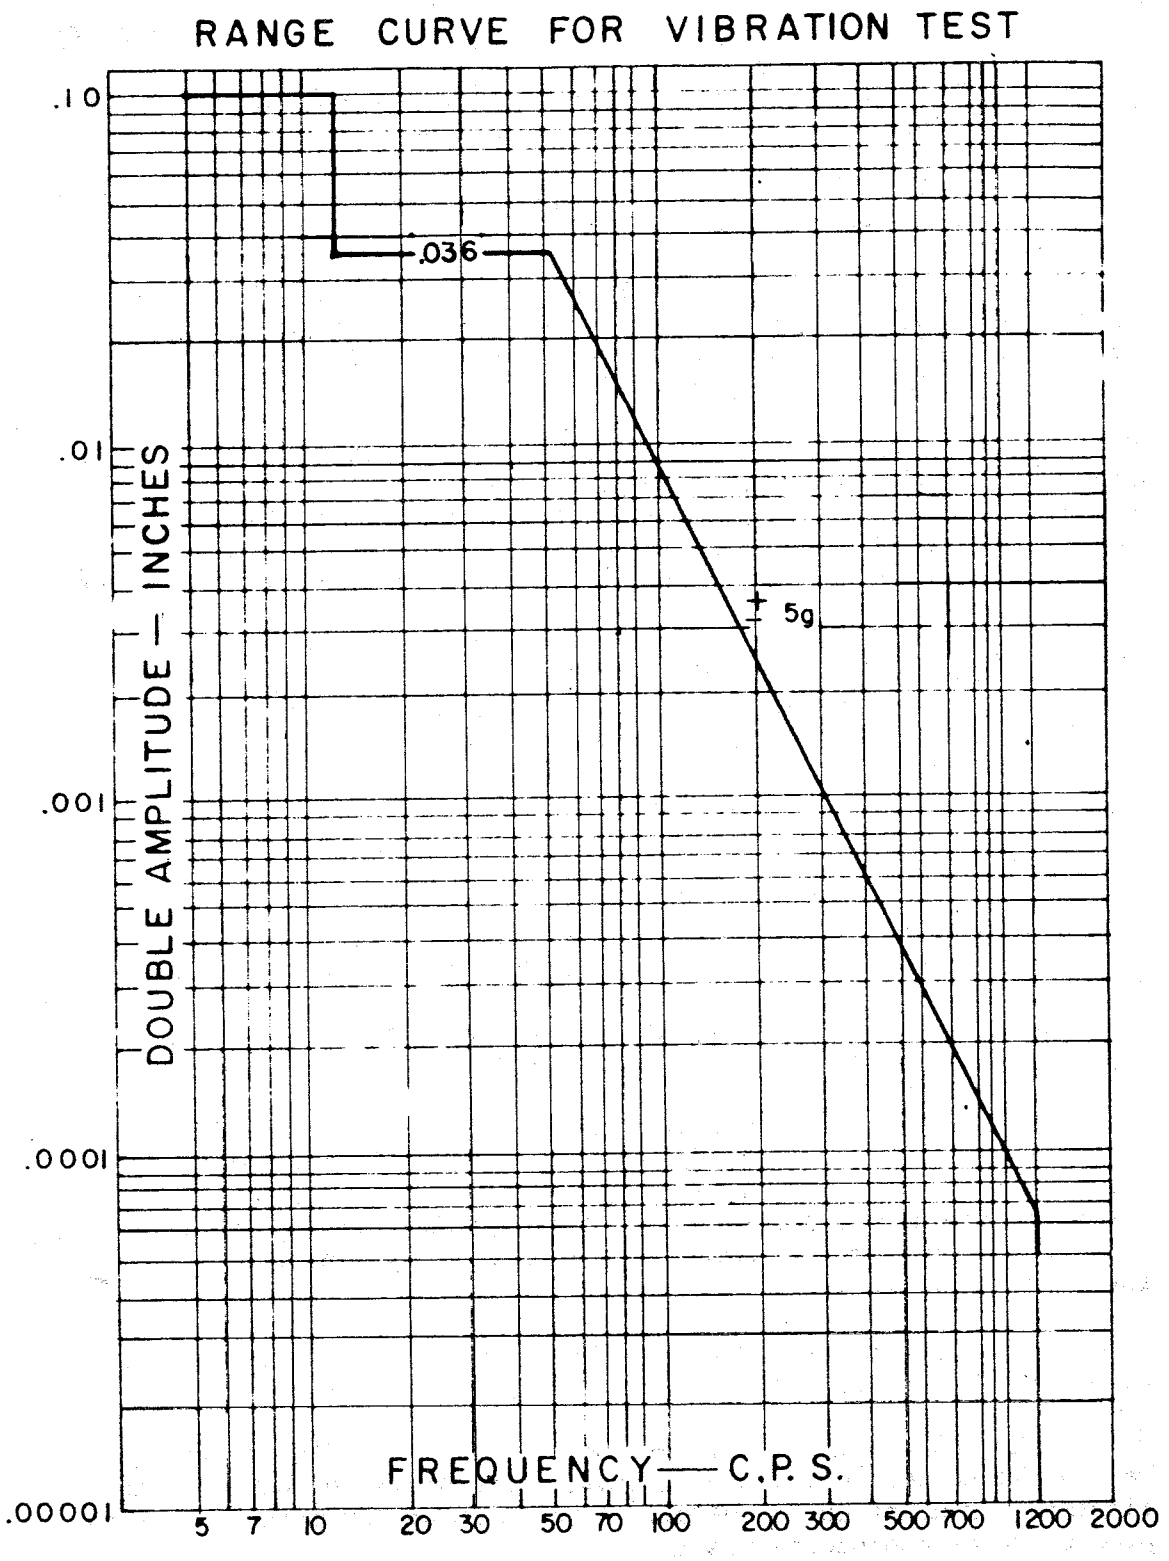


FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 20261-20T10:38Z
Check the source to verify that this is the current version before use.

5.1 SHIPPING CONFIGURATION. The MHU-29/C Clip-In Subassembly shall be shipped assembled for all levels of shipment.

5.2 PRESERVATION. Preservation for all shipment levels shall be in accordance with Method I, MIL-P-116.

5.3 PACKAGING AND PACKING, LEVELS A AND B. A number of MHU-29/C Clip-In Subassemblies as specified by the procuring activity shall be physically protected in accordance with JAN-P-100 and packed in a box conforming to PPP-B-601 or PPP-B-621.

5.4 PACKAGING AND PACKING, LEVEL C. MHU-29/C Clip-In Subassemblies for Level C shipment shall be packed in exterior-type containers in such a manner as to insure safe transportation at the lowest rate to the point of delivery. Containers shall meet consolidated freight classification rules or the regulations of other common carriers as applicable.

5.5 MARKING FOR SHIPMENT AND STORAGE. Interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129. The shipment marking nomenclature shall be:

CLIP-IN SUBASSEMBLY MHU-29/C

6. NOTES

6.1 INTENDED USE. The Clip-In Subassembly MHU-29/C is intended for carrying weapons internally in high-performance bomber aircraft.

6.2 ORDERING PARTS. Invitations for bids, contracts, and purchase orders should state the conditions for the following:

6.3 PREPRODUCTION TEST SAMPLES. It is expected that the contract or purchase order will specify the units required as first articles and that these first articles will be subjected to the preproduction tests to determine compliance with this specification. It is expected that the contract or purchase order will specify the point of inspection for these tests.

6.4 GOVERNMENT-LOANED PROPERTY. The quantity of Government-loaned property may be varied according to the production rate.

6.4.1 The MAU-6/A Rack which has been used in the Static Strength Test shall be marked for identification and shall not be used for aircraft installation. However, it may be used for additional preproduction or acceptance testing.

6.5 The Jack Kit, Hydraulic, Hand KMU-128/E will be procured to its own specification and will be furnished with applicable special weapons equipment list.

Source: https://assist.dla.mil -- Downloaded: 20260-20T10:38Z
Check the source to verify that this is the current version before use.

6.6 DEFINITIONS

a. PREPRODUCTION TESTS. Preproduction tests are those tests performed prior to production or representative samples of the production Clip-In Subassembly to demonstrate that the assembly meets the requirements of this specification.

b. ACCEPTANCE TESTS. Acceptance tests are those tests accomplished on equipment submitted for acceptance under contract to determine conformance to the requirements of this specification and to determine that the units are equivalent in performance and construction to the approved preproduction samples.

c. RELEASE TIME. Time from signal input to time band movement begins.

d. FIRING TIME. Time from signal input to time of separation of bridge wire of cartridge.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely-related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

SWVBC
MHJ/pfg

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:38Z
Check the source to verify that this is the current version before use.