MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

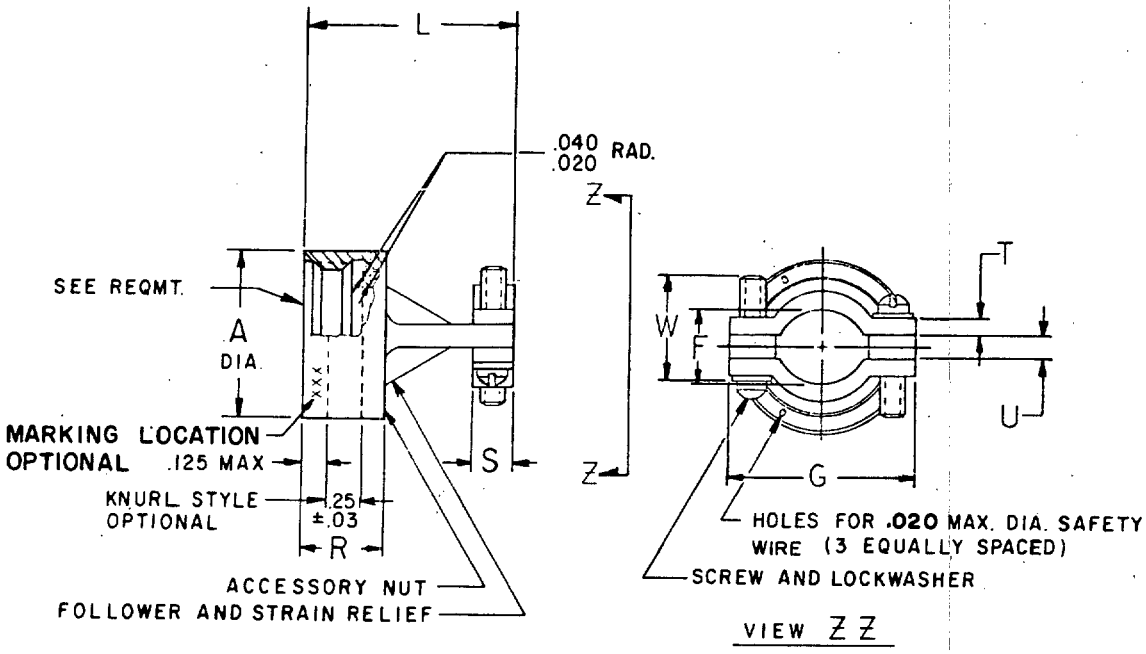


FIGURE 1. Configurations and dimensions

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Dash number	For connector shell size (REF)				A +.000 -.045 (1.14) Dia.	F Cable clamp		G ±.020
	MIL-C-81703 series 3	MIL-C-26482 series 2	MIL-C-5015 crimp	MIL-C-83723 series III		Min. Open	Min. Closed	
-3	3				.669 (16.99)	.204	.125	.732
-8		8	8S	8	.617 (15.67)	.204	.125	.732
-10		10	10S, 10SL	10	.734 (18.64)	.286	.187	.812
-12	7	12	12S & 12	12	.858 (21.79)	.416	.291	.968
-14	12	14	14S & 14	14	.984 (24.99)	.476	.351	1.026
-16	19	16	16S & 16	16	1.112 (28.24)	.625	.501	1.299
-18	27	18	18	18	1.218 (30.94)	.706	.518	1.437
-20	37	20	20	20	1.345 (34.16)	.831	.581	1.537
-22		22	22	22	1.468 (37.29)	.956	.644	1.633
-24		24	24	24	1.593 (40.46)	1.081	.706	1.755
-28			28		1.969 (50.01)	1.187	.750	2.000
-32			32		2.219 (56.36)	1.250	.875	2.366
-36			36		2.469 (62.71)	1.375	.938	2.476
-40			40		2.719 (69.06)	1.500	.938	2.546
-44			44		2.969 (75.41)	1.750	1.188	2.840
-48			48		3.219 (81.76)	1.875	1.312	3.324
-61	61				1.653 (41.99)	1.081	.706	1.755

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Dash number	L ±.062 (1.57)	S ±.020	T ±.015	U ±.020	W ±.032 Screw length	Screw size	R +.000 -.062
-3	.890 (22.61)	.250	.125	.125	.500	6-32	.540
-8	.890 (22.61)	↑	↑	↑	.500	6-32	↑
-10	1.000 (25.40)				.500	6-32	
-12	1.125 (28.58)				.625	6-32	
-14	1.125 (28.58)	↓	↓	↓	.625	6-32	
-16	1.250 (31.75)	.250	.125	.125	.625	6-32	
-18	1.500 (38.10)	.375	.156	.156	.750	8-32	
-20	1.625 (41.28)	↑	↑	.156	.875	8-32	
-22	1.750 (43.18)	↓	↓	.156	1.000	8-32	↓
-24	1.875 (47.62)	.375	.156	.188	1.125	8-32	.540
-28	2.187 (55.55)	.500	.188	.250	1.250	8-32	.702
-32	2.375 (60.32)	↑	↑	.250	1.250	1/4-20	↑
-36	2.750 (69.85)	↓		.375	1.500	1/4-20	
-40	2.938 (74.63)	.500		↑	1.500	1/4-20	
-44	3.312 (84.12)	.625	↓	↓	1.750	1/4-20	↓
-48	3.687 (93.65)	.625	.188	.375	2.000	1/4-20	.702
-61	1.875 (47.62)	.375	.156	.188	1.125	8-32	.540

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Metric equivalents are in parentheses.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Design and construction:
Dimensions and configurations: See figure 1.
Accessories consist of an accessory nut and follower. The accessory nut shall be captivated to, and free to rotate on the follower.
Interface dimensions shall conform to MS3155 for figure 1.
Material and finish: See table I.

TABLE I. Material and finish.


Figure	Material	Finish
1	Aluminum alloy in accordance with MIL-C-85049	A,W 1/ N

1/ Not for Navy use.

Part number:
For figure 1, see example below:

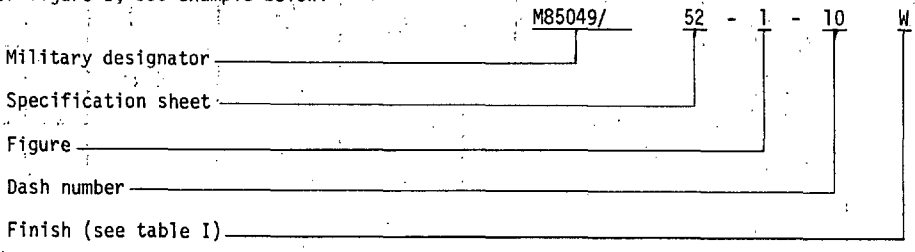

Qualification:
QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.
See MIL-C-85049, category 4B.
Supersession data:

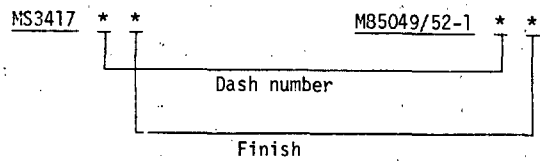

Old	New
C	W
A	W
N	N
-	A

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-38)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/838

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85049/52

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.