INCH-POUND

MIL-C-85049/60A
30 November 1990
SUPERSEDING
MIL-C-85049/60
16 January 1980
MS3158C
10 May 1982
MS3416E
10 May 1982
MIL-C-87323/16M
21 September 1972

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, ADAPTER, SHRINK BOOT, CATEGORY 5 (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

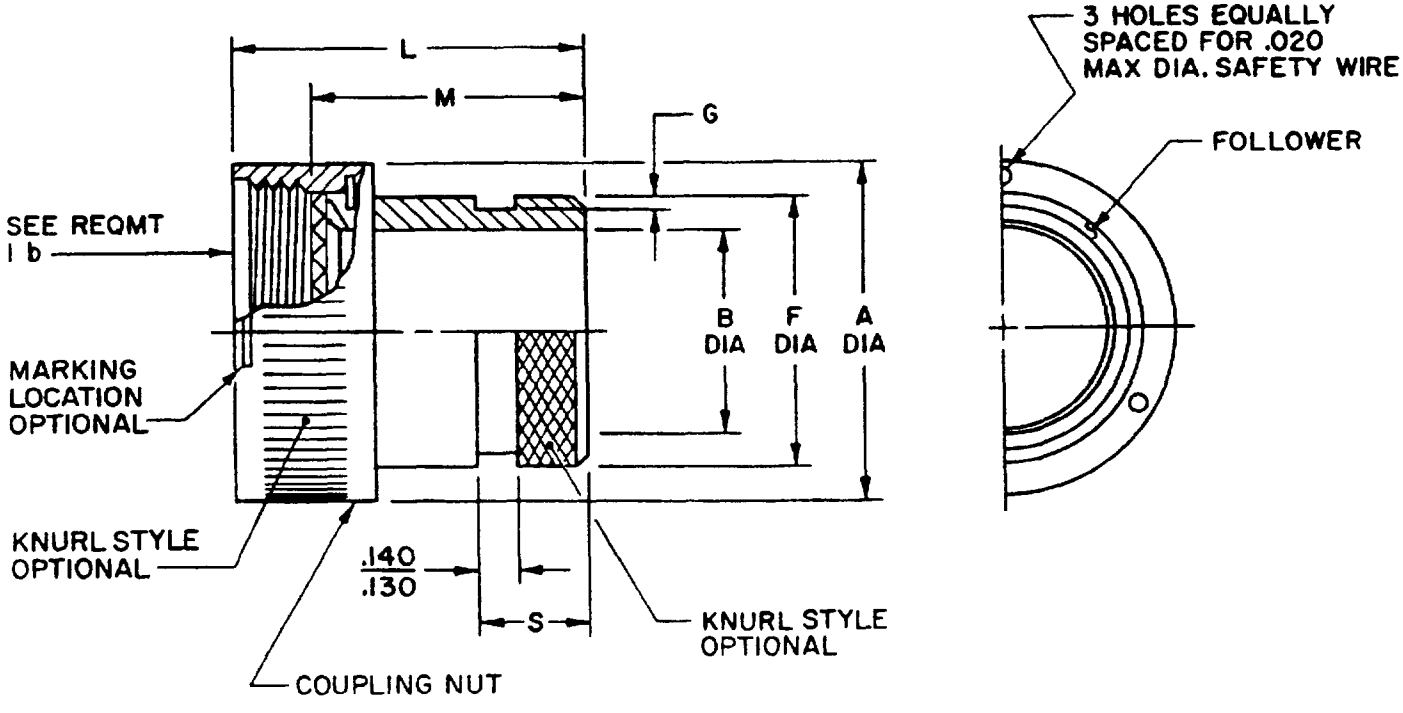


FIGURE 1. Configuration and dimensions.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Dash No.	For Connector Shell Size (Ref) MIL-C-26482			A +.000 -.045 Dia	F +.000 -.020 Dia	G +.008 -.000	L Max	M Max	S Max	B Min Dia
	MIL-C-81703 Series 3	Series 2 & MIL-C-83723 Series III	MIL-C-5015 Crimp							
-3	3			.669	.533	.044	1.187	.832	.425	.250
-8		8	8S	.617	.533	↑	↑	↑	↑	.250
-10		10	10S, 10SL	.734	.605					.355
-12	7	12	12S, 12	.858	.774					.491
-14	12	14	14S, 14	.984	.838					.565
-16	19	16	16S, 16	1.112	.963	↓				.690
-18	27	18	18	1.218	1.042	.044				.769
-20	37	20	20	1.345	1.217	.069				.894
-22		22	22	1.468	1.355	↑	↓	↓		1.019
-24		24	24	1.593	1.443	↓	1.187	.832	↓	1.134
-28			28	1.969	1.709	.069	1.511	.994	.425	1.369
-32			32	2.219	1.919	.086	↑	↑	.587	1.615
-36			36	2.469	2.169	↑	↓	↓	↑	1.830
-40			40	2.719	2.402	↓			↓	2.045
-44			44	2.969	2.657	↓			↓	2.300
-48			48	3.219	2.907	.086	1.511	.994	.587	2.550
-61	61			1.653	1.529	.069	1.187	.832	.425	1.174

INCH	mm	INCH	mm	INCH	mm	INCH	mm
0.008	0.20	0.688	17.48	1.152	29.26	1.709	43.41
0.020	0.51	0.690	17.53	1.174	29.82	1.748	44.40
0.031	0.79	0.702	17.83	1.187	30.14	1.830	46.48
0.044	1.12	0.709	18.01	1.217	30.91	1.919	48.74
0.045	1.14	0.743	18.87	1.218	30.94	1.969	50.01
0.062	1.57	0.750	19.05	1.238	31.45	2.045	51.94
0.069	1.75	0.769	19.53	1.243	31.57	2.062	52.37
0.086	2.18	0.774	19.66	1.287	32.69	2.169	55.09
0.125	3.18	0.803	20.40	1.310	33.27	2.219	56.36
0.130	3.30	0.830	21.08	1.345	34.16	2.300	58.42
0.140	3.56	0.838	21.29	1.355	34.42	2.312	58.72
0.220	5.59	0.858	21.79	1.369	34.77	2.402	61.01
0.250	6.35	0.894	22.71	1.370	34.80	2.469	62.71
0.355	9.02	0.898	22.81	1.436	36.47	2.550	64.77
0.425	10.80	0.938	23.83	1.443	36.65	2.562	65.07
0.491	12.47	0.963	24.46	1.468	37.29	2.657	67.49
0.533	13.54	0.984	24.99	1.511	38.37	2.719	69.06
0.540	13.72	0.992	25.19	1.529	38.84	2.812	71.42
0.565	14.35	1.019	25.88	1.560	39.62	2.907	73.84
0.587	14.91	1.024	26.01	1.593	40.46	2.969	75.41
0.605	15.37	1.042	26.47	1.615	41.02	3.062	77.77
0.617	15.67	1.063	27.00	1.618	41.10	3.219	81.76
0.657	16.69	1.112	28.24	1.653	41.99	3.312	84.12
0.669	16.99	1.134	28.80	1.686	42.82		

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:13Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

Dash No.	For Connector Shell Size (Ref)			A +.000 -.045 Dia	F +.000 -.020 Dia	G +.008 -.000	R Max	T Max
	MIL-C-81703 Series 3	MIL-C-26482 Series 2 & MIL-C-83723 Series III	MIL-C-5015 Crimp					
-3	3			.750	.709	.044	.540	.22
-8		8	8S	.688	.657			
-10		10	10S,10SL	.803	.774			
-12	7	12	12S,12	.938	.898			
-14	12	14	14S,14	1.063	1.024	.044		
-16	19	16	16S,16	1.238	1.152	.069		
-18	27	18	18	1.310	1.243			
-20	37	20	20	1.436	1.370			
-22		22	22	1.560	1.443			
-24		24	24	1.686	1.618	.069	.540	
-28			28	2.062	1.969	.086	.702	
-32			32	2.312	2.219			
-36			36	2.562	2.469			
-40			40	2.812	2.719			
-44			44	3.062	2.969			
-48			48	3.312	3.219	.086	.702	
-61	61			1.748	1.653	.069	.540	.22

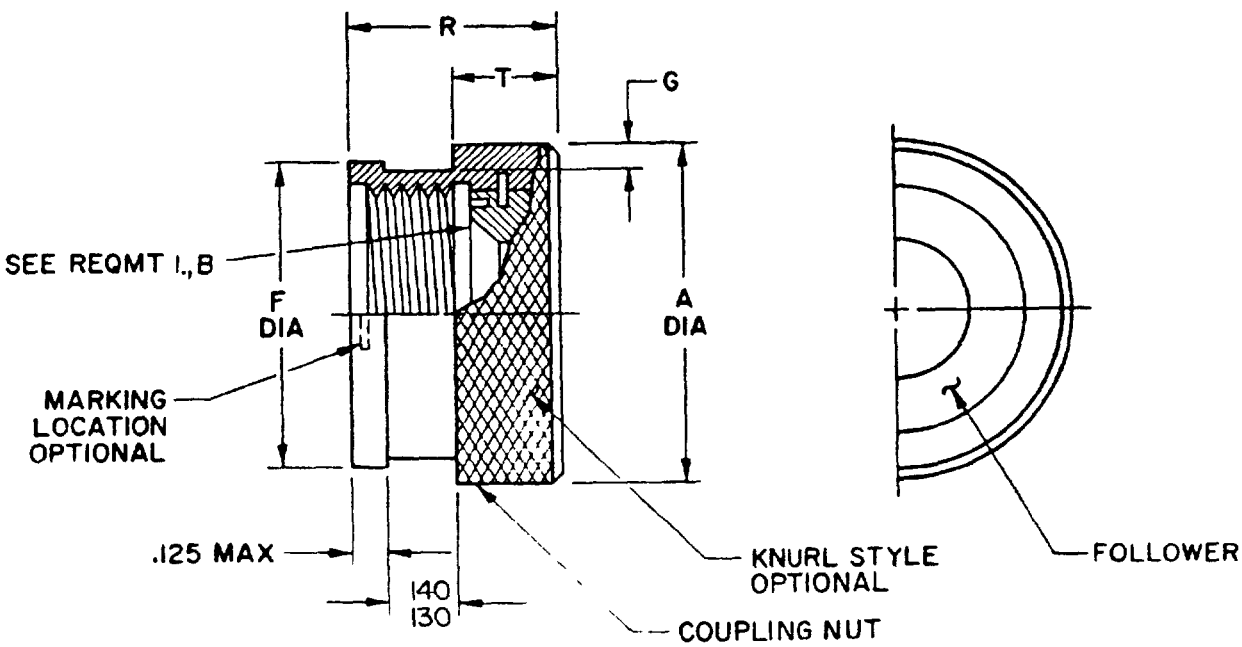


FIGURE 2. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction:

   a. Dimensions and configuration: See figures 1 and 2 and table I.

   b. Interface dimensions shall be in accordance with MIL-C-85049, figure 4.

   c. Complete accessory consists of a coupling nut and follower. The coupling nut shall be captivated to and free to rotate on the follower.

   d. Coupling thread strength shall be heavy duty in accordance with MIL-C-85049.

2. Material and finish: See table III.

TABLE III. Material and finish.

Figure	Material	Finish
1 & 2	Aluminum alloy in accordance with MIL-C-85049	1/ N, A, 2/ W


1/ Not for Navy use. Restricted to Air Force space application only.
2/ W finish is not for use in space application.

3. Qualification: See MIL-C-85049, category 5. Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.

4. Application: Used to adapt MS3109 and MS3117 shrink boots.


5. Part number:

For Figure 1, see example below:

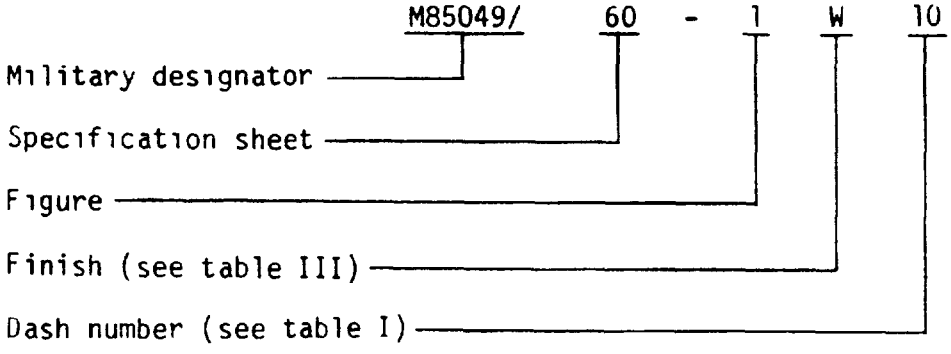


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.


For Figure 2, see example below:

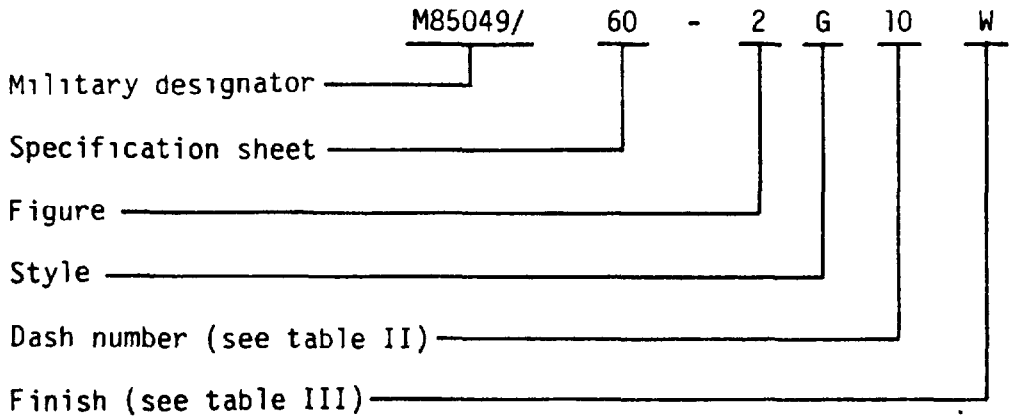

7. Supersession data:

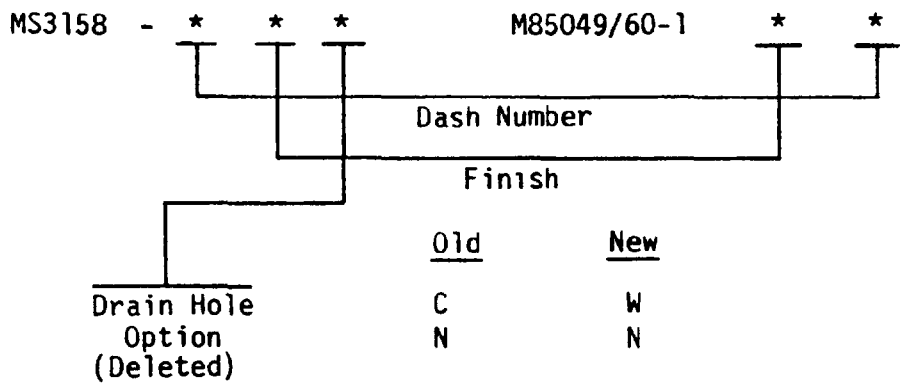


Old	New
C	W
N	N

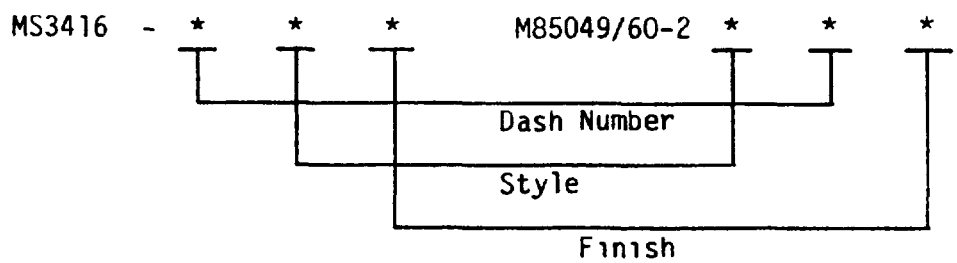

Old	New
A	W
C	W
G	A
N	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

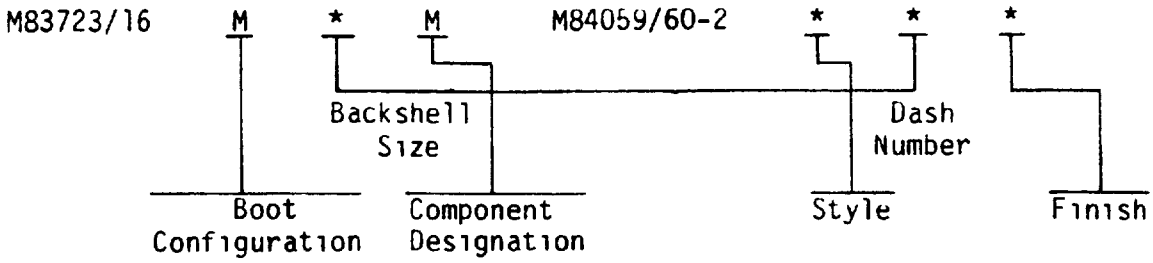

Old	New
R	W

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.
3. Dimensions apply after plating.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11,99
DLA - ES

Preparing activity:
Navy - AS
(Project No. 5935-3729-23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.