
INCH-POUND
MIL-PRF-83513/5F
15 August 1997
SUPERSEDING
MIL-C-83513/5E
31 March 1989

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, MICROMINIATURE, MOUNTING HARDWARE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-83513.

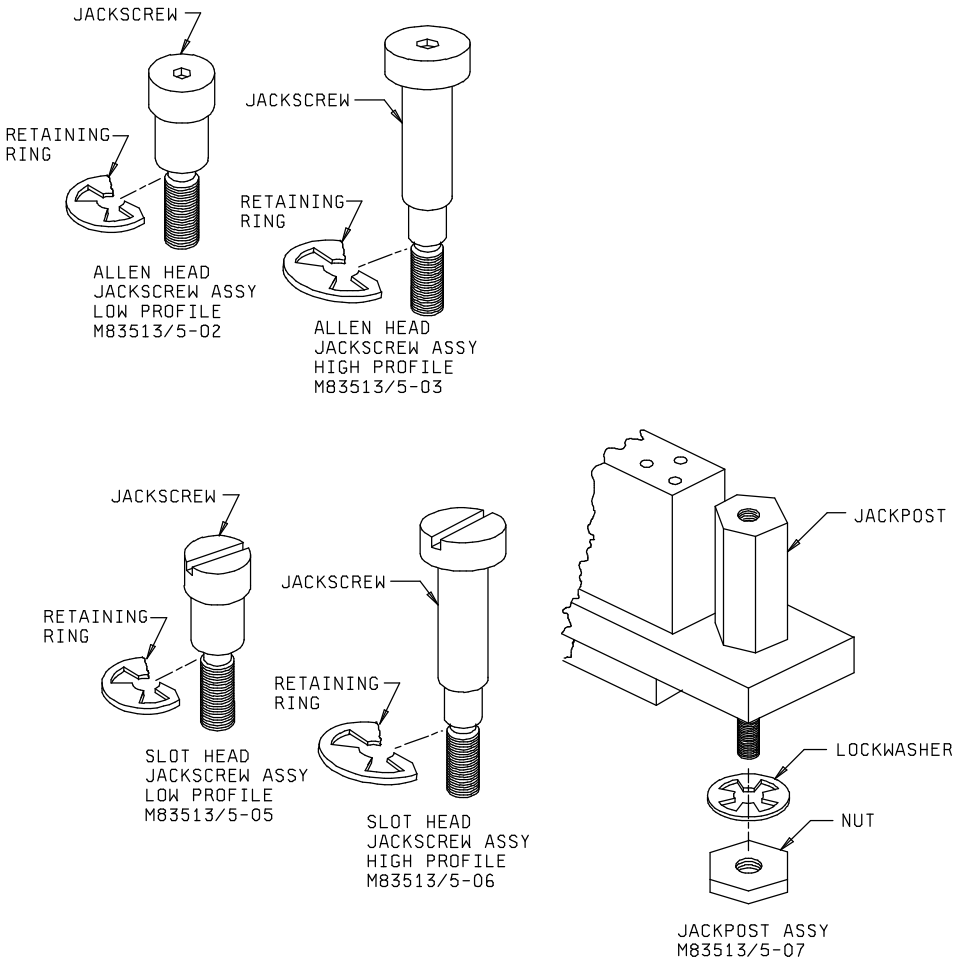


CONFIGURATION C

Configurations A and B

FIGURE 1. Mounting hardware types .050 spacing.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

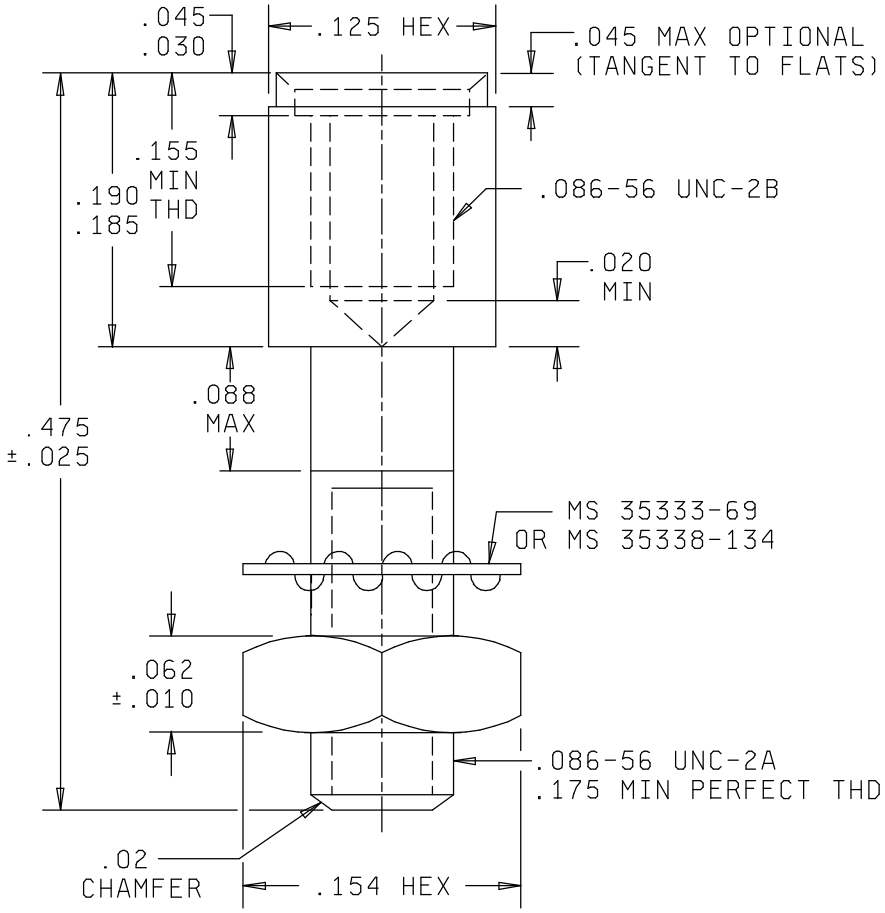

JACKPOST ASSY M83513/5-07


CONFIGURATION A

Inches	mm	Inches	mm
.010	0.25	.088	2.24
.020	0.51	.125	3.18
.025	0.64	.154	3.91
.030	0.76	.155	3.94
.040	1.02	.175	4.45
.045	1.14	.185	4.70
.062	1.57	.190	4.83
.086	2.18	.475	12.07

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

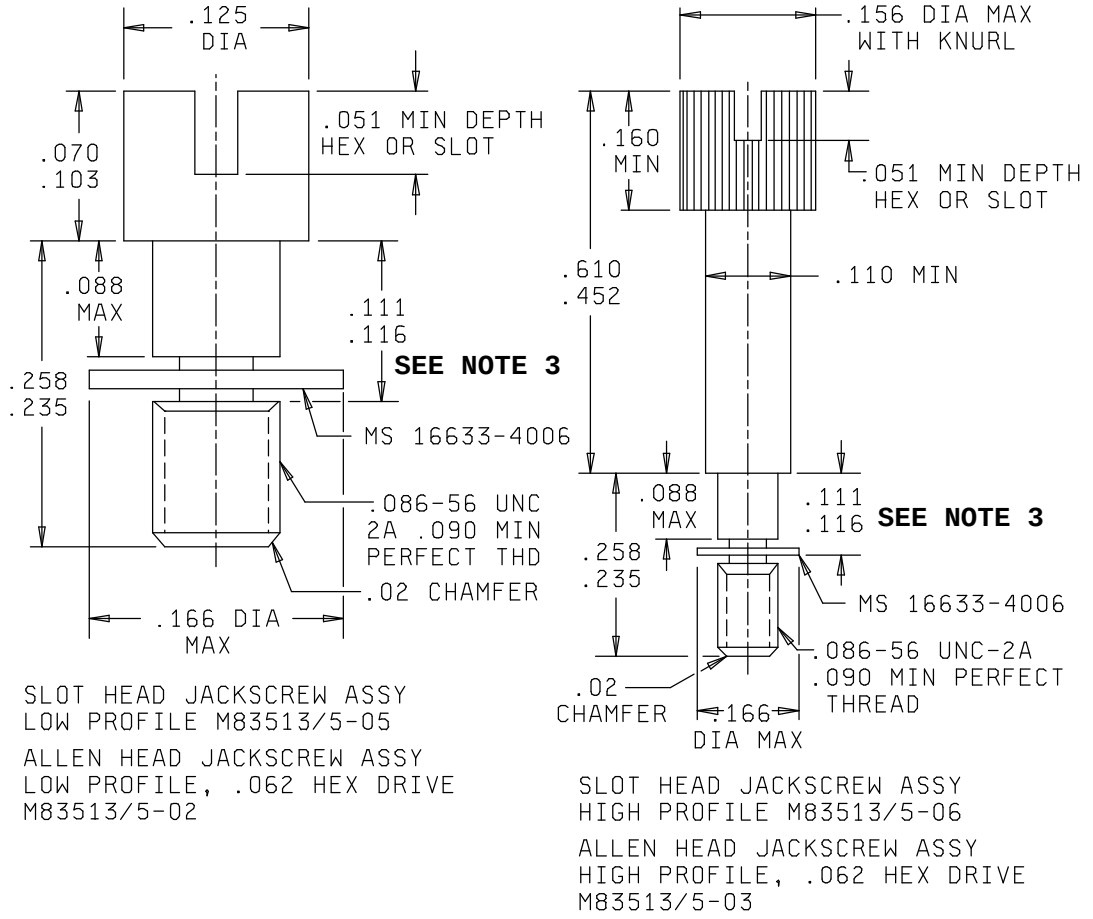

CONFIGURATION B

Inches	mm	Inches	mm
.005	0.13	.112	2.84
.02	0.51	.116	2.95
.051	.130	.118	3.00
.070	1.78	.125	3.18
.083	2.11	.156	3.96
.086	2.18	.160	4.06
.088	2.24	.166	4.22
.090	2.29	.235	5.97
.103	2.62	.240	6.10
.108	2.74	.258	6.55
.110	2.79	.452	11.48
.111	2.82	.610	15.49

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Bottom of E ring slot.

FIGURE 2. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.


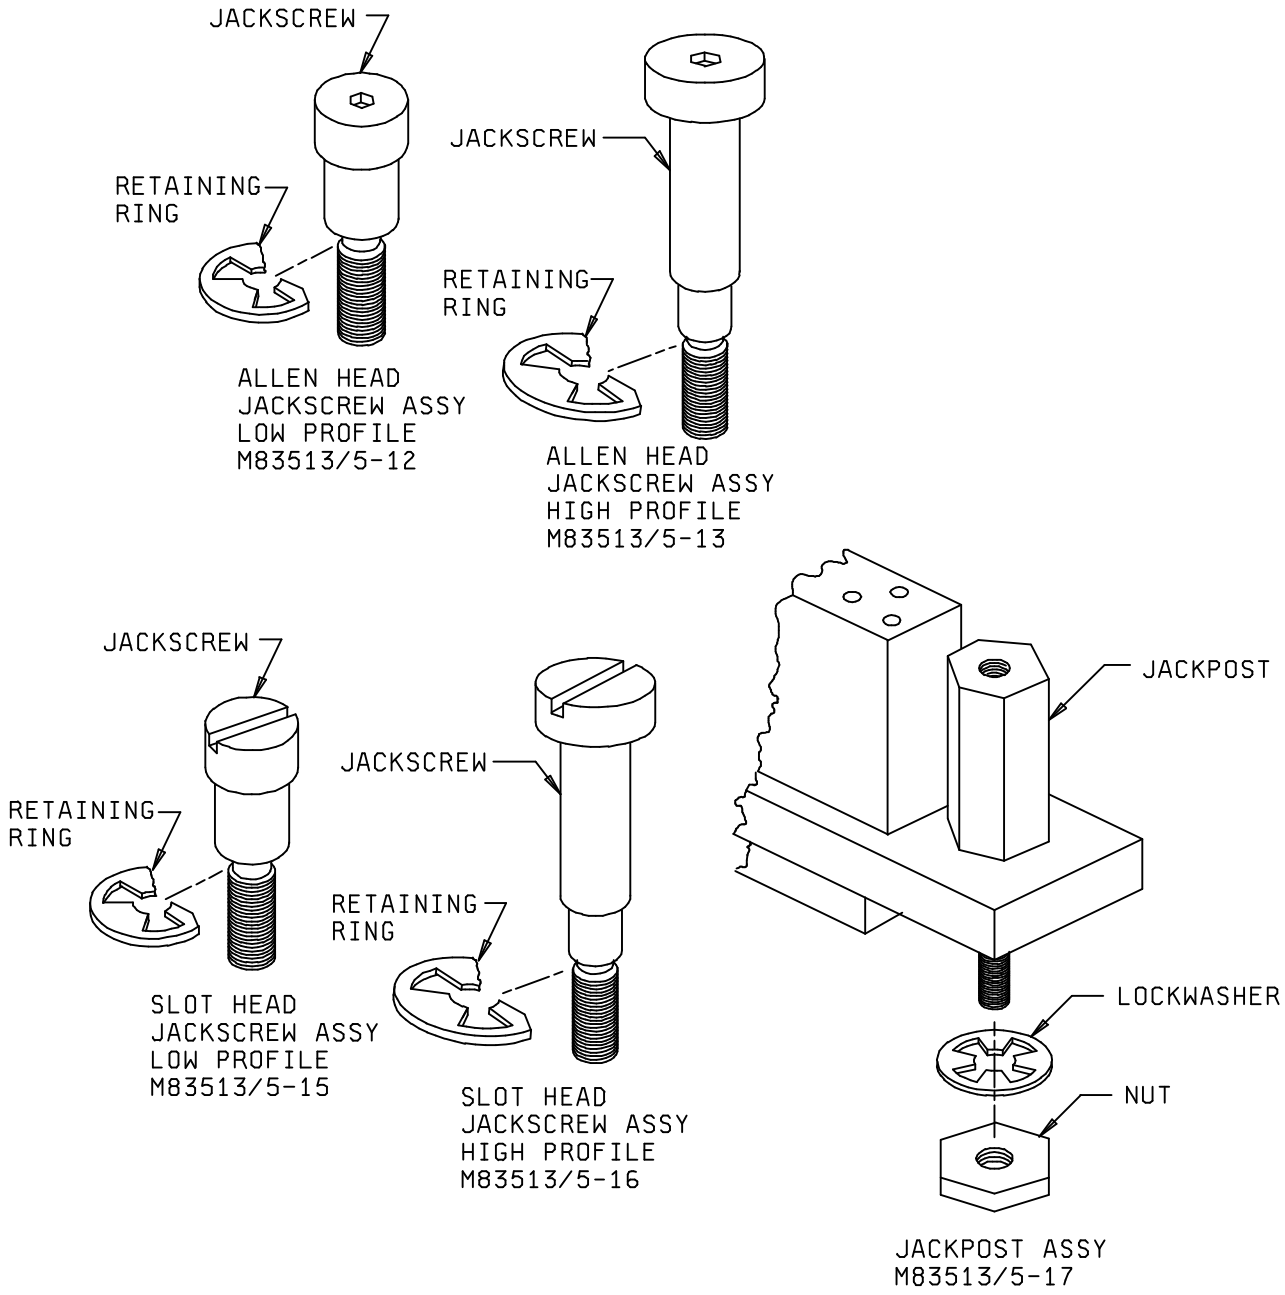


FIGURE 3. Mounting hardware types (100 cavity connectors).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

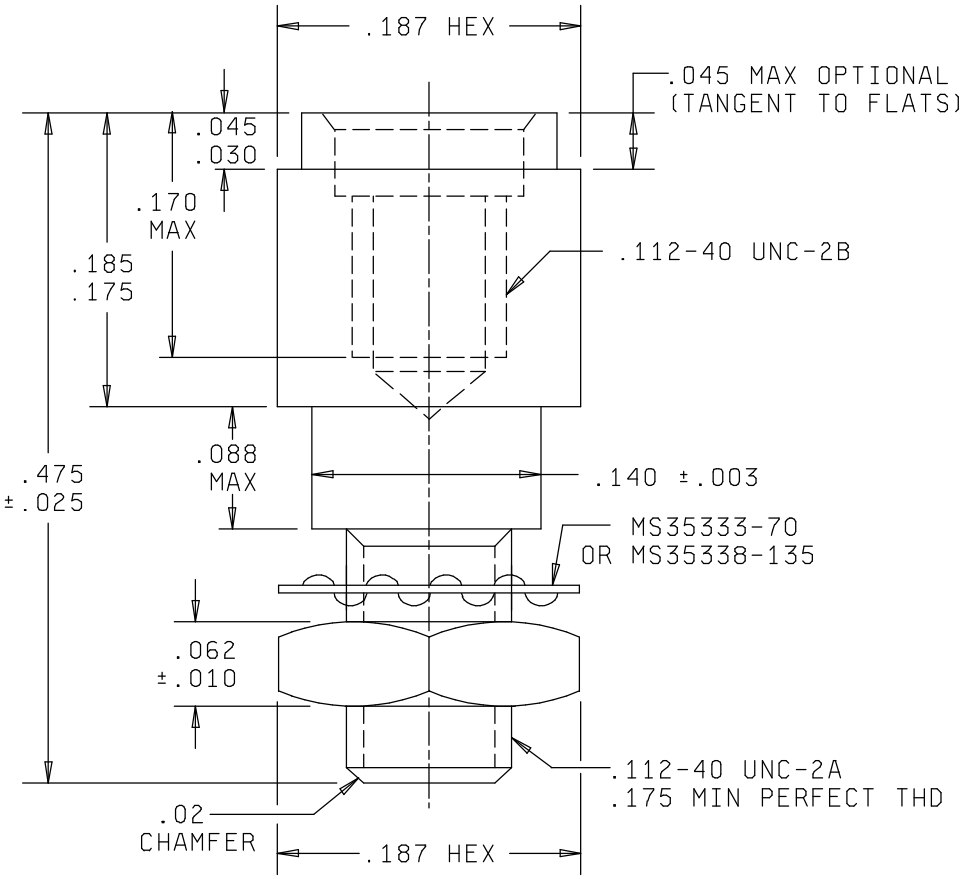

JACKPOST ASSY M83513/5-17


CONFIGURATION C

NOTE:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

Inches	mm	Inches	mm
.003	0.08	.088	2.24
.010	0.25	.112	2.84
.02	0.51	.140	3.56
.025	0.64	.170	4.32
.030	0.76	.175	4.45
.040	1.02	.185	4.70
.045	1.14	.187	4.75
.062	1.57	.475	12.07

FIGURE 4. Dimensions and configuration (100 cavity connector).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

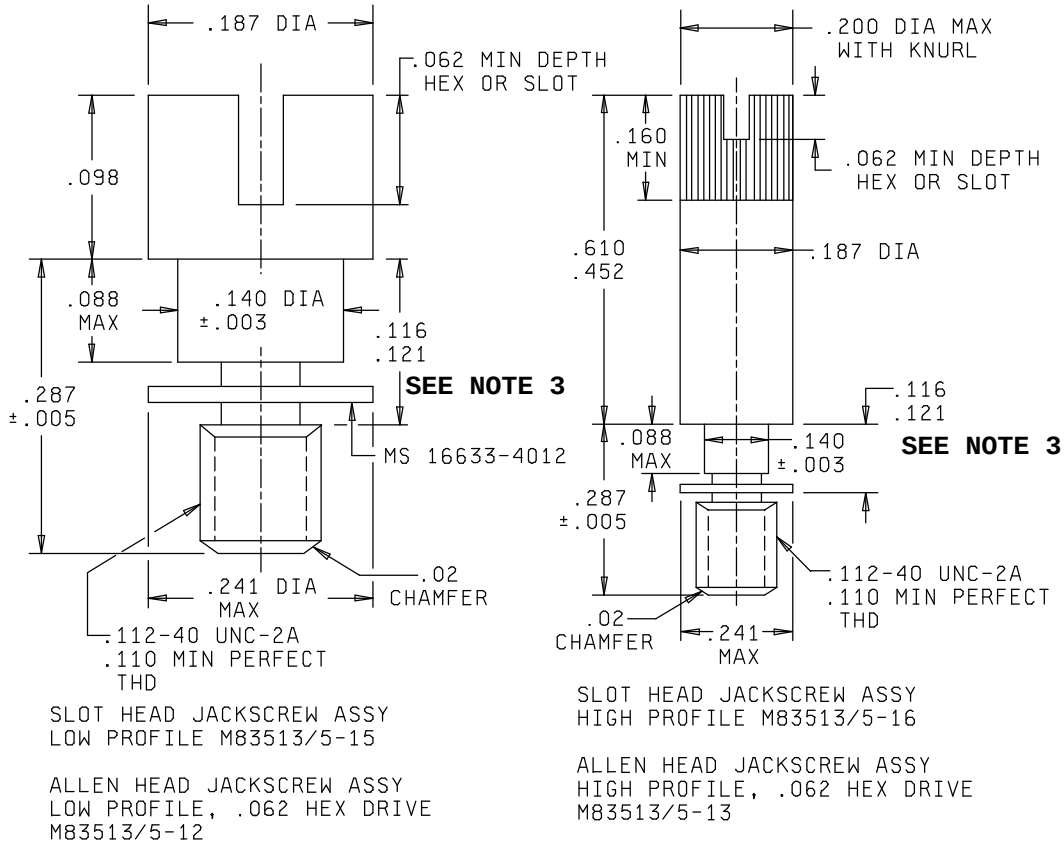

CONFIGURATION C

Inches	mm	Inches	mm
.003	0.08	.118	3.00
.005	0.13	.121	3.07
.02	0.51	.140	3.56
.062	1.57	.160	4.06
.088	2.24	.187	4.75
.098	2.49	.193	4.90
.108	2.74	.200	5.08
.110	2.79	.240	6.10
.112	2.84	.287	7.29
.116	2.95	.452	11.48
.111	2.82	.610	15.49

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Bottom of E ring slot.

FIGURE 4. Dimensions and configuration (100 cavity connector). - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 through 4.

Material and finish:

Jackscrew: Shall be corrosion resistant steel, nonmagnetic corrosion resistant steel having a minimum tensile strength of 125,000 psi.

Jackpost and nut: Corrosion resistant steel in accordance with ASTM A484 and ASTM A582, passivated in accordance with ASTM A 967

Clip and washers: Corrosion resistant steel in accordance with ASTM A 240; passivated in accordance with ASTM A 967. Does not meet the 2.0 µ permeability requirements of the basic specification.

Application:

Mounting hardware not furnished with connectors. All dash numbers fit configurations A and B connectors only (MIL-PRF-83513/1 through MIL-PRF-83513/4 and MIL-PRF-83513/6 through MIL-PRF-83513/9, except for configuration C which is for 100 cavity arrangement only and uses No. 4-40 mounting hardware. Two complete assemblies as shown are supplied with each dash number.

Installation:

M38513/5-02, -03, -05, -06, -12, -13, -15, and -16 jackscrew with retaining ring: Place jackscrew (either slotted or hex, long or low profile types) through mounting hole in connector flange then slide retaining ring into slot in jackscrew.

M83513/5-07 and -17 jackpost: Place jackpost through mounting hole in connector flange and mounting panel (if used). Place lockwasher over screw threads then screw on nut and torque as required.

Part or Identifying Number (PIN): See figures 1 through 4.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85:
NASA - NA

Review activities:
Army - AT, MI
Navy - AS, CG, MC SH
Air Force - 17, 99

Preparing activity:
DLA - CC

(Project:: 5935-4087-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:27Z
Check the source to verify that this is the current version before use.