INCH-POUND

MIL-C-83723/59C

17 Dec 1991

SUPERSEDING
MIL-C-83723/59B
16 July 1984

MILITARY SPECIFICATION SHEET

Ⓒ CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PROTECTIVE COVERS, PLUG (FOR MIL-C-26500 AND MIL-C-83723, SERIES III, CLASSES A, R, & W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓒ The requirements for acquiring the product described herein shall consist of this specification and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.


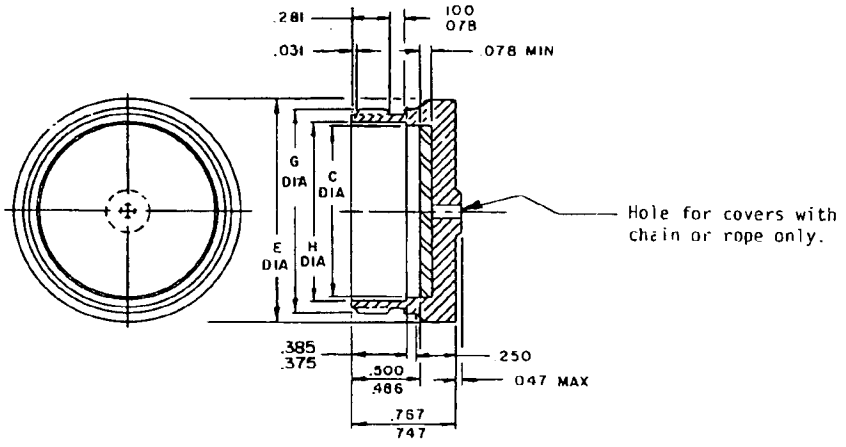


FIGURE 1. Protective cover, plug, threaded coupling M83723/59-1.

Ⓒ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

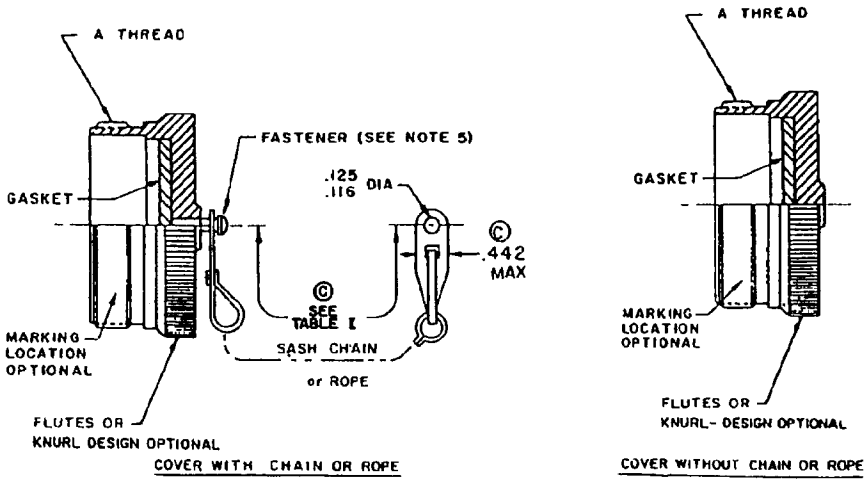

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.125	3.18	.490	12.44
.031	0.79	.250	6.35	.500	12.70
.047	1.19	.281	7.14	.747	18.97
.078	1.98	.380	9.65	.767	19.48
.100	2.54	.442	11.23	4.75	120.65
.116	2.95	.486	12.34	5.25	133.35

FIGURE 1. Protective cover, plug, threaded coupling M83723/59-1 -Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Cover dimensions - M83723/59-1.

Shell size	A UNEF-2A coupling thread	C dia. +.005 -.000	E dia. max.	G dia. max.	H dia +.005 -.000
8	.5625-24 (14.29)	.428 (10.87)	.766 (19.46)	.561 (14.25)	.475 (12.07)
10	.6875-24 (17.46)	.530 (13.46)	.906 (23.01)	.696 (17.68)	.576 (14.63)
12	.875-20 (22.23)	.700 (17.78)	1.078 (27.38)	.875 (22.23)	.746 (18.95)
14	.9375-20 (23.81)	.769 (20.22)	1.141 (28.98)	.935 (23.75)	.815 (20.70)
16	1.0626-18 (26.99)	.869 (22.76)	1.266 (32.16)	1.062 (26.97)	.942 (23.93)
18	1.1875-18 (30.16)	1.002 (25.45)	1.375 (34.93)	1.187 (30.15)	1.048 (26.62)
20	1.3125-18 (33.34)	1.127 (28.63)	1.510 (38.35)	1.312 (33.32)	1.171 (29.74)
22	1.4375-18 (36.51)	1.252 (31.80)	1.625 (41.28)	1.437 (36.50)	1.297 (32.94)
24	1.5625-18 (39.67)	1.377 (34.98)	1.760 (44.70)	1.562 (39.67)	1.420 (36.07)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance shall be +.005.
5. The method of attachment is optional. The fastener shall not become loose or be damaged when subjected to a straight axial pull of 5 pounds minimum on the chain or rope. The chain or rope shall rotate freely on the fastener.
6. These parts are intended for use as protective covers for MIL-C-83723, series III and MIL-C-26500 threaded coupling connector plugs.

FIGURE 1. Protective cover, plug, threaded coupling M83723/59-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.


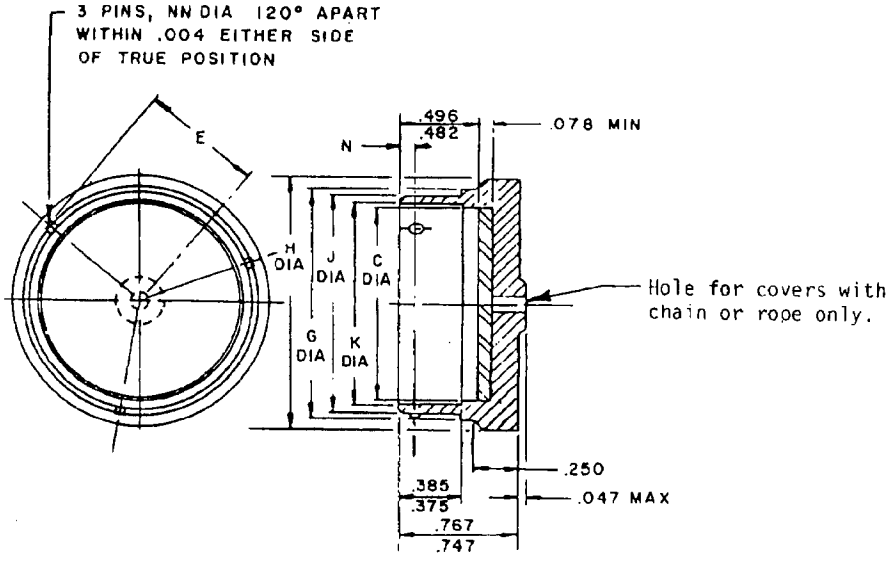


FIGURE 2. Protective cover, plug, bayonet coupling M83723/59-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

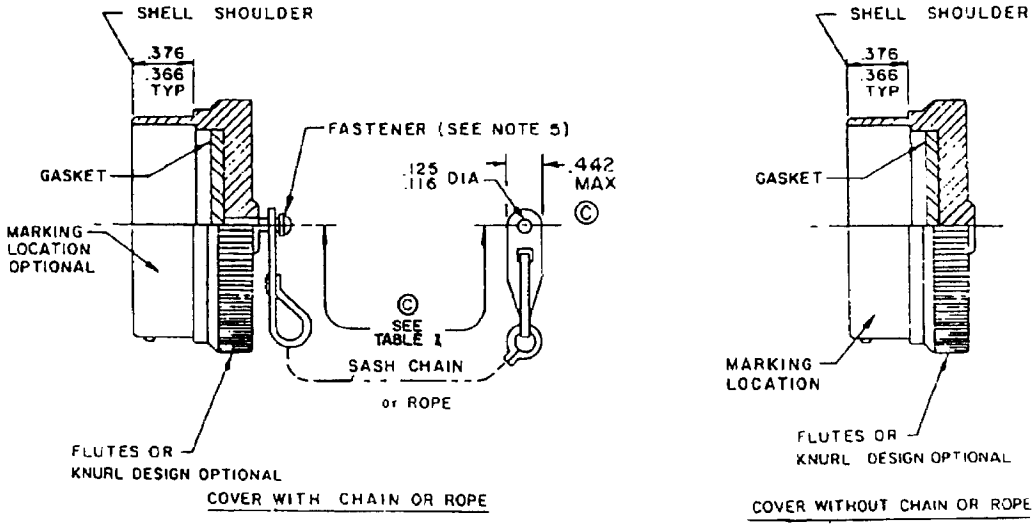

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.250	6.35	.482	12.24
.004	0.10	.366	9.30	.490	12.45
.005	0.13	.375	9.53	.496	12.60
.009	0.23	.376	9.55	.747	18.97
.047	1.19	.380	9.65	.767	19.48
.116	2.95	.385	9.78	4.750	120.65
.125	3.18	.442	11.23	5.250	133.35

FIGURE 2. Protective cover, plug, bayonet coupling M83723/59-2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Cover dimensions - M83723/59-2.

Shell size	C Dia. +.005 -.000	E +.000 -.009	G Dia. Max.	H Dia Max	J Dia +.000 -.005	K Dia +.005 -.000	N +.000 -.004	NN Dia +.000 -.003
8	.428 (10.87)	.310 (7.87)	.561 (14.25)	.766 (19.46)	.536 (13.61)	.475 (12.07)	.101 (2.57)	.078 (1.98)
10	.530 (13.46)	.374 (9.50)	.696 (17.68)	.906 (23.01)	.659 (16.74)	.576 (14.63)	.094 (2.39)	.093 (2.36)
12	.700 (17.78)	.459 (11.66)	.875 (22.23)	1.078 (27.38)	.829 (21.06)	.746 (18.95)	.094 (2.39)	.093 (2.36)
14	.769 (20.22)	.494 (12.55)	.935 (23.75)	1.141 (28.98)	.898 (22.81)	.815 (20.70)	.094 (2.39)	.093 (2.36)
16	.869 (22.76)	.557 (14.15)	1.062 (26.97)	1.266 (32.16)	1.025 (26.04)	.942 (23.93	.094 (2.39)	.093 (2.36)
18	1.002 (25.45)	.610 (15.49)	1.187 (30.15)	1.375 (34.93)	1.131 (28.73)	1.048 (26.62)	.094 (2.39)	.093 (2.36)
20	1.127 (28.63)	.673 (17.09)	1.312 (33.32)	1.510 (38.35)	1.256 (31.90)	1.171 (29.74)	.094 (2.39)	.093 (2.36)
22	1.252 (31.80)	.735 (18.67)	1.437 (36.50)	1.625 (41.28)	1.381 (35.08)	1.297 (32.94)	.094 (2.39)	.093 (2.36)
24	1.377 (34.98)	.798 (20.27)	1.562 (39.67)	1.760 (44.07)	1.506 (38.25)	1.420 (36.07)	.094 (2.39)	.093 (2.36)

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance shall be ±.005.
5. The method of attachment is optional. The fastener shall not become loose or be damaged when subjected to a straight axial pull of 5 pounds minimum on the chain or rope. The chain or rope shall rotate freely on the fastener.
6. Coupling assurance indicator shall be provided in accordance with MIL-C-83723.
7. These parts are intended for use as protective covers for MIL-C-83723, series III and MIL-C-26500 bayonet coupling connector plugs.

FIGURE 2. Protective cover, plug, bayonet coupling M83723/59-2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

(C) Material:

Cover - Aluminum alloy.

Sash chain - Stainless steel, passivated, in accordance with RR-C-271, type II, class 3.

Fastener - Stainless steel, passivated.

Rope - Insulated, stainless steel, passivated, braided or stranded.

(C) Termination style: See table I

TABLE I. Termination style.

Letter designators	Chain and rope length
C	With a chain length of 5.0 + .25
N	Without chain
R	With a rope length of 5.0 + .25
P	With a chain length of 8.0 + .25
T	With a rope length of 8.0 + .25

Fastener tensile strength shall be 5 pounds, minimum.

The chain or rope shall rotate freely on the fastener.

Gasket shall be bonded to cover or mechanically retained in cover.

Qualifications:

Examination of product.

Coupling torque.

Humidity.

Salt spray (corrosion).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Cover chain or rope and fastener tensile strength - The protective cover shall be securely held and a tensile static load of 5 pounds shall be applied to the end of the chain or rope for 5 minutes in each direction as specified:

a. Axis of chain or rope at right angles to axis of fastener.
b. Axis of chain or rope in same axis as fastener.

Air Leakage - Per MIL-STD-1344A, Method 1008 with the following conditions:

a. Use connector without contacts or insert installed.
b. Pressure differential - 10 PSI.

Air leakage rate shall not exceed 1 atmospheric cubic inch per hour (4.55×10^{-3} cm^3/s).

Marking:

Part number M83723/59 - (and dash number from figure 1 or 2), shell size, and the applicable codes for finish and termination style.


Supersession data: See table II.

TABLE II. Supersession data.

Superseding part number M83723/59-1	Superseded part number MS27292-
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9
Superseding part number M83723/59-2	**Superseded part number MS27293-**
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

(C) Part or Identifying Number (PIN) Example:

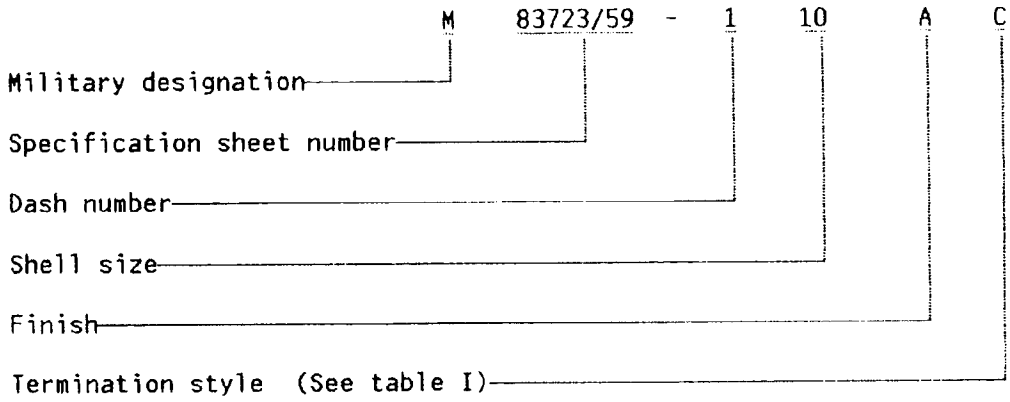

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.