
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, PIN CONTACT), (SERIES III, CLASS H)

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this document and the latest issue of MIL-C-83723.

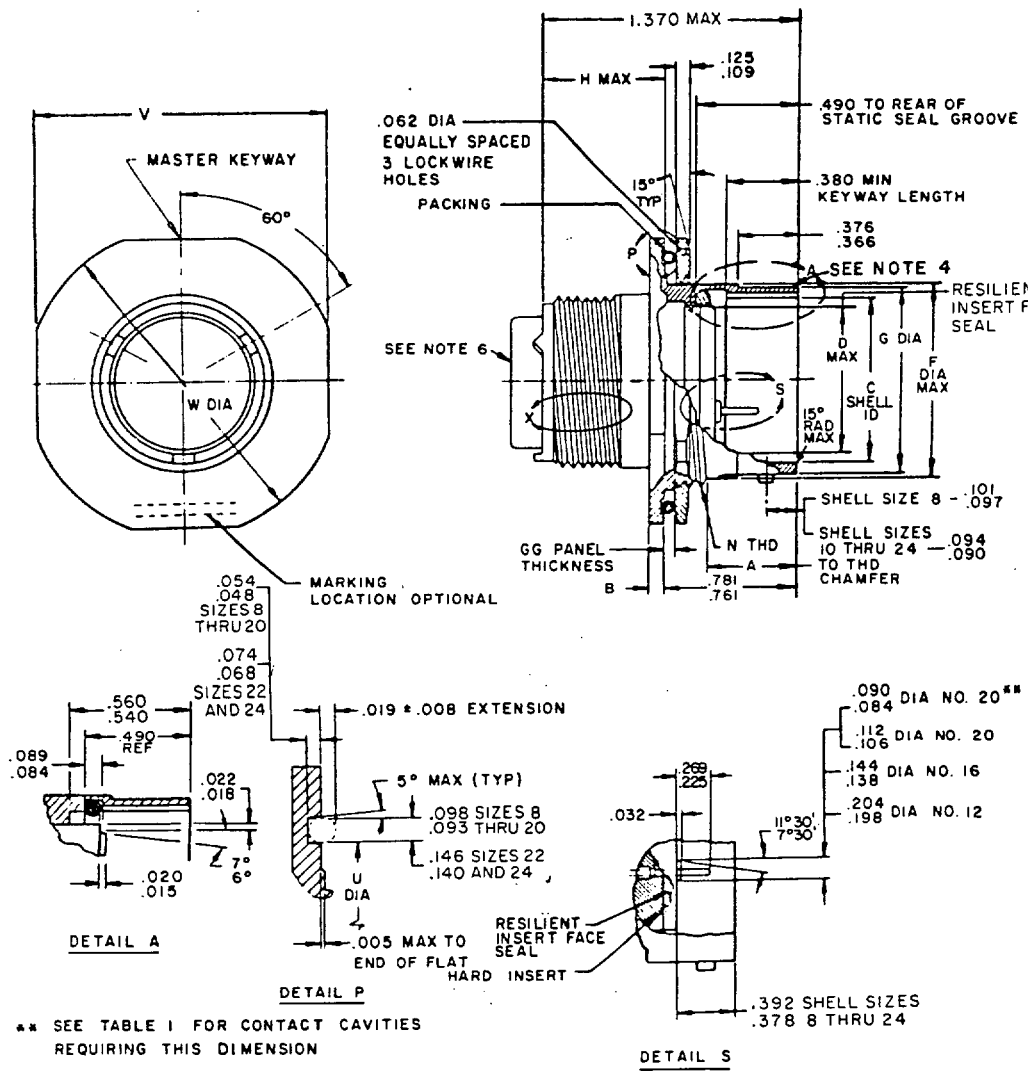

** SEE TABLE I FOR CONTACT CAVITIES REQUIRING THIS DIMENSION


FIGURE 1. Dimensions and configurations.


(B) denotes changes

FSC 5935

GOVERNMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

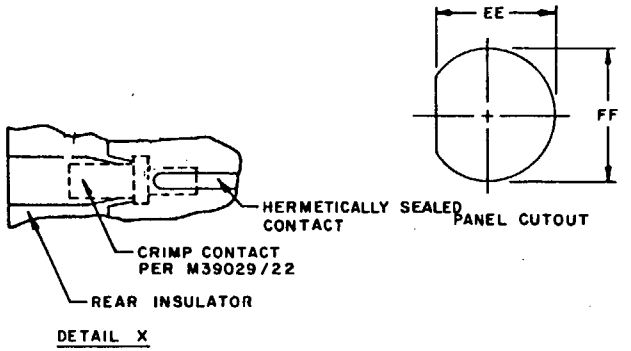

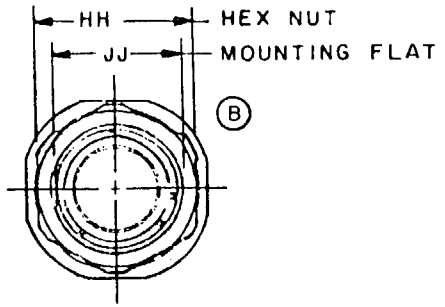

Connector dimensions.

SIZE	A	B	C	D	F	G	H	N THREAD	U	V	W	EE	FF	GG	HH (B)	JJ (B)
8	.481 .461	.137 .097	.428 .433	.312	.561	.536 .531	.589	.625-20 UN-2A	.670	.979	1.068	.605	.635	.125 .062	.829 .795	.596 .590
10	.481 .461	.137 .097	.530 .535	.388	.696	.659 .654	.589	.750-20 UNEF-2A	.777	1.104	1.192	.730	.760	.125 .062	.954 .920	.721 .715
12	.481 .461	.137 .097	.700 .705	.558	.875	.829 .824	.589	.9375-20 UNEF-2A	.965	1.291	1.380	.917	.947	.125 .062	1.142 1.108	.908 .902
14	.481 .461	.137 .097	.769 .774	.627	.935	.898 .893	.589	1.000-20 UNEF-2A	1.090	1.391	1.505	.980	1.010	.125 .062	1.205 1.171	.971 .965
16	.481 .461	.137 .097	.896 .901	.772	1.062	1.025 1.020	.589	1.125-20 UN-2A	1.215	1.516	1.630	1.105	1.135	.125 .062	1.329 1.295	1.096 1.090
18	.481 .461	.137 .097	1.002 1.007	.860	1.187	1.131 1.126	.589	1.250-18 UNEF-2A	1.340	1.641	1.756	1.225	1.260	.125 .062	1.455 1.421	1.220 1.214
20	.481 .461	.137 .097	1.127 1.132	.985	1.312	1.256 1.251	.589	1.375-18 UNEF-2A	1.465	1.766	1.860	1.350	1.385	.125 .062	1.579 1.545	1.345 1.339
22	.481 .461	.168 .128	1.252 1.257	1.110	1.437	1.381 1.376	.589	1.500-18 UNEF-2A	1.574	1.954	2.068	1.475	1.510	.125 .062	1.705 1.671	1.470 1.464
24	.481 .461	.168 .128	1.377 1.382	1.235	1.562	1.506 1.501	.589	1.625-18 UNEF-2A	1.699	2.079	2.160	1.600	1.635	.125 .062	1.829 1.795	1.595 1.589

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.269	6.83	.730	18.44	1.090	27.69	1.377	34.98
.008	.20	.312	7.92	.760	19.30	1.096	27.84	1.380	35.05
.015	.38	.366	9.30	.761	19.33	1.104	28.04	1.381	35.08
.018	.46	.376	9.55	.769	19.53	1.105	28.07	1.382	35.10
.019	.48	.378	9.60	.772	19.61	1.108	28.14	1.385	35.18
.020	.51	.380	9.65	.774	19.66	1.110	28.19	1.391	35.33
.022	.56	.388	9.86	.777	19.74	1.126	28.60	1.421	36.09
.032	.81	.392	9.96	.781	19.84	1.127	28.63	1.437	36.50
.048	1.22	.428	10.87	.795	20.19	1.131	28.73	1.455	36.96
.054	1.37	.433	11.00	.824	20.93	1.132	28.75	1.464	37.19
.062	1.57	.461	11.71	.829	21.06	1.135	28.83	1.465	37.21
.068	1.73	.481	12.22	.860	21.84	1.142	29.01	1.470	37.34
.074	1.88	.490	12.45	.875	22.23	1.171	29.74	1.475	37.47
.084	2.13	.530	13.46	.893	22.68	1.187	30.15	1.501	38.13
.089	2.26	.531	13.49	.898	22.81	1.192	30.28	1.505	38.23
.090	2.29	.535	13.59	.901	22.89	1.205	30.61	1.506	38.25
.091	2.31	.536	13.61	.902	22.91	1.214	30.84	1.510	38.35
.093	2.36	.539	13.69	.908	23.06	1.215	30.86	1.516	38.51
.094	2.39	.540	13.92	.917	23.29	1.220	30.99	1.545	39.24
.097	2.46	.558	14.17	.920	23.37	1.225	31.12	1.562	39.67
.098	2.49	.560	14.22	.935	23.75	1.235	31.37	1.574	39.98
.101	2.59	.561	14.25	.947	24.05	1.251	31.78	1.579	40.11
.106	2.69	.589	14.96	.954	24.23	1.252	31.80	1.589	40.36
.109	2.77	.590	14.99	.965	24.51	1.256	31.90	1.595	40.51
.112	2.84	.596	15.14	.971	24.66	1.257	31.93	1.600	40.64
.125	3.18	.625	15.88	.976	24.79	1.260	32.00	1.635	41.53
.128	3.25	.627	15.93	.979	24.87	1.291	32.79	1.641	41.68
.137	3.48	.635	16.13	.980	24.89	1.295	32.89	1.671	42.44
.138	3.51	.654	16.61	.985	25.02	1.312	33.32	1.705	43.31
.140	3.56	.659	16.74	1.002	25.45	1.329	33.76	1.756	44.60
.144	3.66	.670	17.02	1.007	25.58	1.339	34.01	1.766	44.86
.146	3.71	.696	17.68	1.010	25.65	1.340	34.04	1.829	46.46
.168	4.27	.700	17.78	1.020	25.91	1.345	34.16	1.860	47.24
.198	5.03	.705	17.91	1.025	26.04	1.350	34.29	2.068	52.53
.204	5.18	.715	18.61	1.062	26.97	1.370	34.80	2.079	52.81
.225	5.72	.721	18.31	1.068	27.13	1.376	34.95	2.160	54.86

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. Fully coupled indicator grooves shall be color coded blue, .025 ±.010 wide.
5. Three (3) pins to be within .004 either side of (TP) relative to master polarizing keyway.
6. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.

FIGURE 1. Dimensions and configurations - Continued.

GOVERNMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, 3
10	-6	1, 2, 3, 4, 5, 6

REQUIREMENTS:

Dimensions and configuration: See figure I.


This connector mates with MIL-C-83723/75 and 77.

For insert arrangements see MIL-STD-1554 and table I.

Contacts: Crimp socket termination per MIL-C-39029/22

"0" ring shall be furnished with connector.

Part number example:

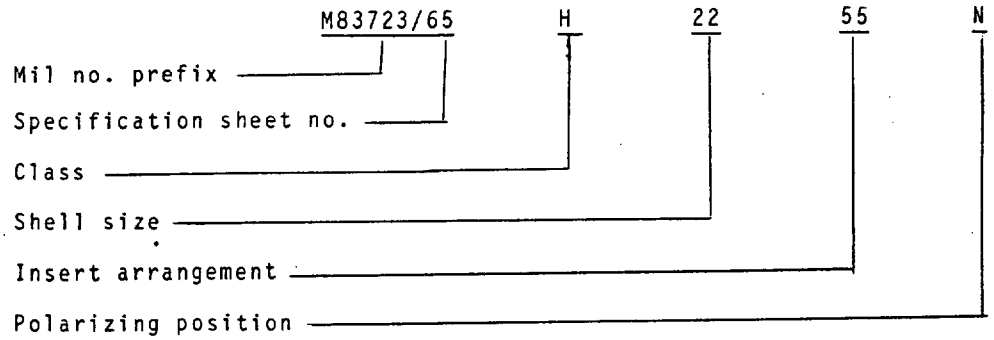

Custodians:
Air Force - 85

Preparing activity:
Air Force - 85

(Project 5935-F182)

Review activities:
Air Force - 11, 15, 17, 99
DLA - ES

☆U.S. GOVERNMENT PRINTING OFFICE: 1982—505-022/4243

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-83723/65B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

GOVERNMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

GOVERNMENT

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFALD/PTS Standardization
Gentile AFS OH 45431

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.